



# OUR STRENGTHS ARE YOUR ADVANTAGE



#### **COOPERATIVE**

As a dedicated and collaborative partner, LEDVANCE boasts a vast, worldwide sales team and over a century of experience, ensuring we stand by your side at all times.



#### **VERSATILE**

Modern, smart, decorative, functional, robust and practical – our extensive portfolio meets customer requirements in all categories and virtually every area of application.



#### **SALES-BOOSTING**

Attract attention, encourage purchases. We offer targeted support for your sales with creative, pre-tested marketing concepts.



#### **CARING**

We are committed to contributing to a greener planet by reducing  $\mathrm{CO}_2$  emissions and waste through sustainable products, solutions and processes. We empower our customers to use light more efficiently to save energy and reduce their environmental footprint.



#### UNIQUE

Fresh, dynamic, high-quality and bold – we know at an early stage what interests customers and where lighting trends are heading. LEDVANCE is unmistakably LEDVANCE.



#### **INNOVATION MEETS TRADITION**

We embody progress and the passion to shape the future of lighting actively. By blending our courage to explore new paths with our experience from more than 100 years of lighting expertise, we lead the way forward.



#### **ALL IN ONE**


At LEDVANCE, we've got everything you need from a single source – LED luminaires, lamps, and Smart Home products. We offer you a wide range of innovative and market-driven solutions, setting new trends along the way.




#### FIRST-CHOICE PARTNER

As the perfect strategic ally, we offer an extensive portfolio, a robust sales network, and unparalleled global market access to fulfill all your requirements.

### **GLOBAL PRESENCE**

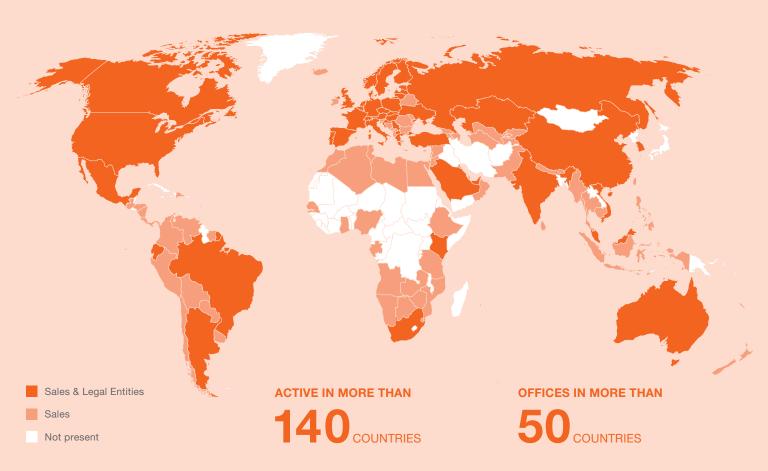

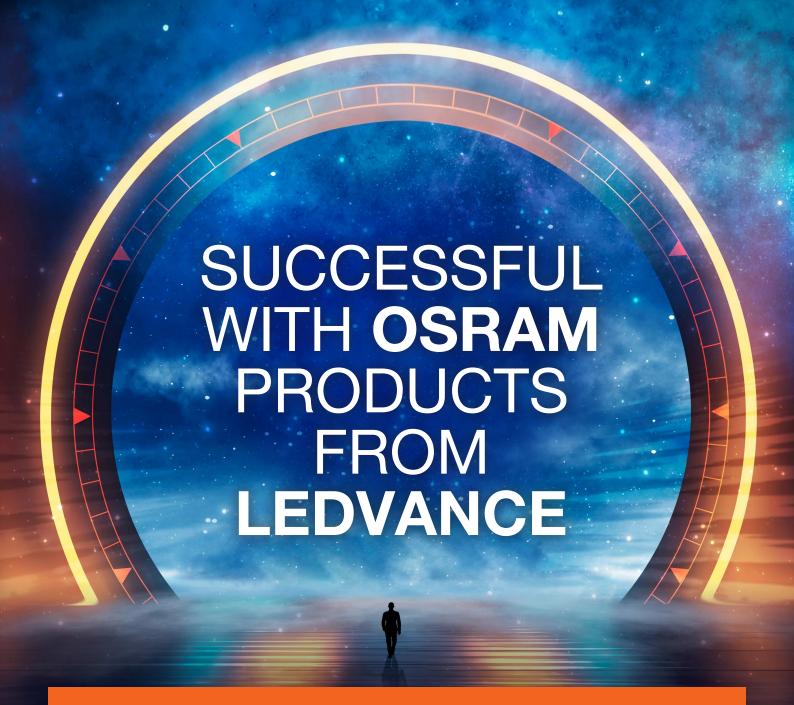

As an exclusive licence partner, LEDVANCE offers all its general lighting solutions in the well-known OSRAM brand, creating even greater potential and generating even higher sales.

#### **MAXIMUM BRAND AWARENESS: LIGHT MEANS OSRAM**

OSRAM is the ultimate lighting expert, setting standards in lighting technology around the world for well over 100 years and epitomising quality, efficiency and progressive ideas.

#### INNOVATION AND TRADITION: THE CORNERSTONE OF YOUR SUCCESS

The licencing partnership with OSRAM allows LEDVANCE to offer you the best of both worlds – a well-known brand, innovative, sustainable products and a reliable partnership.

#### MANY PRODUCTS, ONE SUPPLIER: MORE THAN 1,500 NEW OSRAM-BRANDED PRODUCTS

LEDVANCE offers a huge selection of OSRAM-branded luminaires, lamps and smart solutions – anything from decorative luminaires and work lights to outdoor lighting. And everything from a single source.

OSRAM-BRANDED LIGHTING SOLUTIONS. A STRONG BRAND THAT IS THE KEY TO YOUR SUCCESS.

### BROUGHT TO LIGHT: OUR NEW PACKAGING

Thanks to clear brand allocation, concise product information and graphic categorisation, customers can instantly find the right OSRAM product - regardless of placement.



#### **OSRAM SEAL AND CATEGORY** REFERENCE

so that the brand and application are instantly recognisable even when the product is placed horizontally

#### APPLICATION ICON

for clear categorisation











► A UNIFORM LOOK FOR **ALL PRODUCTS** 

### GOOD NEWS: OUR PRODUCT BROCHURES

Of course, we will continue to keep you posted about our product innovations and entire portfolio. You will recognise our new brochures by the OSRAM logo under the LEDVANCE lettering. And of course by their convincing content.







▶ EVERYTHING STAYS BETTER -**INCLUDING OUR COMMUNICATION** 

## SALES RIGHT DOWN THE LINE: OUR PRODUCT PRESENTATIONS AT THE POS

Our well-thought-out PoS concepts provide an attractive stage for your lighting products and also give you plenty of cross-selling options to help you generate considerable additional sales.









**ENORMOUS CROSS-SELLING POTENTIAL** 

SECONDARY PLACEMENTS

## CONTENT

LEDVANCE POWER THROUGH LIGHT	2
PRODUCTS	
UNDERCABINET LUMINAIRES	8
SMART <sup>+</sup> UNDERCABINET LUMINAIRES	10
- SMART <sup>+</sup> WIFI UNDERCABINET SLIM	10
- SMART <sup>+</sup> WIFI UNDERCABINET ROUND	12
UNDERCABINET LUMINAIRES WITH SENSOR	14
– LINEAR EDGE SENSOR	14
- LINEAR ANGLE FRAMELESS SENSOR	16
- CABINET LED SLIM SENSOR	18
- LINEAR LED SWIVEL MOBILE SENSOR	20
– LINEAR LED FLIP SENSOR	22
- LINEAR LED FLAT SENSOR	24
- LINEAR LED FLAT SENSOR USB	26
- UNDERCABINET PANEL FRAMELESS SENSOR	28
- LINEAR LED MOBILE BACKLIGHT SENSOR	30
- LINEAR LED MAGNET SENSOR	32
UNDERCABINET LUMINAIRES	34
- UNDERCABINET SOCKET FRAMELESS	34
- LINEAR TURN CONNECT	36
– LINEAR LED TURN	38
- LINEAR LED FLAT ECO	40
- LINEAR FLAT SOCKET	42
- UNDERCABINET SPOT PUCK	44
- UNDERCABINET SPOT MAGNET	46

BATTEN LUMINAIRES	48
BATTEN LUMINAIRES WITH SENSOR	50
– LED SENSOR BATTEN	50
BATTEN LUMINAIRES WITH CONNECTION VIA SCREW TERMINAL	52
- LED VALUE BATTEN	52
– LED POWER BATTEN	54
BATTEN LUMINAIRES WITH EU-PLUG	56
– LED SWITCH BATTEN	56
- TUBEKIT®	58
DAMP-PROOF LUMINAIRES	60
DAMP-PROOF LUMINAIRES WITH SENSOR	62
- SUBMARINE SENSOR	62
LINEAR DAMP-PROOF LUMINAIRES	64
- SUBMARINE RECYCLED PLASTIC	64
- SUBMARINE THROUGH-WIRING	66
- SUBMARINE INTEGRATED	68
- SUBMARINE INTEGRATED SLIM VALUE	70
- SUBMARINE	72
- DAMP-PROOF ESSENTIAL WITH	7.4
<ul><li>EXCHANGEABLE LED TUBE</li><li>DAMP-PROOF ESSENTIAL EXTRUSION</li></ul>	74 76
OVAL DAMP-PROOF LUMINAIRES	78
– LED BULKHEAD	78
- BULKHEAD ESSENTIAL	80

WORKLIGHTS	82
BATTERY-OPERATED WORKLIGHTS	84
– LED WORKLIGHT BATTERY R-STAND	84
– WORKLIGHT VALUE BATTERY POCKET	86
– WORKLIGHT VALUE BATTERY R-STAND	88
– WORKLIGHT VALUE BATTERY PANEL	90
- WORKLIGHT ESSENTIAL BATTERY PANEL	92
MAINS-OPERATED WORKLIGHTS	94
– WORKLIGHT PANEL	94
- WORKLIGHT R-STAND SOCKET	96
- WORKLIGHT S-STAND	98
– WORKLIGHT VALUE R-STAND	100
– WORKLIGHT VALUE 360° SOCKET	102
– WORKLIGHT VALUE FLEX	104
- WORKLIGHT VALUE HIGH POWER SOCKET	106
BATTERY-OPERATED TRIPODS	108
– WORKLIGHT VALUE BATTERY TRIPOD	108
MAINS-OPERATED TRIPODS	110
– WORKLIGHT TRIPOD	110
HIGHBAY LUMINAIRES	112
- HIGHBAY UFO	114
- HIGHBAY BLADE	116
POS CONCEPTS	118
GLOSSARY	120

# UNDERCABINET LUMINAIRES

Discover our convenient and easy-to-use undercabinet luminaires that brighten your shelves, cupboards and kitchen cabinets while adding style and functionality. Designed to blend seamlessly into your living spaces, all our undercabinet luminaires offer a made-to-measure lighting solution. Experience a seamless fusion of practicality and elegance, ensuring effortless management at your fingertips.

LEDVANCE introduces innovative luminaires in OSRAM brand designed to provide you with perfect lighting at every stage of your life, featuring durability, intelligent control, and exceptional versatility. With their sleek design and versatile functionality, these luminaires seamlessly integrate into your home's interior, enhancing both style and practicality. Let our innovative technology inspire you to effortlessly craft an atmosphere that not only illuminates but enriches your daily life, turning your home into a sanctuary of light and comfort.

















	works alexa with	works with Hey Google	( Sources )	works with SMART+app	<b>∻</b> w	IFI	EXTENSION LOW VOLT	DI	WAI CO		3Y GUARANTEE	
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
SMART <sup>+</sup> Wifi Undercabinet Slim 50x3.75 TW EXT SMART <sup>+</sup> Wifi Undercabinet Slim 50x3.75 TW	4099854 <b>530517</b> 4099854 <b>530494</b>	1	White	Aluminum/Plastic	30 000	8.0 9.0	480	900	27006500 27006500	≥80 > 80	120 120	IP20


Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLINED	[mm]	(mm)	(h	Ø d [mm]	
SMART <sup>+</sup> Wifi Undercabinet Slim 50x3.75 TW EXT	15 000		Not replaceable	Plug type C (EU)	Mounting equipment, Connector, Connector cable	500	38	0	_	
SMART <sup>+</sup> Wifi Undercabinet Slim 50x3.75 TW	15 000		Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Control box	500	38	8		8

<sup>\* 4099854530517</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











Product name		X P	LED MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NOLLIDER	[mm]	(mm)	(h	Ø d [mm]	
SMART <sup>+</sup> Wifi Undercabinet Round 83mm TW	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Control box	-	-	12	83	6

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Lighting that adapts to your every move. Create dynamic, flexible illumination with a simple wave of the hand or remote control.

- Adjustable: Colour temperature or RGBW light can be adapted as needed for the perfect atmosphere.
- User-friendly: Easy switching, dimming and colour control via infrared sensor or remote control.
- Practical: Quick installation and easy extension by interlinking several light strips for seamless lighting.
- Durable: Long service life of up to 30,000 hours with robust aluminium and polycarbonate construction.
- Versatile: Ideal for kitchens, living areas, shelves and other spaces where targeted, adaptable lighting is needed.





Product sizes (in mm)



300

































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im LIGHT SOURCE	K	CRI		IP	
	<u> </u>												
LINEAR EDGE SEN 30CM CCT DIM BK	4099854 <b>462931</b>	1	Black	Aluminum	30 000	4.0	310	290	3 000/4 000/6 500	≥ 80	110	IP20	15 000
LINEAR EDGE SEN 30CM CCT DIM WT	4099854 <b>462955</b>	1	White	Aluminum	30 000	4.0	310	290	3 000/4 000/6 500	≥ 80	110	IP20	15 000
LINEAR EDGE SEN 50CM CCT DIM BK	4099854 <b>462979</b>	1	Black	Aluminum	30 000	8.0	650	640	3 000/4 000/6 500	≥ 80	110	IP20	15 000
LINEAR EDGE SEN 50CM CCT DIM WT	4099854 <b>462993</b>	1	White	Aluminum	30 000	8.0	650	640	3 000/4 000/6 500	≥ 80	110	IP20	15 000
LINEAR EDGE 30CM RGBW DIM RC BK	4099854 <b>463013</b>	1	Black	Aluminum	30 000	4.0	280	230	3000 + RGB	≥ 80	110	IP20	15 000
LINEAR EDGE 30CM RGBW DIM RC WT	4099854 <b>463037</b>	1	White	Aluminum	30 000	4.0	280	230	3000 + RGB	≥ 80	110	IP20	15 000
LINEAR EDGE 50CM RGBW DIM RC BK	4099854 <b>463051</b>	1	Black	Aluminum	30 000	8.0	500	460	3000 + RGB	≥ 80	110	IP20	15 000
LINEAR EDGE 50CM RGBW DIM RC WT	4099854 <b>463075</b>	1	White	Aluminum	30,000	8.0	500	460	3000 + BGB	> 80	110	IP20	15 000

X INCL	MODULE INTEGRATED	CONNECTOR	ACCES. SORRES INCLUED	[mm]	W [mm]	(III)	Ø d [mm]	<b>6</b>
-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	300	49	18	-	8
-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	300	49	18	-	8
-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	500	49	18	-	8
-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	500	49	18	-	8
	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable, Remote control	300	49	18		8
-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable, Remote control	300	49	18	-	8
-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable, Remote control	500	49	18	-	8
	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable, Remote control	500	49	18		8
	- - - - - -	Not replaceable     Not replaceable	- Not replaceable Plug type C (EU)	Not replaceable	Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 300     Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 300     Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 500     Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 500     Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300     Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300     Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300     Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 500	Not replaceable    Plug type C (EU)	- Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 300 49 18 - Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 300 49 18 - Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 500 49 18 - Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 500 49 18 - Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 500 49 18 - Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300 49 18 - Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300 49 18 - Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300 49 18 - Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300 49 18	- Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 300 49 18 Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 300 49 18 Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 500 49 18 Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable 500 49 18 Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300 49 18 Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300 49 18 Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300 49 18 Not replaceable Plug type C (EU) Mounting equipment, Power Supply, Connector, Connector cable, Remote control 300 49 18 -

 $<sup>^{\</sup>star}$  4099854462931; 409985446295 |  $^{\star}$  4099854463013; 409985446307 |  $^{\star\prime\prime}$  4099854462979; 4099854462993 |  $^{\star\prime\prime\prime}$  4099854463051; 4099854463075 |  $^{\star\prime\prime\prime}$  4099854463013; 4099854463075 |  $^{\star\prime\prime\prime}$ 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





#### Product sizes (in mm)




















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	Im 3	Im ught source	K	CRI		IP	
Linear Angle Frameless Sensor 35cm CCT DIM Black	4099854 <b>462856</b>	1	Black	Aluminum	30 000	5.0	320	330	3 000/4 000/6 500	≥ 80	110	IP20	15 000
Linear Angle Frameless Sensor 35cm CCT DIM White	4099854 <b>462870</b>	1	White	Aluminum	30 000	5.0	320	330	3 000/4 000/6 500	≥ 80	110	IP20	15 000
Linear Angle Frameless Sensor 55cm CCT DIM Black	4099854 <b>462894</b>	1	Black	Aluminum	30 000	7.5	480	490	3 000/4 000/6 500	≥ 80	110	IP20	15 000
Linear Angle Frameless Sensor 55cm CCT DIM White	4099854 <b>462917</b>	1	White	Aluminum	30 000	7.5	480	490	3 000/4 000/6 500	≥ 80	110	IP20	15000

Product name	X NCL.	MODULE NYTEGRATED	CONNECTOR	ACCE- BORES HOLLOS	[mm]	W [mm]	(h	Ø d [mm]	
Linear Angle Frameless Sensor 35cm CCT DIM Black	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	300	49	18	-	8
Linear Angle Frameless Sensor 35cm CCT DIM White	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	300	49	18	-	8
Linear Angle Frameless Sensor 55cm CCT DIM Black	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	500	49	18	-	8
Linear Angle Frameless Sensor 55cm CCT DIM White	_	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	500	49	18	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

# CABINET LED SLIM SENSOR Instant brightness, effortless control - light up your space with a simple gesture. - Intuitive control: Turn on and off with hand motion in front of the sensor for contactless operation. Infinitely dimmable: Brightness can be adjusted by covering the sensor to create desired lighting mood. - Slim design: Slim aluminium housing integrates discreetly into various applications and offers a modern look. Simple installation: Mounted easily on almost any surface using included adhesive strips or screws. - Application areas: Ideal for shelf, undercabinet, and workspace lighting, bringing bright, focused illumination to kitchens, living areas, and display cabinets.

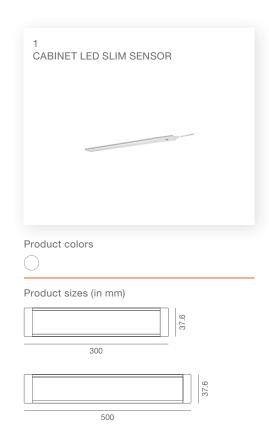



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	3 оптрит	Im ught source	K	CRI		IP
Cabinet LED Slim Sensor 300mm	4099854 <b>462337</b>	1	White	Plastic (PC, AN)	30 000	6.0	250	480	3 000	≥80	110	IP20
Cabinet LED Slim Sensor 500mm	4099854 <b>462375</b>	1	White	Plastic (PC, AN)	30 000	10.0	470	810	3 000	≥80	100	IP20
Cabinet LED Slim Sensor 300mm Two Light	4099854 <b>462351</b>	1	White	Plastic (PC, AN)	30 000	11.0	530	960	3 000	≥80	110	IP20
Cabinet LED Slim Sensor 500mm Two Light	4099854 <b>462399</b>	1	White	Plastic (PC, AN)	30 000	18.0	980	1 620	3 000	≥80	110	IP20

Product name		X NCL.	LED MODULE NTEGRATEO	CONNECTOR	ACCES- SOURES INCLUSED	[mm]	W [mm]	(h	Ø d [mm]	
Cabinet LED Slim Sensor 300mm	100 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply	300	38	8		8
Cabinet LED Slim Sensor 500mm	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply	500	38	8	-	8
Cabinet LED Slim Sensor 300mm Two Light	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector	300	38	8	-	8
Cabinet LED Slim Sensor 500mm Two Light	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector	500	38	8	-	8


<sup>\* 4099854462351; 4099854462399</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

# LINEAR LED SWIVEL SENSOR Our stylish and practical undercabinet luminaire is designed to provide efficient and adaptable light for any setting. - Functional & practical: With warm white light colour, fixed LED module and magnetically adjustable body. Long life: Designed for durability, it offers up to 30,000 hours of use while being energy-efficient, ensuring long-term savings. Sensor control: PIR motion and daylight sensor. Instant use: Very easy to install and ideal for under shelves, cabinets and kitchen cupboards. - IP20 protection: Suitable for use in kitchens and living rooms, though it is not protected against water or moisture.











Product name		X Noc.	LED MODULE BITEGRATED	CONNECTOR	ACCES- SORIES INCLUMEN	[mm]	W [mm]	h	Ø d [mm]	<b>6</b>
Linear LED Swivel 5W 3000K	15 000	_	Not replaceable	-	Mounting equipment, USB cable	350	49	36	_	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser








				Sensor (((•	USB	-C	TURNABLE		WA	IRM GHT	3Y PARTIAL GUARANTEE	
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	3 оптрит	Im ught source	K	CRI		IP
Linear LED Flip 5W 3000K	4099854 <b>462832</b>	1	White	Plastic (PC)	30 000	4.5	250	270	3 000	> 80	120	IP20

Product name		X P	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUED	[mm]	w [mm]	(h	Ø d [mm]	
Linear LED Flip 5W 3000K	15 000	-	Not replaceable	-	Mounting equipment, USB cable	305	49.1	25.5	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












Product name		X PICL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- BORIES INCLUSED	[mm]	(mm)	(h	Ø d [mm]	
Linear LED Flat Sensor 12W 3000K	100 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	527	67	19	_	8
Linear LED Flat Sensor 12W 4000K	100 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	527	67	19	-	8

<sup>\* 4099854532337 | \*\* 4099854532351</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





0 4 400


















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	thi 2	W	оптрит 3	Im 4	K	CRI		P
Linear LED Flat Sensor + USB 400mm	4099854 <b>462597</b>	1	Gray	Aluminum/Plastic	25 000	3.2	200	270	3000 / 4000 / 6500	> 80	110	IP20
Linear LED Flat Sensor + USB 600mm	4099854 <b>462672</b>	1	Gray	Aluminum/Plastic	25 000	4.0	270	340	3000 / 4000 / 6500	> 80	110	IP20

Product name		NCL.	LED MODULE NTEGRATIO	CONNECTOR	ACCES- SORES NOTICE	[mm]	W	(h	Ø d [mm]	
Linear LED Flat Sensor + USB 400mm	12500	-	Not replaceable	USB	Mounting equipment, USB cable	400	40	9	-	8
Linear LED Flat Sensor + USB 600mm	12500	_	Not replaceable	USB	Mounting equipment, USB cable	600	40	9	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



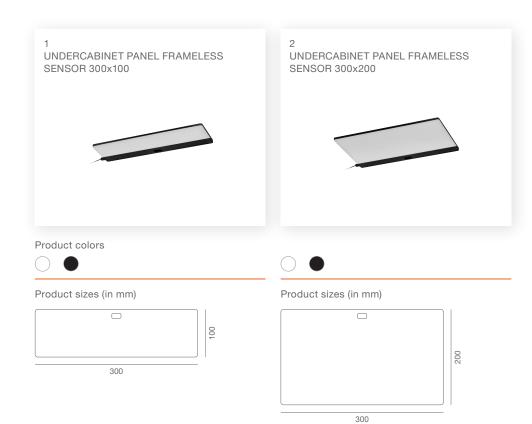

















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> <sub>[h]</sub> <sup>2</sup>	W	оптрит 3	Im 4	K	CRI		IP
Undercabinet Panel Frameless 30x10cm CCT DIM Black	4099854 <b>463099</b>	1	Black	Plastic (PC)	30 000	5.0	220	250	3 000/4 000/6 500	≥ 80	110	IP20
Undercabinet Panel Frameless 30x10cm CCT DIM White	4099854 <b>463112</b>	1	White	Plastic (PC)	30 000	5.0	220	250	3 000/4 000/6 500	≥ 80	110	IP20
Undercabinet Panel Frameless 30x20cm CCT DIM Black	4099854 <b>463150</b>	2	Black	Plastic (PC)	30 000	7.5	450	470	3 000/4 000/6 500	≥ 80	110	IP20
Undercabinet Panel Frameless 30x20cm CCT DIM White	4099854 <b>463174</b>	2	White	Plastic (PC)	30 000	7.5	450	470	3 000/4 000/6 500	≥ 80	110	IP20

Product name		X O	MODULE NITEGRATED	CONNECTOR	ACCES SORIES PICLUSED	[mm]	W [mm]	(h)	Ø d [mm]	
Undercabinet Panel Frameless 30x10cm CCT DIM Black	15 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	300	100	8	_	4
Undercabinet Panel Frameless 30x10cm CCT DIM White	15 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	300	100	8	-	4
Undercabinet Panel Frameless 30x20cm CCT DIM Black	15 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	300	200	8	-	4
Undercabinet Panel Frameless 30x20cm CCT DIM White	15 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	300	200	8	-	4

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> <sub>[h]</sub>	W	im очтрит	Im UGHT SOURCE	K	CRI		P
Linear LED Mobile Backlight sensor 200mm	4099854 <b>531897</b>	1	White	Aluminum/Polycarbonate (PC)	20 000	1.0	50	-	4000	> 80	-	IP20
Linear LED Mobile Backlight sensor 400mm	4099854 <b>532016</b>	1	White	Aluminum/Polycarbonate (PC)	20 000	1.0	70	-	4000	> 80	-	IP20

Product name	X NCL.	LED MODULE affEGRATED	CONNECTOR	ACCES- SORIES NCCUSED	[mm]	W [mm]	(h)	Ø d [mm]	
Linear LED Mobile Backlight sensor 200mm	 	Not replaceable	USB		256	46	A1		
Linear LED Mobile Backlight sensor 400mm	 	Not replaceable	USB		451	46	41		8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



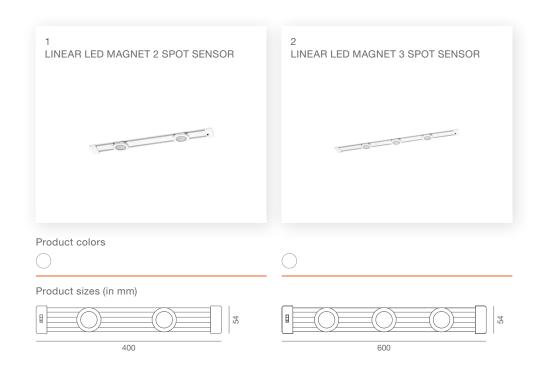














Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th	W	ОПТРИТ	LIGHT SOURCE	K	CRI		IP
Linear LED Magnet 2 Spot Sensor 7W 840 DIM	4099854 <b>462290</b>	1	White	Aluminum/Plastic	30 000	7.0	400	_	4000	> 80	120	IP20
Linear LED Magnet 3 Spot Sensor 9.5W 840 DIM	4099854 <b>462313</b>	2	White	Aluminum/Plastic	30 000	9.5	600	-	4000	> 80	120	IP20

Product name		X NCL.	LED MODULE STEGRATED	COMMECTOR	ACCES- SORIES NCLUSED	[mm]	W [mm]	(h	Ø d [mm]	
Linear LED Magnet 2 Spot Sensor 7W 840 DIM	_		Not replaceable	Plug type C (EU)	-	445	71	59		8
Linear LED Magnet 3 Spot Sensor 9.5W 840 DIM	_	_	Not replaceable	Plug type C (EU)	-	645	71	59	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



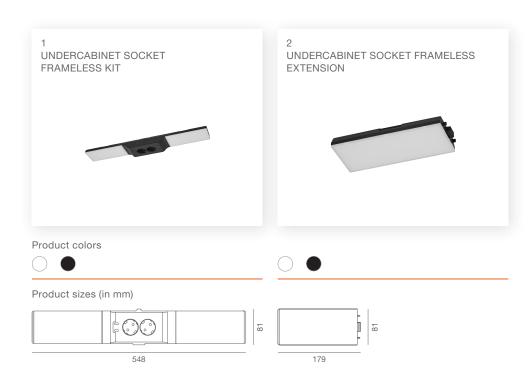





rroduct name		X NOL.	MODULE WTEGRATED	CONNECTOR	ACCES- SORIES NICLUDED	[mm]	(mm)	h	d [mm]	<u></u>
Undercabinet Socket Frameless Kit 830 DIM USB Black	15 000		Not replaceable	Plug type F (EU)	Mounting equipment, Power supply	548	81	41	_	6
Undercabinet Socket Frameless Extension 830 DIM Black	15 000	_	Not replaceable		Mounting equipment	179	81	21	-	8
Undercabinet Socket Frameless Kit 830 DIM White	15 000		Not replaceable	Plug type F (EU)	Mounting equipment, Power supply	548	81	41	-	6
Undercabinet Socket Frameless Extension 830 USB DIM White	15000	-	Not replaceable	_	Mounting equipment	179	81	21	-	8

<sup>\* 4099854463211; 4099854463273 | \*\* 4099854463235; 4099854463297</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Adapt your lighting with precision – tilt, adjust, and perfect your ambience.

- Tiltable: Tilt function (60°) enables individual adjustment of the lighting surface, perfect for adapting to different requirements.
- Adjustable: Colour temperature can be adjusted in three stages by pressing the button individually to create the ideal lighting atmosphere.
- User-friendly: Continuous dimming by pressing and holding the button for more than one second, simple and intuitive to use.
- Efficient: Service life of up to 30,000 hours ensures a reliable and long-lasting lighting solution in various areas.
- Versatile: The light is perfect where targeted lighting is required, e.g. in kitchens, living areas and shelves. The LED is not replaceable.















## Product sizes (in mm)





557





















Product name	GIIN (EAN)	No.	COLOR	MATERIAL	t <sub>[h]</sub> <sup>2</sup>	W	оптрит 3	LIGHT SOURCE 4	K	CRI		IP	
	<u> </u>								<u> </u>				
Linear Turn Connect 35cm CCT DIM Black	4099854 <b>462733</b>	1	Black	Aluminum		6.0	380	450	3 000/4 000/6 500	≥ 80	110	IP20	15 000
Linear Turn Connect 35cm CCT DIM White	4099854 <b>462757</b>	1	White	Aluminum		6.0	380	450	3 000/4 000/6 500	≥ 80	110	IP20	15 000
Linear Turn Connect 55Cm CCT DIM Black	4099854 <b>462771</b>	1	Black	Aluminum		10.0	620	700	3 000/4 000/6 500	≥ 80	110	IP20	15 000
Linear Turn Connect 55cm CCT DIM White	4099854 <b>462795</b>	1	White	Aluminum	_	10.0	620	700	3 000/4 000/6 500	> 80	110	IP20	15 000

Product name	X P	LED MODULE INTEGRAZED	CONNECTOR	ACCES SORIES INCLUERD	[mm]	W [mm]	(h	Ø d [mm]	
Linear Turn Connect 35cm CCT DIM Black	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	357	60	24	-	8
Linear Turn Connect 35cm CCT DIM White	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	357	60	24	_	8
Linear Turn Connect 55Cm CCT DIM Black	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	557	60	24	_	8
Linear Turn Connect 55cm CCT DIM White	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	557	60	24	-	8

<sup>\* 4099854462733; 4099854462757 | \*\* 4099854462771; 4099854462795</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

# LINEAR LED TURN Flexible lighting solutions that move with your daily rhythm. - Tilt function: The tilt function enables targeted light direction and flexible lighting adjustment as needed. Homogeneous light: The light provides uniform illumination without shadows or uneven light distribution. Plug-in system: Multiple lights can be quickly connected using the user-friendly plug-in system. Expandable: Up to 10 lights can be linked to illuminate larger areas efficiently. Ideal for interiors: Perfect for shelf undercabinet lighting and other interior applications, providing a discreet functional lighting solution.



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
Linear LED Turn 357mm	4099854 <b>462696</b>	1	Silver	Aluminum	30 000	6.0	380	650	3 000	> 80	100	IP20
Linear LED Turn 557mm	4099854 <b>462719</b>	1	Silver	Aluminum	30 000	10.0	620	1 000	3 000	> 80	100	IP20

Product name		X NCL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- DOMES RALLING	[mm]	W	(h	Ø d [mm]	
Linear LED Turn 357mm	30 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector cable	357	60	24	_	8
Linear LED Turn 557mm	30 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector cable	557	60	24	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Small in size, big on impact – enjoy practical lighting that fits any space.

- Expandable: Chain up to 43 lights for large-area lighting solutions. ECO version shown.
- Complete set: Includes cables and EU plug for easy installation without additional accessories.
- Space-saving: Flat design for discreet mounting, ideal for undercabinet applications with limited space.
- Ideal for under-shelf lighting: Optimal solution for targeted illumination of shelves and work surfaces.



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>[h]</sub> <sup>2</sup>	W	оптрит 3	Im 4	K	CRI		IP	
Linear LED Flat Eco 6W 3000K	4099854 <b>462474</b>	1	Silver	Aluminum	20 000	6.0	300	480	3 000	> 80	120	IP20	100 000
Linear LED Flat Eco 6W 4000K	4099854 <b>462511</b>	1	Silver	Aluminum	20 000	6.0	320	520	4000	> 80	120	IP20	100 000

Product name	X P	LED MODULE NTEGRATED	CORRECTOR	ACCES- SONED Recurso	[mm]	W [mm]	(h)	Ø d [mm]	
Linear LED Flat Eco 6W 3000K	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	370	67	22	_	8
Linear LED Flat Eco 6W 4000K	_	Not replaceable	Plug type C (EU)	Mounting equipment, Power Supply, Connector, Connector cable	370	67	22	-	8

<sup>\* 4099854462474 | \*\* 4099854462511</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	thj <sup>2</sup>	W	<b>Іт</b> 3	Im ught source	K	CRI		IP
Linear Flat Socket USB 540mm 10W 4000K	4099854 <b>462559</b>	1	White	Aluminum/Plastic	30 000	10.0	800	1100	4000	> 80	120	IP20

Product name		X PICL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SOMES NOCUMED		W [mm]	h	Ø d [mm]	
Linear Flat Socket USB 540mm 10W 4000K	15 000	-	Not replaceable	Plug type F (EU)	Mounting equipment	540	81	42	-	8


<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>Іт</b> 3	Im ught source	K	CRI		P
Undercabinet Spot Puck 65mm 3 x 3W White	4099854 <b>462412</b>	1	White	Aluminum/Plastic	30 000	3.0	3x250	3x300	3 000	> 80	120	IP20
Undercabinet Spot Puck 65mm 3 x 3W Black	4099854 <b>462436</b>	1	Black	Aluminum/Plastic	30 000	3.0	3x250	3x300	3 000	> 80	120	IP20

Product name		NCL.	LED MODULE affEGRATED	CONNECTOR	ACCES- SORIES INCLUED	[mm]	W	(h	Ø d [mm]	
Undercabinet Spot Puck 65mm 3 x 3W White	15 000		Not replaceable	Cable, 3-pole	Mounting equipment			19	65	24
Undercabinet Spot Puck 65mm 3 x 3W Black	15 000	_	Not replaceable	Cable, 3-pole	Mounting equipment	_	-	19	65	24

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
Undercabinet Spot Magnet 75mm 8.5W 3000K	4099854 <b>462450</b>	1	White	Aluminum/Plastic	30 000	8.5	390	690	3 000	> 80	120	IP20

Product name		X NCL.	LED MODULE SITEGRATED	CONNECTOR	ACCES- SORES VOCUED		W [mm]	(h	Ø d [mm]	
Undercabinet Spot Magnet 75mm 8.5W 3000K	15 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply	-	-	7	75	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









# Product sizes (in mm)



1 173
















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	оптрит 3	Im ught source	K	CRI		IP
LED Sensor Batten 320mm 4W 3000K	4099854 <b>532498</b>	1	White	Plastic	50 000	4.0	400	450	3 000	> 80	180	IP20
LED Sensor Batten 600mm 8W 3000K	4099854 <b>532511</b>	1	White	Plastic	50 000	8.0	800	900	3 000	> 80	180	IP20
LED Sensor Batten 1200mm 14W 3000K	4099854 <b>532436</b>	1	White	Plastic	50 000	14.0	1 400	1 600	3 000	> 80	180	IP20


Product name		NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUSED	[mm]	W	(h	Ø d [mm]	
LED Sensor Batten 320mm 4W 3000K	100 000		Not replaceable	Plug type C (EU)		313	28	36	_	8
LED Sensor Batten 600mm 8W 3000K	100 000	-	Not replaceable	Plug type C (EU)	-	573	28	36	-	8
LED Sensor Batten 1200mm 14W 3000K	100 000	-	Not replaceable	Plug type C (EU)	-	1 173	28	36	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th 2	W	<b>lm</b> 3	Im ught source	K	CRI		IP
LED Value Batten 600 mm 10 W 4000 K	4099854 <b>532832</b>	1	Silver	Aluminum	30 000	10.0	1 000	1 300	4000	≥80	150	IP20
LED Value Batten 1200 mm 20 W 4000 K	4099854 <b>532894</b>	1	Silver	Aluminum	30 000	20.0	2000	2500	4000	≥80	150	IP20
LED Value Batten 1500 mm 24 W 4000 K	4099854 <b>532955</b>	1	Silver	Aluminum	30 000	24.0	2400	3 000	4000	≥80	150	IP20

Product name		X NCL.	LED MODULE RITEGRATED	CONNECTION TYPE	ACCES- SORIES INCLUSED	[mm]	W [mm]	(h	Ø d [mm]	
LED Value Batten 600 mm 10 W 4000 K	100 000	_	Not replaceable	Screw terminal	Mounting screws, Plastic dowels	634	29	44	-	20
LED Value Batten 1200 mm 20 W 4000 K	100 000	_	Not replaceable	Screw terminal	Mounting screws, Plastic dowels	1 234	29	44	_	20
LED Value Batten 1500 mm 24 W 4000 K	100 000	_	Not replaceable	Screw terminal	Mounting screws, Plastic dowels	1 534	29	44	_	10

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im 4	K	CRI		IP
LED Power Batten 600 mm 12 W 3000 K	4099854 <b>536816</b>	1	White	Steel	25 000	12.0	1 260	1 540	3 000	≥80	110	IP20
LED Power Batten 600 mm 12 W 4000 K	4099854 <b>536830</b>	1	White	Steel	25 000	12.0	1 320	1 620	4000	≥80	110	IP20
LED Power Batten 600 mm 25 W 3000 K	4099854 <b>536854</b>	1	White	Steel	25 000	25.0	2375	3 2 2 0	3 000	≥80	110	IP20
LED Power Batten 600 mm 25 W 4000 K	4099854 <b>536885</b>	1	White	Steel	25 000	25.0	2500	3 380	4000	≥80	110	IP20
LED Power Batten 1200 mm 25 W 3000 K	4099854 <b>536908</b>	2	White	Steel	25 000	25.0	2600	3 2 2 0	3 000	≥80	110	IP20
LED Power Batten 1200 mm 25 W 4000 K	4099854 <b>536922</b>	2	White	Steel	25 000	25.0	2700	3 380	4000	≥80	110	IP20
LED Power Batten 1200 mm 50 W 3000 K	4099854 <b>536946</b>	2	White	Steel	25 000	50.0	4845	6 000	3 000	≥80	110	IP20
LED Power Batten 1200 mm 50 W 4000 K	4099854 <b>536960</b>	2	White	Steel	25 000	50.0	5100	6 2 6 0	4000	≥80	110	IP20

Product name		X No.	MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]	<b>a</b>
LED Power Batten 600 mm 12 W 3000 K	12500	-	Not replaceable	Push fit terminal	Mounting equipment	600	41	48	-	8
LED Power Batten 600 mm 12 W 4000 K	12500	-	Not replaceable	Push fit terminal	Mounting equipment	600	41	48	-	8
LED Power Batten 600 mm 24 W 3000 K	12500	-	Not replaceable	Push fit terminal	Mounting equipment	600	82	48	-	8
LED Power Batten 600 mm 24 W 4000 K	12500	-	Not replaceable	Push fit terminal	Mounting equipment	600	82	48	-	8
LED Power Batten 1200 mm 24 W 3000 K	12500	-	Not replaceable	Push fit terminal	Mounting equipment	1 200	41	48	-	8
LED Power Batten 1200 mm 24 W 4000 K	12500	-	Not replaceable	Push fit terminal	Mounting equipment	1 200	41	48	-	8
LED Power Batten 1200 mm 50 W 3000 K	12500	-	Not replaceable	Push fit terminal	Mounting equipment	1 200	82	48	-	8
LED Power Batten 1200 mm 50 W 4000 K	12500	-	Not replaceable	Push fit terminal	Mounting equipment	1 200	82	48	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





# Product sizes (in mm)



873

1 173














Product name	GTIN (EAN)	Q ■ No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	<b>lm</b> 3	lm ught source	K	CRI		P
LED Switch Batten 300 mm 4 W 3000 K	4099854 <b>532535</b>	1	White	Plastic (PC)	30 000	4.0	450	500	3 000	≥80	155	IP20
LED Switch Batten 300 mm 4 W 4000 K	4099854 <b>532597</b>	1	White	Plastic (PC)	30 000	4.0	450	500	4000	≥80	155	IP20
LED Switch Batten 600 mm 8 W 3000 K	4099854 <b>532634</b>	1	White	Plastic (PC)	30 000	8.0	900	950	3 000	≥80	155	IP20
LED Switch Batten 600 mm 8 W 4000 K	4099854 <b>532658</b>	1	White	Plastic (PC)	30 000	8.0	900	950	4000	≥80	155	IP20
LED Switch Batten 900 mm 10 W 3000 K	4099854 <b>532672</b>	1	White	Plastic (PC)	30 000	10.0	1100	1 300	3 000	≥80	155	IP20
LED Switch Batten 900 mm 10 W 4000 K	4099854 <b>532696</b>	1	White	Plastic (PC)	30 000	10.0	1100	1 300	4000	≥80	155	IP20
LED Switch Batten 1200 mm 14 W 3000 K	4099854 <b>532757</b>	1	White	Plastic (PC)	30 000	14.0	1 600	1 800	3 000	≥80	155	IP20
LED Switch Batten 1200 mm 14 W 4000 K	4099854 <b>532795</b>	1	White	Plastic (PC)	30,000	14.0	1 600	1 800	4 000	>80	155	IP20

Product name		X P	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUSED	[mm]	(mm)	(h	Ø d [mm]	
LED Switch Batten 300 mm 4 W 3000 K	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	313	22	30	-	8
LED Switch Batten 300 mm 4 W 4000 K	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	313	22	30	-	8
LED Switch Batten 600 mm 8 W 3000 K	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	573	22	30	-	8
LED Switch Batten 600 mm 8 W 4000 K	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	573	22	30	-	8
LED Switch Batten 900 mm 10 W 3000 K	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	873	22	30	-	8
LED Switch Batten 900 mm 10 W 4000 K	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	873	22	30	-	8
LED Switch Batten 1200 mm 14 W 3000 K	100 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	1 173	22	30	-	8
LED Switch Batten 1200 mm 14 W 4000 K	100 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Power supply, Connector cable	1 173	22	30	_	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im LIGHT SOURCE	K	CRI		IP
							,					
TubeKIT LED 600mm 8.9W 3000K	4099854 <b>538667</b>	1	White	Plastic (PC)	30 000	8.9	900	1 050	3 000	> 80	160	IP20
TubeKIT LED 600mm 8.9W 4000K	4099854 <b>538681</b>	1	White	Plastic (PC)	30 000	8.9	900	1100	4000	> 80	160	IP20
TubeKIT LED 1200mm 19W 3000K	4099854 <b>538704</b>	1	White	Plastic (PC)	30 000	19.0	1 900	2200	3 000	> 80	150	IP20
TubeKIT LED 1200mm 19W 4000K	4099854 <b>538728</b>	1	White	Plastic (PC)	30 000	19.0	2090	2400	4000	> 80	150	IP20
TubeKIT LED 1500mm 21.5W 3000K	4099854 <b>538742</b>	1	White	Plastic (PC)	30 000	21.5	2150	2500	3 000	> 80	150	IP20
TubeKIT LED 1500mm 21 5W 4000K	4000854 <b>529766</b>	1	White	Plactic (PC)	30,000	21.5	2 265	2,600	4,000	> 80	150	IDOU

Product name		X NCL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	(h)	Ø d [mm]	<b>3</b>
TubeKIT LED 600mm 8.9W 3000K	15 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Brackets, Hook	600	35	37	-	8
TubeKIT LED 600mm 8.9W 4000K	15 000	-	Not replaceable	Plug type C (EU)	Mounting equipment, Brackets, Hook	600	35	37	-	8
TubeKIT LED 1200mm 19W 3000K	15 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Brackets, Hook	1 200	35	37	-	8
TubeKIT LED 1200mm 19W 4000K	15 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Brackets, Hook	1 200	35	37	_	8
TubeKIT LED 1500mm 21.5W 3000K	15 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Brackets, Hook	1 500	35	37	-	8
TubeKIT LED 1500mm 21.5W 4000K	15 000	_	Not replaceable	Plug type C (EU)	Mounting equipment, Brackets, Hook	1 500	35	37	-	8

<sup>\* 4099854538667; 4099854538704; 4099854538742 | \*\* 4099854538681; 4099854538728; 4099854538766</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Illuminate your moisture-prone areas with our innovative DAMP-PROOF LUMINAIRES designed for reliable performance and durability. Ideal for cellars, garages, and other challenging environments, these luminaires provide bright, consistent light where it's needed most.
































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> <sub>M</sub> <sup>2</sup>	W	оптрит 3	Im ught source	K	CRI		IP
Submarine Sensor 60cm 8W 4000K	4099854 <b>429057</b>	1	Gray	Plastic	30 000	8.0	650	800	4000	≥80	140	IP65
Submarine Sensor 120cm 16W 4000K	4099854 <b>429095</b>	1	Gray	Plastic	30 000	16.0	1 600	1 800	4000	≥80	140	IP65
Submarine Sensor 150cm 19W 4000K	4099854 <b>429217</b>	1	Gray	Plastic	30 000	19.0	1 900	2200	4000	≥80	140	IP65

Product name		X O	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUEED	[mm]	W [mm]	Þ	Ø d [mm]	<b>a</b>
Submarine Sensor 60cm 8W 4000K	100 000	1		Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	651	66	75		10
Submarine Sensor 120cm 16W 4000K	100 000	1	-	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	1 261	66	75	-	9
Submarine Sensor 150cm 19W 4000K	100 000	1	-	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	1 561	66	75	-	6

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



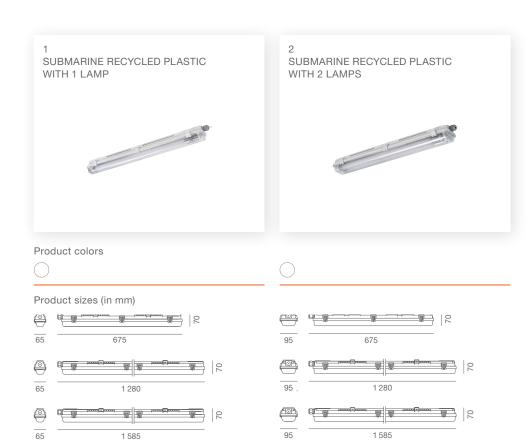

















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	оптрит 3	Im ught source	K	CRI		IP
Submarine Recycled Plastic 60 1 X 7W 840 G13 T8	4099854 <b>462634</b>	1	White	Plastic (PC)	40 000	7.0	800	1 100	4000	> 80	120	IP65
Submarine Recycled Plastic 60 2 X 7W 840 G13 T8	4099854 <b>462658</b>	2	White	Plastic (PC)	40 000	14.0	1 600	2200	4000	> 80	120	IP65
Submarine Recycled Plastic 120 1 X 13.5W 840 G13 T8	4099854 <b>462498</b>	1	White	Plastic (PC)	40 000	13.5	1 550	2100	4000	> 80	120	IP65
Submarine Recycled Plastic 120 2 X 13.5W 840 G13 T8	4099854 <b>462535</b>	2	White	Plastic (PC)	40 000	27.0	3100	4200	4000	> 80	120	IP65
Submarine Recycled Plastic 150 1 X 20W 840 G13 T8	4099854 <b>462573</b>	1	White	Plastic (PC)	40 000	20.0	2300	3100	4000	> 80	120	IP65
Submarine Recycled Plastic 150 2 X 20W 840 G13 T8	4099854 <b>462610</b>	2	White	Plastic (PC)	40 000	40.0	4600	6200	4000	> 80	120	IP65

Product name		X NCL.	LED MODULE WITEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W [mm]	(h)	Ø d [mm]	
Submarine Recycled Plastic 60 1 X 7W 840 G13 T8	100 000	_	-	Terminal, 3-Pole (L, N, PE)	Mounting clips, Mounting screws, Dowels	675	65	70	-	10
Submarine Recycled Plastic 60 2 X 7W 840 G13 T8	100 000	-	-	Terminal, 3-Pole (L, N, PE)	Mounting clips, Mounting screws, Dowels	675	95	70	-	6
Submarine Recycled Plastic 120 1 X 13.5W 840 G13 T8	100 000	-	-	Terminal, 3-Pole (L, N, PE)	Mounting clips, Mounting screws, Dowels	1 280	65	70	-	9
Submarine Recycled Plastic 120 2 X 13.5W 840 G13 T8	100 000	-	-	Terminal, 3-Pole (L, N, PE)	Mounting clips, Mounting screws, Dowels	1 280	95	70	-	6
Submarine Recycled Plastic 150 1 X 20W 840 G13 T8	100 000	_	-	Terminal, 3-Pole (L, N, PE)	Mounting clips, Mounting screws, Dowels	1 585	65	70	-	6
Submarine Recycled Plastic 150 2 X 20W 840 G13 T8	100 000	_	-	Terminal, 3-Pole (L, N, PE)	Mounting clips, Mounting screws, Dowels	1 585	95	70	-	6


<sup>\* 4099854462634; 4099854462498; 4099854462573 | \*\* 4099854462658; 4099854462535; 4099854462610</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
Submarine Through Wiring 120cm 15W 4000K	4099854 <b>429118</b>	1	Gray	Plastic	30 000	15.0	1 600	1 800	4000	≥80	140	IP65
Submarine Through Wiring 150cm 19W 4000K	4099854 <b>429231</b>	1	Gray	Plastic	30 000	19.0	1 900	2200	4000	≥80	140	IP65


Product name		X NCL.	MODULE WITEGRATED	CONNECTOR	ACCIS- SOME BOLING	[mm]	W [mm]	(h	Ø d [mm]	
Submarine Through Wiring 120cm 15W 4000K	100 000	1		Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	1 261	66	75		9
Submarine Through Wiring 150cm 19W 4000K	100 000	1	_	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	1 561	66	75	-	6

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	оптрит 3	Im ught source	K	CRI		IP
Submarine Integrated 0.6M 18W 4000K	4099854 <b>428913</b>	1	Gray	Plastic (PC)	30 000	18.0	1 500	1 900	4000	≥80	120	IP65
Submarine Integrated 1.2M 36W 4000K	4099854 <b>428937</b>	1	Gray	Plastic (PC)	30 000	36.0	3000	3600	4000	≥80	120	IP65
Submarine Integrated 1.5M 48W 4000K	4099854 <b>428951</b>	1	Gray	Plastic (PC)	30 000	48.0	4000	5 000	4000	≥80	120	IP65

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDES	[mm]	W	Þ	Ø d [mm]	<b>a</b>
Submarine Integrated 0.6M 18W 4000K	25 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Mounting equipment	590	86	66	_	8
Submarine Integrated 1.2M 36W 4000K	25 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Mounting equipment	1 180	86	66		8
Submarine Integrated 1.5M 48W 4000K	25 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Mounting equipment	1 480	86	72	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>[h]</sub> <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		P
Submarine Integrated Slim Value 0.6M 10W 4000K	4099854 <b>428975</b>	1	White	Plastic (PC)	30 000	10.0	900	1 200	4000	≥80	120	IP65
Submarine Integrated Slim Value 1.2M 18W 4000K	4099854 <b>428999</b>	1	White	Plastic (PC)	30 000	18.0	1 600	1 900	4000	≥80	120	IP65
Submarine Integrated Slim Value 1.5M 24W 4000K	4099854 <b>429019</b>	1	White	Plastic (PC)	30 000	24.0	2160	3 000	4000	≥80	120	IP65

Product name		NCL E	MODULE NYTAGRATED	CONNECTOR	ACCES- SORIES INCLUSED	[mm]	W	(h	Ø d [mm]	
Submarine Integrated Slim Value 0.6M 10W 4000K	25 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Mounting equipment	720	53	35	_	20
Submarine Integrated Slim Value 1.2M 18W 4000K	25 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Mounting equipment	1 255	53	35	-	20
Submarine Integrated Slim Value 1.5M 24W 4000K	25 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Mounting equipment	1 530	53	35	-	20

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



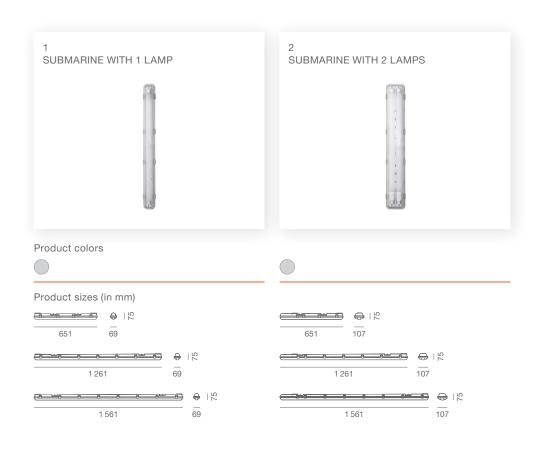


















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im 4	K	CRI		IP
Submarine 1 x 7W 4000K	4099854 <b>429033</b>	1	Gray	Plastic (ABS)	30 000	7.0	700	800	4000	≥80	140	IP65
Submarine 2 x 7W 4000K	4099854 <b>429132</b>	2	Gray	Plastic (ABS)	30 000	14.0	1 300	1 600	4000	≥80	120	IP65
Submarine 1 x 15W 4000K	4099854 <b>429071</b>	1	Gray	Plastic (ABS)	30 000	15.0	1700	1 800	4000	≥80	140	IP65
Submarine 2 x 15W 4000K	4099854 <b>429156</b>	2	Gray	Plastic (ABS)	30 000	30.0	3 000	3 600	4000	≥80	120	IP65
Submarine 1 x 19W 4000K	4099854 <b>429194</b>	1	Gray	Plastic (ABS)	30 000	19.0	2050	2200	4000	≥80	140	IP65
Submarine 2 x 19W 4000K	4099854 <b>429170</b>	2	Gray	Plastic (ABS)	30 000	38.0	3800	4400	4000	≥80	120	IP65

	X Noct.	LED MODULE NTEGRATED	CONSCITOR ACCES- SOURCES		[mm]	W [mm]	(h)	Ø d [mm]	<b>a</b>
100000	_	-	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	651	66	75	-	10
100000	-	-	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	651	105	75	-	6
100 000	_	-	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	1 261	66	75	-	9
100000	_	_	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	1 261	105	75	-	6
100000	_	-	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	1 561	66	75	-	6
100000	_	-	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	1 561	105	75	-	6
	100 000 100 000 100 000 100 000 100 000	100000 - 100000 - 100000 - 100000 - 100000 -	100 000 100 000 100 000 100 000 100 000	100 000 Terminal, 3-Pole (L, N, PE)	100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment	100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1561	100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 66 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 105 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 66 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 105 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1561 66	100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 66 75 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 651 105 75 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 66 75 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1261 105 75 100 000 - Terminal, 3-Pole (L, N, PE) Mounting screws, Plastic dowels, Mounting equipment 1561 66 75	100 000         -         -         Terminal, 3-Pole (L, N, PE)         Mounting screws, Plastic dowels, Mounting equipment         651         66         75         -           100 000         -         -         Terminal, 3-Pole (L, N, PE)         Mounting screws, Plastic dowels, Mounting equipment         651         105         75         -           100 000         -         -         Terminal, 3-Pole (L, N, PE)         Mounting screws, Plastic dowels, Mounting equipment         1261         66         75         -           100 000         -         -         Terminal, 3-Pole (L, N, PE)         Mounting screws, Plastic dowels, Mounting equipment         1261         105         75         -           100 000         -         -         Terminal, 3-Pole (L, N, PE)         Mounting screws, Plastic dowels, Mounting equipment         1561         66         75         -

<sup>\* 4099854429033; 4099854429071; 4099854429194 | \*\* 4099854429132; 4099854429156; 4099854429170</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



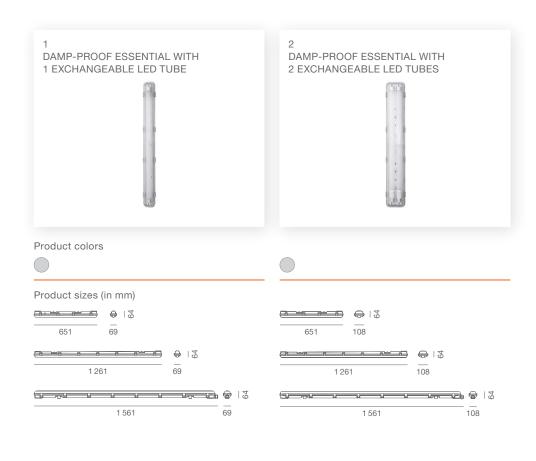














Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
Damp Proof Essential 7W 600mm 4000K	4099854 <b>428876</b>	1	Gray	Plastic	25 000	7.0	640	780	4000	≥80	120	IP65
Damp Proof Essential 2x7W 600mm 4000K	4099854 <b>428890</b>	2	Gray	Plastic	25 000	14.0	1 200	1 560	4000	≥80	120	IP65
Damp Proof Essential 15W 1200mm 4000K	4099854 <b>428838</b>	1	Gray	Plastic	25 000	15.0	1 300	1 650	4000	≥80	120	IP65
Damp Proof Essential 2x15W 1200mm 4000K	4099854 <b>428852</b>	2	Gray	Plastic	25 000	30.0	2400	3 300	4000	≥80	120	IP65
Damp proof Essential 1x19W 1500mm 840	4099854 <b>428791</b>	1	Gray	Plastic (PC)	25 000	19.0	1700	2185	4000	≥80	120	IP65
Damp proof Essential 2x19W 1500mm 840	4099854 <b>428814</b>	2	Gray	Plastic (PC)	25 000	38.0	3 400	4370	4000	≥80	120	IP65

Product name		X Noc.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED		W [mm]	(h	Ø d [mm]	<b>a</b>
Damp Proof Essential 7W 600mm 4000K	12500	-	-	Cable, 3-pole	Mounting screws, Plastic dowels, Mounting equipment	651	69	64	-	8
Damp Proof Essential 2x7W 600mm 4000K	12500	-	-	Cable, 3-pole	Mounting screws, Plastic dowels, Mounting equipment	651	108	64	-	6
Damp Proof Essential 15W 1200mm 4000K	12500	-	-	Cable, 3-pole	Mounting screws, Plastic dowels, Mounting equipment	1 261	69	64	-	8
Damp Proof Essential 2x15W 1200mm 4000K	12500	_	_	Cable, 3-pole	Mounting screws, Plastic dowels, Mounting equipment	1 261	108	64	-	6
Damp proof Essential 1x19W 1500mm 840	12500	-	-	Cable, 2-pole	Mounting screws, Plastic dowels, Mounting clips	1 561	69	64	-	6
Damp proof Essential 2x19W 1500mm 840	12500	_	-	Cable, 2-pole	Mounting screws, Plastic dowels, Mounting clips	1 561	108	64	-	6


<sup>\* 4099854428876; 4099854428838; 4099854428791 | \*\* 4099854428890; 4099854428852; 4099854428814</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

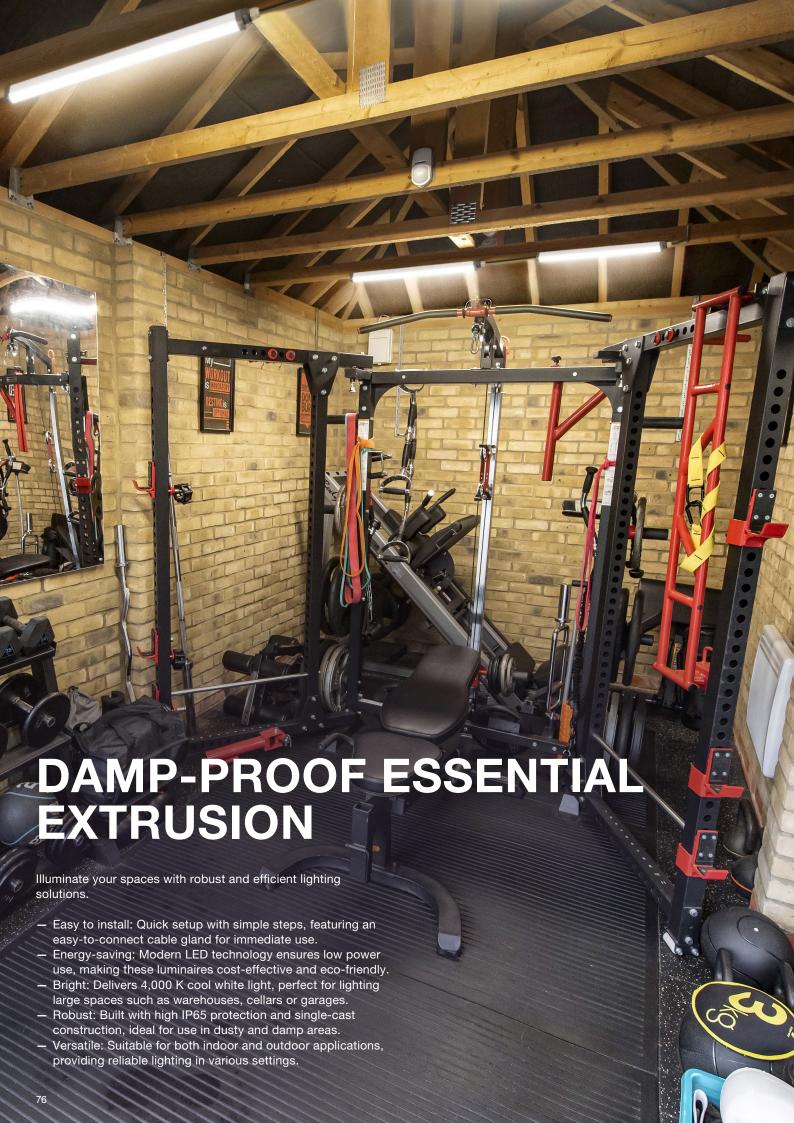



### Product sizes (in mm)



1 540











Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	3 оптрит	lm ught source	K	CRI		P
Damp proof Essential Extrusion 18W 600mm 840	4099854 <b>428777</b>	1	White	Plastic (PC)	30 000	18.0	2160	2250	4000	> 80	140	IP65
Damp proof Essential Extrusion 36W 1200mm 840	4099854 <b>428739</b>	1	White	Plastic (PC)	30 000	36.0	4320	5 000	4000	> 80	140	IP65
Damp proof Essential Extrusion 50W 1500mm 840	4099854 <b>428753</b>	1	White	Plastic (PC)	30 000	50.0	6 000	6800	4000	> 80	140	IP65

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLUCEO	[mm]	W	(L)	Ø d [mm]	
Damp proof Essential Extrusion 18W 600mm 840	15 000	_	Not replaceable	Cable, 2-pole	Mounting screws, Plastic dowels, Mounting clips	640	37	48	_	6
Damp proof Essential Extrusion 36W 1200mm 840	15 000	_	Not replaceable	Cable, 2-pole	Mounting screws, Plastic dowels, Mounting clips	1 240	37	48	-	6
Damp proof Essential Extrusion 50W 1500mm 840	15 000	_	Not replaceable	Cable, 2-pole	Mounting screws, Plastic dowels, Mounting clips	1 540	37	48	-	6

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



### LED BULKHEAD

Durable lighting that combines reliable performance, robust construction, and easy installation for both indoor and sheltered outdoor areas.


- Efficient illumination: 840 lumens of bright, neutral white light at just 11 watts for energy-efficient performance.
- High protection: IP54 rating makes it ideal for damp, dusty, or sheltered outdoor environments.
- Robust: Durable polycarbonate housing rated IK06 for excellent impact resistance and long-term reliability.
- Installation: Compact and lightweight for easy mounting on walls or ceilings in a wide range of locations.
- Reliable operation: Designed for consistent performance with screw terminal connection and a temperature range of -20 to +40 °C.





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	оптрит 3	im 4 ught source	K	CRI		P
LED Bulkhead 6W 4000K Black	4099854 <b>428678</b>	1	Black	Plastic (PC)	30 000	6.0	420	600	4000	≥80	120	IP54
LED Bulkhead 6W 4000K White	4099854 <b>428715</b>	1	White	Plastic (PC)	30 000	6.0	420	600	4000	≥80	120	IP54
LED Bulkhead 11W 4000K Black	4099854 <b>428630</b>	1	Black	Plastic (PC)	30 000	11.0	840	1 200	4000	≥80	120	IP54
LED Bulkhead 11W 4000K White	4099854 <b>428654</b>	1	White	Plastic (PC)	30 000	11.0	840	1 200	4000	≥80	120	IP54

Product name		X PIGL.	LED MODULE SITEGRATED	CONNECTOR	ACCES- SORIES NOLUMB	[mm]	(mm)	(h	Ø d [mm]	
LED Bulkhead 6W 4000K Black	25 000		Not replaceable	Screw terminal	Screws, Plastic dowels	117	70	168		8
LED Bulkhead 6W 4000K White	25 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels	117	70	168	-	8
LED Bulkhead 11W 4000K Black	25 000		Not replaceable	Screw terminal	Screws, Plastic dowels	143	79	216	-	6
LED Bulkhead 11W 4000K White	25 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels	143	79	216	-	6

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	3 оптрит	Im 4	K	CRI		IP
Bulkhead Essential Oval E27 White	4058075 <b>845565</b>	1	White	Polyprophylene (PP)	_			_	_		_	IP54
Bulkhead Essential Oval E27 Black	4058075 <b>845589</b>	1	Black	Polyprophylene (PP)	_	-	_	-	-	-	-	IP54
Bulkhead Essential Round E27 White	4058075 <b>845602</b>	2	White	Polyprophylene (PP)	-	-	-	-	-	-	-	IP54
Bulkhead Essential Round E27 Black	4058075 <b>845626</b>	2	Black	Polyprophylene (PP)	-	-	-	-	-	-	-	IP54

Product name		X P	LED MODULE INTEGRATED	CONNECTION	ACCES- SORIES NCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
Bulkhead Essential Oval E27 White	10 000	_	_	Terminal, 2-Pole (L, N)	_	116	110	207	_	10
Bulkhead Essential Oval E27 Black	10 000	_	-	Terminal, 2-Pole (L, N)		116	110	207	_	10
Bulkhead Essential Round E27 White	10 000	-	-	Terminal, 2-Pole (L, N)	-	190	190	98	-	10
Bulkhead Essential Round E27 Black	10 000	-	-	Terminal, 2-Pole (L, N)	-	190	190	98	-	10

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






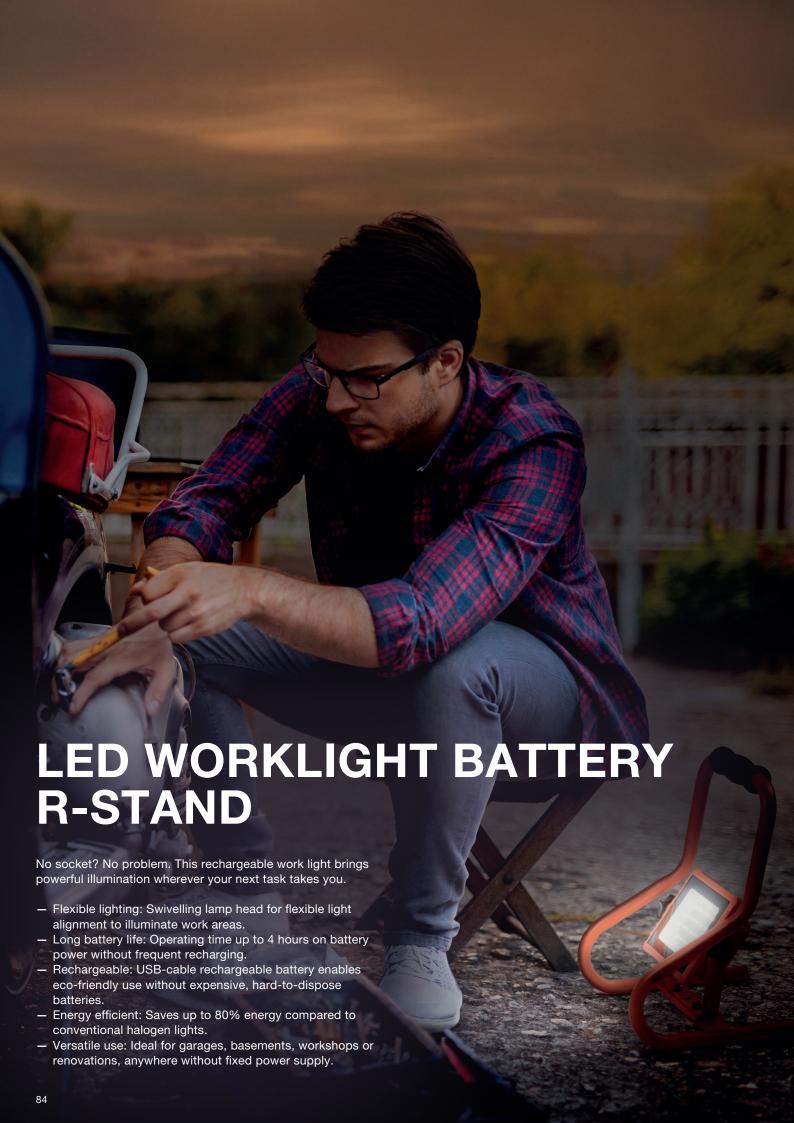





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
LED Worklight Battery R-Stand 20W 4000K	4099854 <b>430312</b>	1	Orange	Aluminum/Plastic	25 000	20.0	1 600	1 800	4000	≥80	120	IP44
LED Worklight Battery R-Stand 30W 4000K	4099854 <b>430336</b>	1	Orange	Aluminum/Plastic	25 000	30.0	2400	3 000	4000	≥80	120	IP44


Product name		X O	LED MODULE NYEGRATED	CONNECTOR	ACCES- SORIES NOLLINGO	[mm]	(mm)	(h	Ø d [mm]	
LED Worklight Battery R-Stand 20W 4000K	15 000		Not replaceable	_	EU Plug	266	200	276		4
LED Worklight Battery R-Stand w30W 4000K	15000	-	Not replaceable	-	EU Plug	311	200	316	-	4

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED		W [mm]	h	Ø d [mm]	
LED WORKLIGHT VALUE BATTERY POCKET 10W 865	7 500	_	Not replaceable	USB	USB-C cable	100	45	100	-	8

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



## WORKLIGHT VALUE BATTERY R-STAND


Lightweight and powerful, the WORKLIGHT VALUE BATTERY R-STAND delivers portable, efficient lighting for every job, wherever you need it.


- Efficient light: Battery-powered worklight with cool white 6,500 K colour temperature for bright and focused illumination.
- Long performance: Integrated USB charging function with power bank functionality ensures independent operation without mains power.
- Versatile: Suitable for DIY, construction, industry, car repairs, garages, basements and outdoor use.
- Portability: Compact, lightweight design allows for effortless transportation and setup.
- IP54 protection: Resistant to dust and splashing water, making it ideal for both indoor and outdoor environments.



Product colors

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
LED WORKLIGHT VALUE BATTERY R-STAND 20W 865	4099854 <b>430510</b>	1	Black/Gray	Aluminum	15 000	20.0	2000	-	6500	≥80	115	IP54
LED WORKLIGHT VALUE BATTERY R-STAND 30W 865	4099854 <b>430534</b>	1	Black/Gray	Aluminum	15 000	30.0	3 0 0 0	-	6500	≥80	115	IP54


Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORES NOUSED	[mm]	W [mm]	(h	Ø d [mm]	
LED WORKLIGHT VALUE BATTERY R-STAND 20W 865	7 500	-	Not replaceable	USB	USB-C cable, Batteries	266	220	276	_	6
LED WORKLIGHT VALUE BATTERY R-STAND 30W 865	7 500	-	Not replaceable	USB	USB-C cable, Batteries	292	219	276	-	4

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	оптрит 3	Im 4	K	CRI		IP
LED WORKLIGHT VALUE BATTERY PANEL 26W 865	4099854 <b>430497</b>	1	Black/Gray	Plastic	15 000	26.0	3 000	_	6 500	≥80	108	IP54


Product name		X Proces	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLLORES	[mm]	(mm)	(h	Ø d [mm]	
LED WORKLIGHT VALUE BATTERY PANEL 26W 865	7500	-	Not replaceable	Plug type C (EU)	Batteries	385	70	315	-	5

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCCUPED	[mm]	(mm)	(h	Ø d [mm]	<b>6</b>
Worklight Essential Battery Panel 10W 865 Black	25 000	_	Not replaceable	USB	USB-C cable	159	43	134	_	10

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Wide-angle brightness for precision tasks – this compact panel light ensures strong, steady illumination where you need it most.

- Flexible lighting: Tiltable panel head enables targeted light direction for a range of workspaces.
- Direct network connection: AC connection ensures stable power supply and uninterrupted lighting during use.
- Work light for indoor: Ideal for interior applications such as painting work with high brightness.
- Energy efficient: Saves up to 80% energy compared to conventional halogen work lights.
- Homogeneous lighting: For uniform illumination with minimized glare, keeping the work environment pleasantly lit.



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	thi <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
LED Worklight Panel 50W 4000K	4099854 <b>430350</b>	1	Orange	Aluminum/Plastic	25 000	50.0	4000	4300	4000	≥80	110	IP20


Product name		X PICL.	LED MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W [mm]	þ	Ø d [mm]	
LED Worklight Panel 50W 4000K	15000	_	Not replaceable	Protective contact Plug type	-	50	201	141	-	4

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M	W	<b>Im</b> output	Im ught source	K	CRI		IP
LED Worklight R-Stand Socket 30W 840	4099854 <b>572111</b>	1	Dark gray	Aluminum/Steel	25 000	30.0	2700	-	4000	≥80	110	IP44
LED Worklight R-Stand Socket 50W 840	4099854 <b>572135</b>	1	Dark gray	Aluminum/Steel	25 000	50.0	4500	-	4000	≥80	110	IP44

Product name		X NCL.	LED MODULE BITEGRATED	CONNECTION	ACCES- SOMES NCLUMED	[mm]	W [mm]	(h	Ø d [mm]	
LED Worklight R-Stand Socket 30W 840	15 000		Not replaceable	Protective contact Plug type		232	224	307		4
LED Worklight R-Stand Socket 50W 840	15 000	_	· ·		_	270	278	375	-	2

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









### Product sizes (in mm)



280

180





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th	W	<b>Im</b> output	Im UGHT SOURCE	K	CRI		IP
LED Worklight S-Stand 20W 840	4099854 <b>572050</b>	1	Dark grav	Aluminum/Steel	25 000	20.0	1 700		4000	≥80	110	IP65
LED Worklight S-Stand 20W 840	4099854 <b>572074</b>	1	Dark gray  Dark gray	Aluminum/Steel	25 000	30.0	2700		4000	≥80	110	IP65
LED Worklight S-Stand 50W 840	4099854 <b>572098</b>	1	Dark gray	Aluminum/Steel	25 000	50.0	4500	_	4000	≥80	110	IP65

Product name		X P	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES INCLUSED	[mm]	W [mm]	(h)	Ø d [mm]	
LED Worklight S-Stand 20W 840	100 000		Not replaceable	Protective contact Plug type	Screws, Allen wrench, Holder	180	160	280	_	10
LED Worklight S-Stand 30W 840	100 000		Not replaceable	Protective contact Plug type	Screws, Allen wrench, Holder	220	210	325	-	10
LED Worklight S-Stand 50W 840	100 000	-	Not replaceable	Protective contact Plug type	Screws, Allen wrench, Holder	264	267	395	-	10


<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser








#### Product sizes (in mm)



288



----

291




















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t <sub>[h]</sub> <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
LED WORKLIGHT VALUE R-STAND 10W 865	4099854 <b>430374</b>	1	Black/Gray	Aluminum	30 000	10.0	1 000	1 200	6 500	≥80	110	IP65
LED WORKLIGHT VALUE R-STAND 20W 865	4099854 <b>430398</b>	1	Black/Gray	Aluminum	30 000	20.0	2000	2500	6 500	≥80	115	IP54
LED WORKLIGHT VALUE R-STAND 30W 865	4099854 <b>430411</b>	1	Black/Gray	Aluminum	30 000	30.0	3 000	3 500	6 500	≥80	115	IP54
LED WORKLIGHT VALUE R-STAND 50W 865	4099854 <b>430473</b>	1	Black/Gray	Aluminum	30 000	50.0	5 400	6 000	6 500	≥80	110	IP65

Product name		X P	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDES	(mm)	W [mm]	Þ	Ø d [mm]	
LED WORKLIGHT VALUE R-STAND 10W 865	15 000	_	Not replaceable	Plug type F	_	180	139	194	_	8
LED WORKLIGHT VALUE R-STAND 20W 865	15 000	-	Not replaceable	Plug type F	-	238	149	254	-	8
LED WORKLIGHT VALUE R-STAND 30W 865	15 000	-	Not replaceable	Plug type F	-	288	169	277	-	6
LED WORKLIGHT VALUE R-STAND 50W 865	15 000	-	Not replaceable	Plug type F	-	291	174	280	-	6


<sup>\* 4099854430374; 4099854430473 | \*\* 4099854430398; 4099854430411</sup> 

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

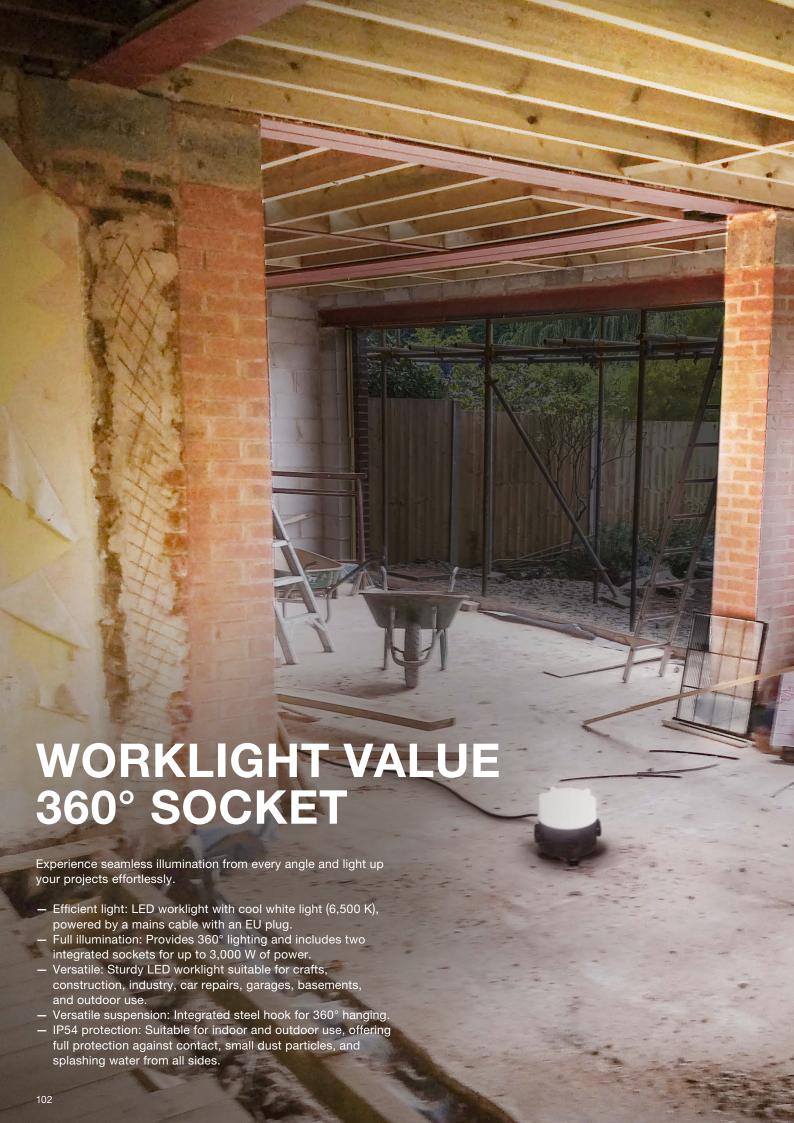

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> M <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		P
LED WORKLIGHT VALUE 360° WITH SOCKET 30W 865	4099854 <b>430435</b>	1	Black/Gray	Plastic	30 000	30.0	3700	4 400	6 5 0 0	≥80	360	IP54

Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SONES INCLUDE	[mm]	W	(h	Ø d [mm]	
LED WORKLIGHT VALUE 360° WITH SOCKET 30W 865	15000	-	Not replaceable	Plug type F	_	222	227	220	-	4


<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

# WORKLIGHT VALUE **FLEX** Working smart with the two individually adjustable heads of the VALUE FLEX, providing customised lighting for any situation. Efficient light: LED worklight with cool white light (6,500 K), powered by a cable with an EU plug. - Varied: LED worklight with 270° vertical and 180° horizontal rotatable heads. The two heads can be switched independently of each other and offer individually adjustable light. Versatile: Robust LED worklight with multiple areas of application such as crafts, construction, industry, car repairs, garages, basements and outdoors. - Easy portability: Handy and versatile worklight that can be easily transported through its compact lightweight design. IP65 protection: Designed for damp indoor locations such as cellars, garages, warehouses and boiler rooms, offering dust and water resistance. 104



Product colors
























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		IP
LED WORKLIGHT VALUE FLEX 2x30W 865	4099854 <b>430572</b>	1	Black/Gray	Aluminum	30 000	60.0	6 450	6 600	6 500	≥80	110	IP65

Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORES	[mm]	(mm)	(h)	Ø d [mm]	
LED WORKLIGHT VALUE FLEX 2x30W 865	15 000	_	Not replaceable	Plug type F		427	194	304	-	4

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	<b>lm</b> 3	Im ught source	K	CRI		P
LED Worklight Value High Power 60W 865 2x Socket	4099854 <b>429972</b>	1	Black	Aluminum	30 000	60.0	7 2 0 0	8 200	6500	≥80	100	IP54
LED Worklight Value High Power 100W 865 2x Socket	4099854 <b>429934</b>	2	Black	Aluminum	30 000	100.0	12000	14000	6500	≥80	100	IP54

Product name		X P	LED MODULE NTEGRATIO	CONNECTOR	ACCES- SONES INCOMES	[mm]	(mm)	(h	Ø d [mm]	
LED Worklight Value High Power 60W 865 2x Socket	15 000		Not replaceable	Plug type F		300	82	311		
LED Worklight Value High Power 100W 865 2x Socket	15000	_	Not replaceable	Plug type F		342	92	368		2

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colors



#### Product sizes (in mm)


















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	<b>t</b> [h] <sup>2</sup>	W	оштрит 3	Im ught source	K	CRI		IP
LED Worklight Value Tripod Battery 1x20W 865	4099854 <b>429996</b>	1	Black	Aluminum	15 000	20.0	2000	-	6 500	≥80	115	IP54

Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLLINE	[mm]	W [mm]	ţ <u>h</u>	Ø d [mm]	
LED Worklight Value Tripod Battery 1x20W 865	7500		Not replaceable	USB	USB-C cable, Mounting equipment	1 070	920	1 550	_	2
LED Workingth value Impourbattery 1x20W 605	7 300		NUL TEPIACEADIE	USD	USB-G cable, Mounting equipment	1070	920	1 330		

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



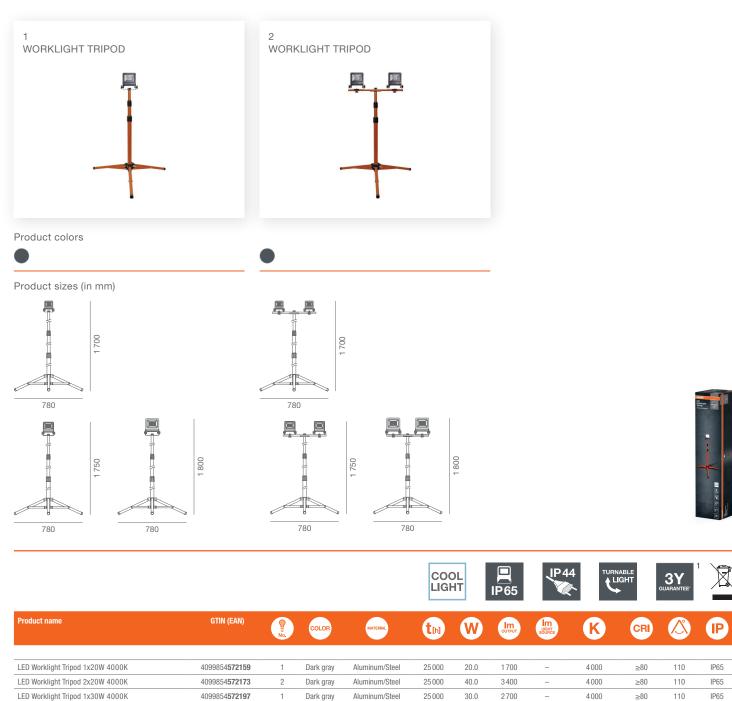

	No.	COLOR	MATERIAL	UN	W	OUTPUT	LIGHT	K	CRI		IP
4099854 <b>572159</b>	1	Dark gray	Aluminum/Steel	25 000	20.0	1700	-	4000	≥80	110	IP65
4099854 <b>572173</b>	2	Dark gray	Aluminum/Steel	25 000	40.0	3 400	-	4000	≥80	110	IP65
4099854 <b>572197</b>	1	Dark gray	Aluminum/Steel	25 000	30.0	2700	-	4000	≥80	110	IP65
4099854 <b>572210</b>	2	Dark gray	Aluminum/Steel	25 000	60.0	5 400	-	4000	≥80	110	IP65
4099854 <b>572234</b>	1	Dark gray	Aluminum/Steel	25 000	50.0	4500	-	4000	≥80	110	IP65
4099854 <b>572258</b>	2	Dark gray	Aluminum/Steel	25 000	100.0	9 000	_	4000	≥80	110	IP65
	4099854 <b>572173</b> 4099854 <b>572197</b> 4099854 <b>572210</b> 4099854 <b>572234</b>	4099854 <b>572159</b> 1 4099854 <b>572173</b> 2 4099854 <b>572197</b> 1 4099854 <b>572210</b> 2 4099854 <b>572234</b> 1	4099854 <b>572159</b> 1 Dark gray 4099854 <b>572173</b> 2 Dark gray 4099854 <b>572197</b> 1 Dark gray 4099854 <b>572210</b> 2 Dark gray 4099854 <b>572234</b> 1 Dark gray	4099854572159 1 Dark gray Aluminum/Steel 4099854572173 2 Dark gray Aluminum/Steel 4099854572197 1 Dark gray Aluminum/Steel 4099854572210 2 Dark gray Aluminum/Steel 4099854572234 1 Dark gray Aluminum/Steel	4099854 <b>572159</b> 1 Dark gray Aluminum/Steel 25 000 4099854 <b>572173</b> 2 Dark gray Aluminum/Steel 25 000 4099854 <b>572197</b> 1 Dark gray Aluminum/Steel 25 000 4099854 <b>572210</b> 2 Dark gray Aluminum/Steel 25 000 4099854 <b>572234</b> 1 Dark gray Aluminum/Steel 25 000	4099854 <b>572159</b> 1 Dark gray Aluminum/Steel 25 000 20.0 4099854 <b>572173</b> 2 Dark gray Aluminum/Steel 25 000 40.0 4099854 <b>572197</b> 1 Dark gray Aluminum/Steel 25 000 30.0 4099854 <b>572210</b> 2 Dark gray Aluminum/Steel 25 000 60.0 4099854 <b>572234</b> 1 Dark gray Aluminum/Steel 25 000 50.0	4099854572159 1 Dark gray Aluminum/Steel 25 000 20.0 1700 4099854572173 2 Dark gray Aluminum/Steel 25 000 40.0 3400 4099854572197 1 Dark gray Aluminum/Steel 25 000 30.0 2700 4099854572210 2 Dark gray Aluminum/Steel 25 000 60.0 5400 4099854572234 1 Dark gray Aluminum/Steel 25 000 50.0 4500	4099854 <b>572159</b> 1 Dark gray Aluminum/Steel 25 000 20.0 1700 – 4099854 <b>572173</b> 2 Dark gray Aluminum/Steel 25 000 40.0 3400 – 4099854 <b>572197</b> 1 Dark gray Aluminum/Steel 25 000 30.0 2 700 – 4099854 <b>572210</b> 2 Dark gray Aluminum/Steel 25 000 60.0 5400 – 4099854 <b>572234</b> 1 Dark gray Aluminum/Steel 25 000 50.0 4500 –	4099854572159	4099854572159 1 Dark gray Aluminum/Steel 25 000 20.0 1700 - 4000 ≥80 4099854572173 2 Dark gray Aluminum/Steel 25 000 40.0 3400 - 4000 ≥80 4099854572197 1 Dark gray Aluminum/Steel 25 000 30.0 2700 - 4000 ≥80 4099854572210 2 Dark gray Aluminum/Steel 25 000 60.0 5400 - 4000 ≥80 4099854572234 1 Dark gray Aluminum/Steel 25 000 50.0 4500 - 4000 ≥80	4099854572159 1 Dark gray Aluminum/Steel 25000 20.0 1700 - 4000 ≥80 110 4099854572173 2 Dark gray Aluminum/Steel 25000 40.0 3400 - 4000 ≥80 110 4099854572197 1 Dark gray Aluminum/Steel 25000 30.0 2700 - 4000 ≥80 110 4099854572210 2 Dark gray Aluminum/Steel 25000 60.0 5400 - 4000 ≥80 110 4099854572234 1 Dark gray Aluminum/Steel 25000 50.0 4500 - 4000 ≥80 110

	X PICL.	MODULE NTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W [mm]	(h	Ø d [mm]	<b>3</b>
		_	<u>-</u>						
100 000	_	Not replaceable	Protective contact Plug type	Screws, Stand	780	680	1 700	-	4
100 000	_	Not replaceable	Protective contact Plug type	Screws, Stand	780	680	1 700	_	4
100 000	_	Not replaceable	Protective contact Plug type	Screws, Stand	780	680	1 750	-	4
100 000	_	Not replaceable	Protective contact Plug type	Screws, Stand	780	680	1 750	-	4
100 000	_	Not replaceable	Protective contact Plug type	Screws, Stand	780	680	1 800	-	4
100 000	_	Not replaceable	Protective contact Plug type	Screws, Stand	780	680	1 800	-	4
	100 000 100 000 100 000 100 000 100 000	100 000 - 100 000 - 100 000 - 100 000 - 100 000 -	100 000         -         Not replaceable           100 000         -         Not replaceable	100 000 - Not replaceable Protective contact Plug type 100 000 - Not replaceable Protective contact Plug type 100 000 - Not replaceable Protective contact Plug type 100 000 - Not replaceable Protective contact Plug type 100 000 - Not replaceable Protective contact Plug type 100 000 - Not replaceable Protective contact Plug type	100 000 - Not replaceable Protective contact Plug type Screws, Stand 100 000 - Not replaceable Protective contact Plug type Screws, Stand 100 000 - Not replaceable Protective contact Plug type Screws, Stand 100 000 - Not replaceable Protective contact Plug type Screws, Stand 100 000 - Not replaceable Protective contact Plug type Screws, Stand 100 000 - Not replaceable Protective contact Plug type Screws, Stand	100 000     -     Not replaceable     Protective contact Plug type     Screws, Stand     780       100 000     -     Not replaceable     Protective contact Plug type     Screws, Stand     780       100 000     -     Not replaceable     Protective contact Plug type     Screws, Stand     780       100 000     -     Not replaceable     Protective contact Plug type     Screws, Stand     780       100 000     -     Not replaceable     Protective contact Plug type     Screws, Stand     780	100 000 - Not replaceable Protective contact Plug type Screws, Stand 780 680 100 000 - Not replaceable Protective contact Plug type Screws, Stand 780 680 100 000 - Not replaceable Protective contact Plug type Screws, Stand 780 680 100 000 - Not replaceable Protective contact Plug type Screws, Stand 780 680 100 000 - Not replaceable Protective contact Plug type Screws, Stand 780 680 100 000 - Not replaceable Protective contact Plug type Screws, Stand 780 680	100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1700           100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1700           100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1750           100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1750           100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1800	100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1700         -           100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1700         -           100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1750         -           100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1750         -           100 000         -         Not replaceable         Protective contact Plug type         Screws, Stand         780         680         1800         -

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


# **HIGHBAY LUMINAIRES**

OSRAM HIGHBAY solutions offer advanced illumination technology that transforms commercial and industrial spaces, delivering exceptional brightness and outstanding energy efficiency. These expertly engineered fixtures provide superior daylight-quality performance in warehouses, industrial halls and retail environments, ensuring optimal visibility in challenging areas with high ceilings.

The innovative HIGHBAY BLADE series combines an aerodynamic design with intelligent light distribution to significantly reduce energy consumption, offering fully customisable configurations for demanding large-scale environments. Built for professional durability and designed to excel in commercial applications, they deliver reliable, long-lasting performance that enhances productivity. Elevate your space, accelerate your success.





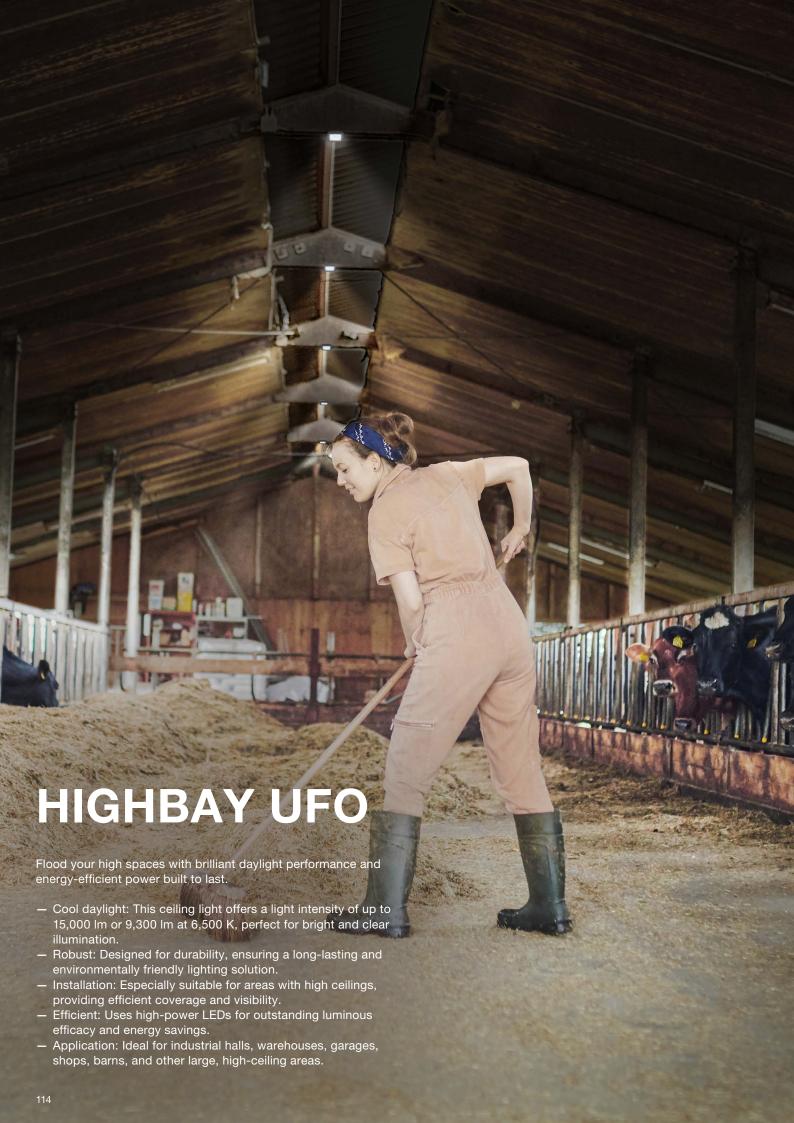




Product colors



#### Product sizes (in mm)



230.4















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th	W	im очтрит	Im UGHT SOURCE	K	CRI		IP
Highbay Ufo 80W 865 IP65 Black	4099854 <b>429354</b>	1	Black	Aluminum	20 000	80.0	9300	-	6500	> 70	110	IP65
Highbay Ufo 130W 865 IP65 Black	4099854 <b>429330</b>	1	Black	Aluminum	20 000	130.0	1 5000	-	6500	> 70	110	IP65

Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUSED	[mm]	(mm)	(h	Ø d [mm]	
Highbay Ufo 80W 865 IP65 Black	25 000		Not replaceable	Cable, 3-pole		230.4	230.4	80		4
Highbay Ufo 130W 865 IP65 Black	25 000	-	Not replaceable	Cable, 3-pole	-	273	273	83	_	4

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser










Product colors

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	tin	W	lm очтрит	Im UGHT SOURCE	K	CRI		P
Highbay Blade E27 17W 840 E27 Black	4099854 <b>429255</b>	1	Black	Plastic	25 000	17.0	1700		4000	≥ 82	100	
Highbay Blade E27 23W 840 E27 Black	4099854 <b>429279</b>	2	Black	Plastic	25 000	23.0	2350	-	4000	≥ 82	100	-
Highbay Blade E27 40W 840 E27 Black	4099854 <b>429293</b>	3	Black	Aluminum	20 000	40.0	4300	-	4000	≥ 80	100	_
Highbay Blade E27 60W 840 E27 Black	4099854 <b>429316</b>	3	Black	Aluminum	20 000	60.0	6500	-	4000	≥ 80	100	_


Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES RELUCED	[mm]	W [mm]	jh   	Ø d [mm]	
Highbay Blade E27 17W 840 E27 Black	10 000	_	Not replaceable	E27 Socket	-	231	231	91	231	4
Highbay Blade E27 23W 840 E27 Black	10 000	_	Not replaceable	E27 Socket	-	231	231	91	231	4
Highbay Blade E27 40W 840 E27 Black	10 000	_	Not replaceable	E27 Socket	-	337.5	337.5	109	337.5	6
Highbay Blade E27 60W 840 E27 Black	10 000	_	Not replaceable	E27 Socket	-	337.5	337.5	109	337.5	6

<sup>1</sup> The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



## LET THERE BE LIGHT WHEREVER IT'S NEEDED! LIGHT THAT SELLS ITSELF

With ready-made packages, you can offer your customers a wide range of practical functional lighting solutions. These clever combinations will make your products stand out from the crowd and look great! This is an exciting opportunity to offer your customers something inspiring and useful at the same time.

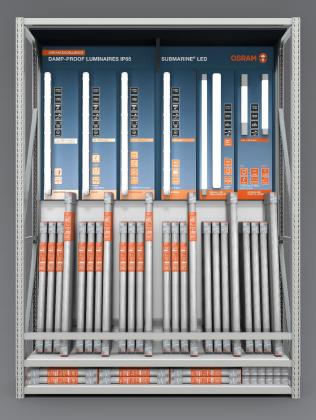

#### ATTRACTIVE SHELF DESIGN

A shelf full of ready-made incentives. See a variety of well-engineered and customised functional lighting packages.

Our shelves are eye-catching and perfectly designed to meet the needs of the target audience. Product-specific benefits



and features are explained and functional product samples are displayed to make the products intuitively understandable for your customers.










#### **COMPACT DISPLAYS**

Discover our OSRAM POS display range – featuring a fresh new look, updated colors, and modern design elements that bring your products to life. Our high-quality wooden displays are fully customizable with in-house printing and expertly built to create impressive retail presentations. We also offer a comprehensive selection of cardboard displays – shelves, trays, hooks, and dumpbins to suit every retail environment.

Available in convenient sizes from 1/8 to full pallet (1/1), all displays are delivered fully assembled and ready to use immediately. To enhance customer engagement and significantly increase in-store visibility, displays can be ordered with working electrified samples that showcase your products in action. Both design and production are handled entirely in-house, enabling efficient delivery timelines and maintaining our high quality standards.

## **SYMBOLS IN THE TABLES**

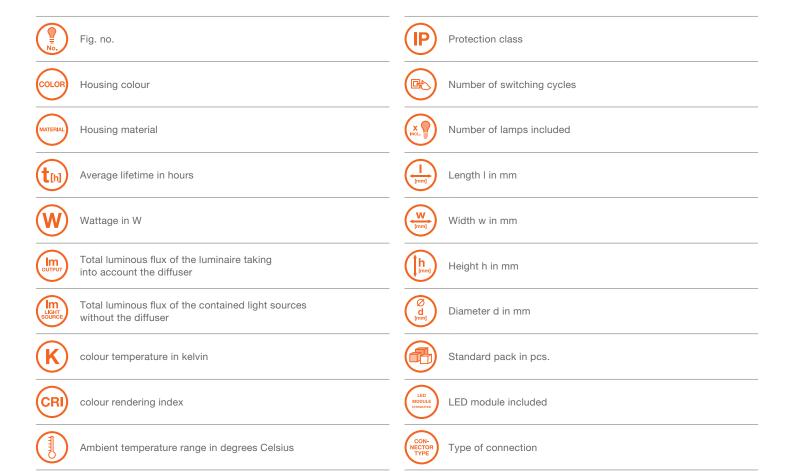


## PRODUCT-SPECIFIC SYMBOLS

Beam angle in degrees °



## **PRODUCT-SPECIFIC SYMBOLS**

Motion sensor

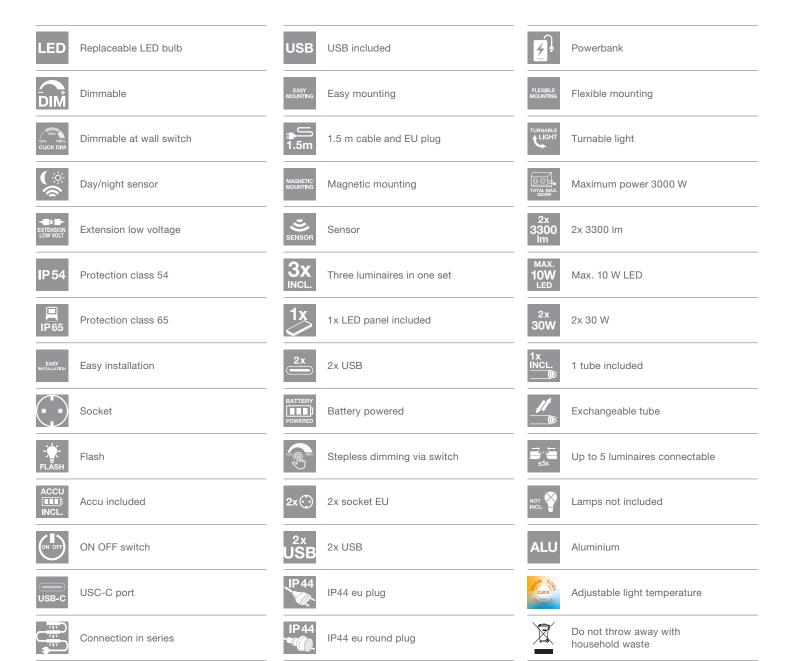

121





#### **ABOUT LEDVANCE**

With business activities in over 140 countries, LEDVANCE is one of the world's leading companies in the field of general lighting. Originating from the general lighting division of OSRAM GmbH, LEDVANCE 's portfolio includes LED lamps and luminaires, intelligent lighting products, traditional lamps and renewable energy solutions. #POWERTHROUGHLIGHT

LEDVANCE GmbH Parkring 1-5 85748 Garching Germany www.ledvance.com

Customer Service Centre: kundenservice.retail@ledvance.com Germany: Phone: +49 89 780673-660 Austria: Phone: +43 1 68068

LEDVANCE is a licensee for the product trademark OSRAM for lamps & luminaire products in general lighting.