



OUR STRENGTHS ARE YOUR ADVANTAGE



COOPERATIVE

As a dedicated and collaborative partner, LEDVANCE boasts a vast, worldwide sales team and over a century of experience, ensuring we stand by your side at all times.



VERSATILE

Modern, smart, decorative, functional, robust and practical – our extensive portfolio meets customer requirements in all categories and virtually every area of application.



SALES-BOOSTING

Attract attention, encourage purchases. We offer targeted support for your sales with creative, pre-tested marketing concepts.



CARING

We are committed to contributing to a greener planet by reducing CO_2 emissions and waste through sustainable products, solutions and processes. We empower our customers to use light more efficiently to save energy and reduce their environmental footprint.



UNIQUE

Fresh, dynamic, high-quality and bold – we know at an early stage what interests customers and where lighting trends are heading. LEDVANCE is unmistakably LEDVANCE.



INNOVATION MEETS TRADITION

We embody progress and the passion to shape the future of lighting actively. By blending our courage to explore new paths with our experience from more than 100 years of lighting expertise, we lead the way forward.



ALL IN ONE


At LEDVANCE, we've got everything you need from a single source – LED luminaires, lamps, and Smart Home products. We offer you a wide range of innovative and market-driven solutions, setting new trends along the way.




FIRST-CHOICE PARTNER

As the perfect strategic ally, we offer an extensive portfolio, a robust sales network, and unparalleled global market access to fulfill all your requirements.

GLOBAL PRESENCE

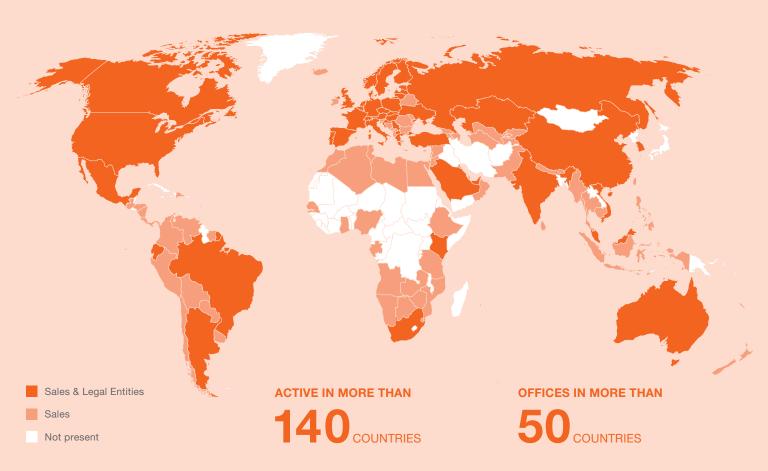

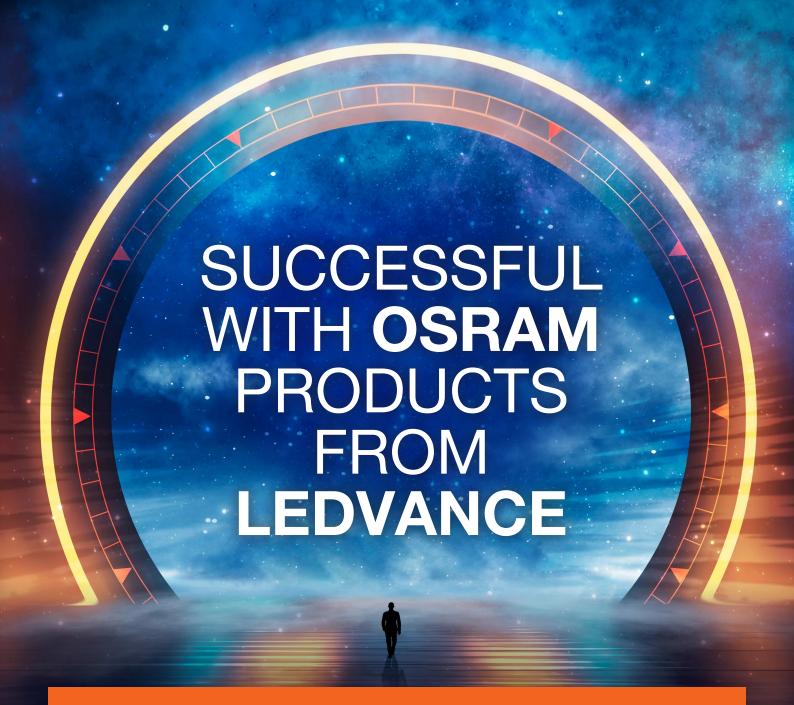

As an exclusive licence partner, LEDVANCE offers all its general lighting solutions in the well-known OSRAM brand, creating even greater potential and generating even higher sales.

MAXIMUM BRAND AWARENESS: LIGHT MEANS OSRAM

OSRAM is the ultimate lighting expert, setting standards in lighting technology around the world for well over 100 years and epitomising quality, efficiency and progressive ideas.

INNOVATION AND TRADITION: THE CORNERSTONE OF YOUR SUCCESS

The licencing partnership with OSRAM allows LEDVANCE to offer you the best of both worlds – a well-known brand, innovative, sustainable products and a reliable partnership.

MANY PRODUCTS, ONE SUPPLIER: MORE THAN 1,500 NEW OSRAM-BRANDED PRODUCTS

LEDVANCE offers a huge selection of OSRAM-branded luminaires, lamps and smart solutions – anything from decorative luminaires and work lights to outdoor lighting. And everything from a single source.

OSRAM-BRANDED LIGHTING SOLUTIONS. A STRONG BRAND THAT IS THE KEY TO YOUR SUCCESS.

BROUGHT TO LIGHT: OUR NEW PACKAGING

Thanks to clear brand allocation, concise product information and graphic categorisation, customers can instantly find the right OSRAM product - regardless of placement.



OSRAM SEAL AND CATEGORY REFERENCE

so that the brand and application are instantly recognisable even when the product is placed horizontally

APPLICATION ICON

for clear categorisation











► A UNIFORM LOOK FOR **ALL PRODUCTS**

GOOD NEWS: OUR PRODUCT BROCHURES

Of course, we will continue to keep you posted about our product innovations and entire portfolio. You will recognise our new brochures by the OSRAM logo under the LEDVANCE lettering. And of course by their convincing content.







▶ EVERYTHING STAYS BETTER -**INCLUDING OUR COMMUNICATION**

SALES RIGHT DOWN THE LINE: OUR PRODUCT PRESENTATIONS AT THE POS

Our well-thought-out PoS concepts provide an attractive stage for your lighting products and also give you plenty of cross-selling options to help you generate considerable additional sales.









ENORMOUS CROSS-SELLING POTENTIAL

CONTENT

LEDVANCE POWER THROUGH LIGHT	2	ROUND SMART ⁺ LUMINAIRES	46
		– SMART ⁺ WIFI ORBIS® ULTRA SLIM BACKLIGHT	46
PRODUCTS		- SMART ⁺ WIFI MATTER CLARIA	48
CEILING LUMINAIRES	8	– SMART ⁺ WIFI ORBIS® BACKLIGHT ROUND	50
SMART ⁺ PANEL LUMINAIRES	10	- SMART ⁺ WIFI MATTER STEA	52
- SMART ⁺ WIFI MATTER PLANON [™] FRAMELESS SPARKLE	10	- SMART ⁺ WIFI MATTER SPIRAL	54
– SMART ⁺ WIFI MATTER PLANON™		ROUND LUMINAIRES	56
FRAMELESS SQUARE	12	– ORBIS® HELMAN	56
- SMART ⁺ WIFI MATTER PLANON™ FRAMELESS RECTANGULAR	14	- ORBIS® PEDERSON	58
– SMART ⁺ WIFI MATTER PLANON™		– ORBIS® ALISON	60
PLUS SQUARE	16	- ORBIS® WOODBURRY	62
- SMART ⁺ WIFI MATTER PLANON™ PLUS RECTANGULAR	18	- ORBIS® YUMMY	64
PANEL LUMINAIRES	20	– ORBIS® LIVIA	66
– PLANON™ FRAMELESS SQUARE	20	- ORBIS® ALVA	68
– PLANON™ FRAMELESS RECTANGULAR	22	- ORBIS® CONCRETE	70
– PLANON™ FRAMELESS ROUND	24	- ORBIS® PLATE	72
– PLANON™ PLUS SQUARE	26	- ORBIS® SPIRAL WITH CENTRAL LIGHT	74
– PLANON™ PLUS RECTANGULAR	28	- ORBIS® SPIRAL ROUND	76
- PANEL ESSENTIAL VARIO	30	- ORBIS® SPIRAL OVAL	78
- PANEL ESSENTIAL	32	- ORBIS® SPIRAL LAYER ROUND	80
SQUARE SMART ⁺ LUMINAIRES	34	- ORBIS® SLIM MOIA	82
- SMART ⁺ WIFI MATTER MAGNET SQUARE	34	– ORBIS® MADRID	84
- SMART ⁺ WIFI MATTER MAGNET		– ORBIS® PARIS	86
RECTANGULAR	36	- ORBIS® MILAN	88
- SMART ⁺ WIFI ORBIS® BACKLIGHT SQUARE	38	– ORBIS® LONDON	90
- SMART ⁺ WIFI ORBIS® SADDIE	40	– ORBIS® DUBLIN	92
SQUARE LUMINAIRES	42	- ORBIS® BERLIN	94
– ORBIS® ALICIA	42	- ORBIS® ULTRA SLIM BACKLIGHT CLICK DIM	96
– ORBIS® SPIRAL LAYER SQUARE	44	- ONDIG OLI NA GLIIVI DAUNLIGHT GLICK DIIVI	90

- ORBIS® SPARKLE	98
- ORBIS® CCT / DIM	100
– ORBIS® PURE	102
- CEILING ESSENTIAL WITH E27 BASE	104
- CEILING ESSENTIAL WITH INTEGRATED LED MODULE	106
SMART ⁺ CEILING FANS	108
- SMART ⁺ WIFI CEILING FAN LED	108
CEILING FANS	110
- CEILING FAN GRILL	110
- CEILING FAN COMPACT	112
- CEILING FAN RETRACTABLE	114
ROUND SENSOR LUMINAIRES	116
– ORBIS® IP44 SENSOR	116
WALL LUMINAIRES	118
SMART ⁺ WALL LUMINAIRES	120
– SMART ⁺ WIFI ORBIS® WALL SWAN	120
– SMART ⁺ WIFI ORBIS® WALL TWIST	122
– SMART ⁺ WIFI ORBIS® WALL WOOD	124
POS CONCEPTS	126
GLOSSARY	128



With high quality materials and versatile design, our wide range of ceiling luminaires will take the atmosphere in your home to a whole new level. A long lifetime, energy efficiency and excellent style are just some of the many advantages of our products. Whether direct or indirect, our ceiling luminaires perform at their best.

Plus, depending on the luminaire type, they are intelligent too: you can control your ceiling lights via app or voice control from nearby or far away, subtly or colourful but always in exactly the right mood.





SMART⁺ WIFI MATTER PLANON[™] FRAMELESS **SPARKLE** Transform your room into a sparkling night sky. Experience customizable white light, enchanting glitter effects and intelligent control for a truly unique lighting experience. Ideal light: Adjustable white light ranging from 3,000 K to 6,500 K for personalized lighting. The panel light is also dimmable. Wow effect: The panel light has a glitter and evokes the imagery of a starry night sky. Smart control: Easily managed via SMART⁺ WiFi remote, smartphone app, or smart speaker. Compatible with Alexa, Google and others. It can also be operated by a light switch. Long life: The panel light has a long life of up to 30,000 hours, this luminaire emits a brilliantly bright light while being energy-efficient. IP20 protection: Suitable for living rooms and studies, offering finger protection for live components.









Product name	IP		X NCL.	LED MODULE MICCOUTE	CON- NECTOR TYPE	[mm]	(mm)	h [mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Planon FL Spark 45x45 TW	IP20	15 000		Not replaceable	Terminal, 3-Pole (L, N, PE)	450	450	63		4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

SMART⁺ WIFI MATTER PLANON[™] FRAMELESS SQUARE

Smart lighting, reimagined. Frame your world in vibrant colours and customisable white tones, all at your command.

- Technology: WiFi Matter integration for smart control via app or voice command, compatible with Alexa and Google Assistant.
- Colour control: RGB colour choice with approx. 16 million colours and Tuneable White adjustable from 3,000 K to 6,500 K.
- Dimming function: Light intensity easily adjustable via SMART⁺ app for personalised illumination.
- Design: Frameless, sleek LED ceiling light in white, ideal for kitchens, living rooms, offices, and more.
- Light source: LEDs permanently installed, not replaceable, long service life of up to 25,000 hours.











Product name	IP		X PICL.	LED MODULE MITOGRAFED	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Planon FL 30x30 TW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	300	300	62		5
SMART ⁺ Wifi MAT Planon FL 60x60 RGBTW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	600	600	62	_	3

^{* 4099854471896}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









Product name	(P)		X Not.	MODULE MODULE MODULE	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Planon FL 80x10 TW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	800	100	65	-	6
SMART ⁺ Wifi MAT Planon FL 120x10 TW	IP20	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	1 200	100	63	-	6
SMART ⁺ Wifi MAT Planon FL 120x30 TW	IP20	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	1 200	300	62	_	3

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




SMART[†] WIFI MATTER PLANON[™] PLUS SQUARE

Shape your atmosphere with brilliant colour, adjustable white tones, and intuitive smart control in a sleek square form.

- Function: Control adjustable white light (3,000-6,500 K) or RGB colour easily via app or voice assistant.
- Performance: High luminous flux up to 3,200 lm with efficient energy use and natural colour rendering (CRI>80).
- Material: Durable aluminium housing with PMMA cover for a modern look and reliable performance.
- Installation: Pre-assembled mounting bracket with full accessories for quick, easy ceiling installation.
- Smart features: Control light colour, brightness, and scenes with smart home systems like Alexa or Google Assistant.
- Details: Offers 3,200 lumens, IP20 protection, and up to 25,000 hours of service life; perfect for living spaces, kitchens, and work areas.



Product sizes (in mm)





☆ matter

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _M ²	W	оптрит 3	Im 4	K	
SMART ⁺ Wifi MAT Planon Plus 30x30 TW	4099854 471391	1	White	Aluminum	25 000	20	1 500	2 0 5 0	30006500	110
SMART ⁺ Wifi MAT Planon Plus 30x30 RGBW	4099854 471339	1	White	Aluminum	25 000	20	1 400	2300	3 000	110
SMART ⁺ Wifi MAT Planon Plus 45x45 TW	4099854 471575	1	White	Aluminum	25 000	28	2000	2950	30006500	110
SMART ⁺ Wifi MAT Planon Plus 45x45 RGBW	4099854 471537	1	White	Aluminum	25 000	28	2100	3 000	3 000	110
SMART ⁺ Wifi MAT Planon Plus 60x60 TW	4099854 471834	1	White	Aluminum	25 000	36	3 000	3 950	30006500	110
SMART+ Wifi MAT Planon Plus 60x60 RGBW	4099854 471797	1	White	Aluminum	25 000	36	3 200	4000	3 000	110

Product name	IP		X Not.	LED MODULE MODULE	CON- NECTOR TYPE	[mm]	(mm)	th _[mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Planon Plus 30x30 TW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	300	300	56	_	5
SMART ⁺ Wifi MAT Planon Plus 30x30 RGBW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	300	300	56	-	5
SMART ⁺ Wifi MAT Planon Plus 45x45 TW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	450	450	56	-	4
SMART ⁺ Wifi MAT Planon Plus 45x45 RGBW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	450	450	56	-	4
SMART ⁺ Wifi MAT Planon Plus 60x60 TW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	595	595	56	-	3
SMART ⁺ Wifi MAT Planon Plus 60x60 RGBW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	595	595	56	-	3

^{* 4099854471339; 4099854471537; 4099854471797 | ** 4099854471391; 4099854471575; 4099854471834}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

SMART⁺ WIFI MATTER PLANON[™] PLUS RECTANGULAR Expand your creativity with vibrant colours and dynamic white tones, all effortlessly controlled with smart technology. Control: Adjustable white light (3,000-6,500 K) or RGB colour change, operated via SMART⁺ app or voice assistant. Performance: High luminous flux up to 3,000 lm with a wide 110° beam angle for even illumination. Installation: Easy ceiling mounting with pre-assembled bracket and complete mounting accessories included. Functions: Dimming, colour selection, and smart automation are fully customisable through connected smart home sys-- Details: Robust aluminium housing with PMMA cover, IP20 protection, and up to 25,000 hours lifespan for indoor use. 18



Product sizes (in mm)



595





☆ matter

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im output 3	LIGHT SOURCE 4	K	
SMART ⁺ Wifi MAT Planon Plus 60x30 TW	4099854 471650	1	White	Aluminum	25 000	22	1 600	2300	30006500	110
SMART ⁺ Wifi MAT Planon Plus 60x30 RGBW	4099854 471599	1	White	Aluminum	25 000	28	2000	3 000	3 000	110
SMART ⁺ Wifi MAT Planon Plus 120x30 TW	4099854 471254	1	White	Aluminum	25 000	36	2700	4000	30006500	110
SMART ⁺ Wifi MAT Planon Plus 120x30 RGBW	4099854 471216	1	White	Aluminum	25 000	36	3 000	4100	3 000	110

Product name	IP		X PICL.	LED MODULE MISSOURE	CON- NECTOR TYPE	[mm]	(b)	h [mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Planon Plus 60x30 TW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	595	300	56	_	3
SMART ⁺ Wifi MAT Planon Plus 60x30 RGBW	IP20	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	595	300	56	-	3
SMART ⁺ Wifi MAT Planon Plus 120x30 TW	IP20	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	1 200	300	56	-	3
SMART ⁺ Wifi MAT Planon Plus 120x30 RGBW	IP20	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	1 200	300	56	_	3


^{* 4099854471599; 4099854471216 | ** 4099854471650; 4099854471254}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	thi 2	W	lm 3	Im LIGHT SOURCE	K	CRI		P
Planon Frameless 300x300mm 20W 830 White	4099854 452512	1	White	Aluminum	25 000	19.0	1 600	-	3 000	> 80	120	IP20
Planon Frameless 600x600mm 40W 830 White	4099854 452451	1	White	Aluminum	25 000	40.0	3 300	-	3 000	> 80	120	IP20


Product name		X D	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLLOGO	[mm]	W [mm]	h [mm]	Ø d [mm]	
Planon Frameless 300x300mm 20W 830 White	-		Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	295	295	60	_	4
Planon Frameless 600x600mm 40W 830 White	_	_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	595	595	60	-	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

PLANON™ FRAMELESS RECTANGULAR

Elegance in every line. This slim LED panel blends subtle design with warm, welcoming light for your home or office.

- Decorative design: Slim, elegant LED panel providing aesthetic lighting and a pleasant atmosphere.
- Sustainable: Modern LED technology ensures energy efficiency and environmental friendliness.
- Pleasant lighting: Warm white light (3,000 K) creates a soft, cozy ambience for any room.
- Easy installation: Quick setup with all required mounting and connection accessories included.
- Versatile: Ideal for flexible wall or ceiling mounting in living rooms, offices, and more.

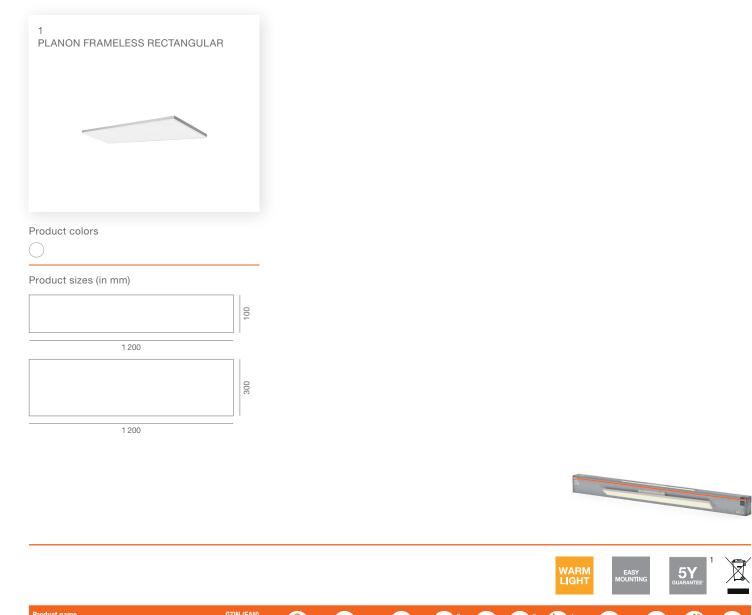

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _M ²	W	оптрит 3	LIGHT SOURCE 4	K	CRI		IP
Planon Frameless 1200x100mm 30W 830 White	4099854 452598	1	White	Aluminum	25 000	35.0	2500		3 000	> 80	120	IP20
Planon Frameless 1200x300mm 40W 830 White	4099854 452390	1	White	Aluminum	25 000	40.0	3 300	-	3 000	> 80	120	IP20

Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUSED	[mm]	W [mm]	h	Ø d [mm]	
Planon Frameless 1200x100mm 30W 830 White		_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	1195	100	60	-	4
Planon Frameless 1200x300mm 40W 830 White	_	_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	1195	295	60		2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product sizes (in mm)



ø300













Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im LIGHT SOURCE	K	CRI		P
Planon Frameless Round 300mm 20W 830 White	4099854 452635	1	White	Aluminum	25 000	19.0	1750	-	3 000	> 80	120	IP20
Planon Frameless Round 450mm 28W 830 White	4099854 452666	1	White	Aluminum	25 000	28.0	2700	-	3 000	> 80	120	IP20

Product name		X NCL.	LED MODULE INTEGRATED	COMMETTOR	ACCES- SORIES NCLUBED	[mm]	W [mm]	h [mm]	Ø d [mm]	
Planon Frameless Round 300mm 20W 830 White			Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels			56	300	
Planon Frameless Round 450mm 28W 830 White	-	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	_	56	450	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product sizes (in mm)



595













Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im Light SOURCE	K	CRI		IP
Planon Plus 600x600mm 40W 830 White	4099854 452840	1	White	Aluminum	25 000	36.0	3100	-	3 000	> 80	120	IP20
Planon Plus 600x600mm 40W 840 White	4099854 452918	1	White	Aluminum	25 000	36.0	3100	-	4000	> 80	120	IP20

Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUED	[mm]	W [mm]	h [mm]	Ø d [mm]	
Planon Plus 600x600mm 40W 830 White			Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	595	595	50		3
Planon Plus 600x600mm 40W 840 White	_	_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	595	595	50	-	3

^{* 4099854452918 | ** 4099854452840}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product sizes (in mm)



595



1 200














Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	в в в в в в в в в в в в в в в в в в в	LIGHT SOURCE	K	CRI		IP
Planon Plus 300x600mm 22W 830 White	4099854 452710	1	White	Aluminum	25 000	22.0	1 600	_	3 000	> 80	120	IP20
Planon Plus 300x600mm 22W 840 White	4099854 452765	1	White	Aluminum	25 000	22.0	1 600	-	4000	> 80	120	IP20
Planon Plus 1200x300mm 40W 830 White	4099854 452970	1	White	Aluminum	25 000	36.0	3100	-	3 000	> 80	120	IP20
Planon Plus 1200x300mm 40W 840 White	4099854 453069	1	White	Aluminum	25,000	36.0	3100	_	4,000	> 80	120	IP20


Product name		X NCL.	MODULE NITEGRATIO	CONNECTOR	ACCES- SORIES INCLUERS	[mm]	W	h _[mm]	Ø d [mm]	
Planon Plus 300x600mm 22W 830 White	_		Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	595	295	50		4
Planon Plus 300x600mm 22W 840 White	_	_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	595	295	50	_	4
Planon Plus 1200x300mm 40W 830 White	-	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	1195	295	50	-	4
Planon Plus 1200x300mm 40W 840 White	_	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	1195	295	50	-	4

^{* 4099854452765; 4099854453069; | ** 4099854452710; 4099854452970}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

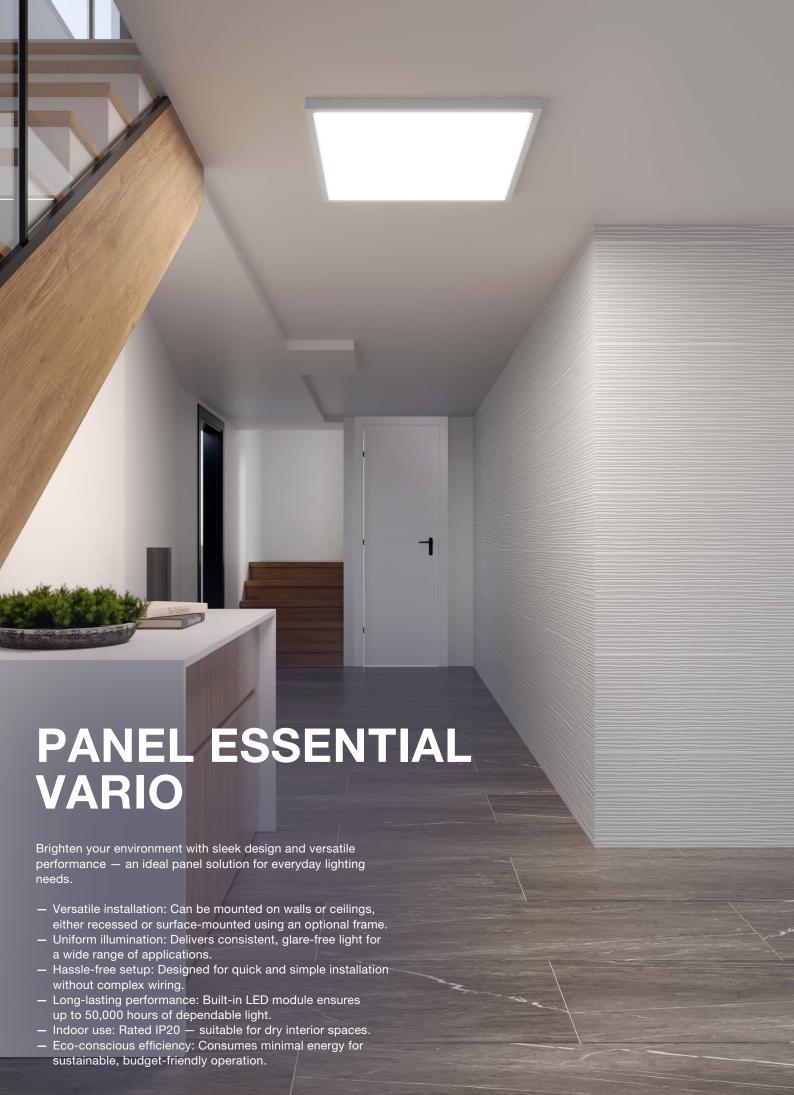
























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t h ²	W	оптрит 3	LIGHT SOURCE 4	K	CRI		IP
Panel ESS VARIO 60x60cm 40W CCT	4099854 649332	1	White	Aluminum	50 000	40	3 600	_	30006500	> 80	110	IP20
Panel ESS VARIO 60x60cm 50W CCT	4099854 649356	1	White	Aluminum	50 000	50	4500	-	30006500	> 80	90	IP20
Panel ESS VARIO 60x60cm 40W CCT UGR19	4099854 649370	1	White	Aluminum	50 000	40	3 600	-	30006500	> 80	110	IP20
Panel ESS VARIO 60x60cm 50W CCT UGR19	4099854 649394	1	White	Aluminum	50 000	50	4500	-	30006500	> 80	90	IP20

Product name		X INCAL =	MODULE WITEGRATED	CONNECTOR TYPE	ACCES- SORIES INCLUDED		(mm)	[mm]		6
Panel ESS VARIO 60x60cm 40W CCT	_	_	Not replaceable	Terminal, 2-Pole (L, N)	-	595	595	32	_	4
Panel ESS VARIO 60x60cm 50W CCT	_	_	Not replaceable	Terminal, 2-Pole (L, N)	-	595	595	32	-	4
Panel ESS VARIO 60x60cm 40W CCT UGR19	_	_	Not replaceable	Terminal, 2-Pole (L, N)	-	595	595	32	_	4
Panel ESS VARIO 60x60cm 50W CCT UGR19	_	_	Not replaceable	Terminal, 2-Pole (L, N)	-	595	595	32	-	4

^{* 4099854649370; 4099854649394}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



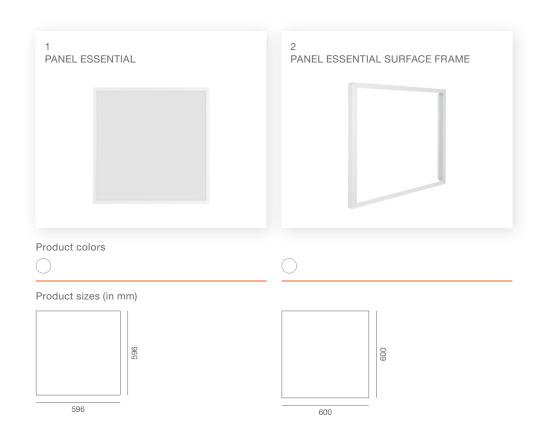





Product name		X No.	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES INCLUBED	[mm]	(mm)	(h _[mm]	Ø d [mm]	6
Panel Essential 600x600mm 4000K	10 000	_	Not replaceable	Cable, 3-pole	_	596	596	35	_	5
Panel Essential 600x600mm 6500K	10 000	-	Not replaceable	Cable, 3-pole	-	596	596	35	-	5
Panel Essential 600x600mm Surface Frame	-	-	_	-	-	600	600	50	_	10

^{* 4099854451584 | ** 4099854451621}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	очтрит 3	LIGHT SOURCE 4	K	
SMART ⁺ Wifi MAT Magnet 300x300 TW BK	4099854 473388	1	Black	Steel	30 000	26	1 400	2800	30006500	110
SMART ⁺ Wifi MAT Magnet 450x450 TW BK	4099854 473425	1	Black	Steel	30 000	42	2500	4 400	30006500	110


Product name	IP		X PICL.	LED MODULE MOGGANYE	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
SMART+ Wifi MAT Magnet 300x300 TW BK	IP20	15 000	-	Not replaceable	Screw terminal	300	300	86	-	4
SMART ⁺ Wifi MAT Magnet 450x450 TW BK	IP20	15 000	_	Not replaceable	Screw terminal	450	450	86	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im 4 SOURCE	K	
SMART ⁺ Wifi MAT Magnet 600x300 TW WT	4099854 473463	1	White	Steel	30 000	42	3 200	4 400	30006500	110
SMART ⁺ Wifi MAT Magnet 600x300 TW BK	4099854 473449	1	Black	Steel	30 000	42	2300	4 400	30006500	110

Product name	IP		X PINCL.	LED MODULE MISSIANTE	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Magnet 600x300 TW WT	IP20	15 000		Not replaceable	Screw terminal	600	300	86		4
SMART ⁺ Wifi MAT Magnet 600x300 TW BK	IP20	15 000	_	Not replaceable	Screw terminal	600	300	86	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



350





Product name	IP		X PICE.	LEO MODULE MOSCAPED	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
SMART+ Wifi Orbis Backlight White 350mm TW	IP20	15 000	-	Not replaceable	Screw terminal	350	350	90	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






SMART⁺ WIFI ORBIS[®] SADDIE

Lighting that's as dynamic as your lifestyle. Shift between vivid colours and calming whites with smart, flexible control at your fingertips.

- Modern: Smart, decorative ceiling light with two independently controllable main lights for individual lighting
- Flexible: Control via SMART⁺ App (Android 8.0+/iOS 14.0+) or voice command through Google Assistant or Amazon
- Adjustable: Colour temperature (2,700-6,500 K) and RGB function offer various lighting effects.
- Practical: Two independently controllable light sources offer flexibility for different lighting needs.
- Simple installation: Quick setup allows immediate use of ceiling light to design your home.










Product name	IP		X PICEL.	LED MODULE MOGGAZED	CON- NECTOR TYPE	[mm]	b	(h _[mm]	Ø d [mm]	
SMART ⁺ Wifi Orbis Saddie 500x500mm RGB + TW	IP20	15 000	-	Not replaceable	Screw terminal	500	500	55	-	3

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser























Product name		GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im LIGHT SOURCE	K	CRI		IP
Orbic Alicia 20273	292MM 16W 830 Click DIM Wood Decor	4099854 445651	1	Wood decor	Metal	50,000	16.0	1 000		3 000	≥ 80	120	IP20
	895MM 24W 830 Click DIM Wood Decor		1	Wood decor	Metal	50 000	24.0	1 600		3000	≥ 80	120	IP20
Orbis Alicia 495X4	195MM 36W 830 Click DIM Wood Decor	4099854 446092	1	Wood decor	Metal	50 000	36.0	2500	-	3 000	≥ 80	120	IP20


Product name		X P	LED MODULE INTEGRATED	conector TYPE	ACCES- SORIES NCLUDED	[mm]	W [mm]	h	Ø d [mm]	
Orbis Alicia 292X292MM 16W 830 Click DIM Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	292	292	55	_	6
Orbis Alicia 395X395MM 24W 830 Click DIM Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	395	395	60	-	5
Orbis Alicia 495X495MM 36W 830 Click DIM Wood Decor	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	495	495	65	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product sizes (in mm)



450





Product name	X P	LED MODULE INTEGRASED	CONNECTOR	ACCES- SORIES HIGHER	[mm]	(mm)	h [mm]	Ø d [mm]	
Orbis Spiral Layer Square 26W White	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	450	450	70	-	2


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im 4	K	
SMART ⁺ Wifi Orbis Ultra Slim Backlight 235mm White RGB + TW	4099854 473685	1	White	Plastic	30 000	19	1140	1 790	27006500	110
SMART ⁺ ORBIS Ultra Slim Backlight Black 235mm RGB + TW	4099854 473661	1	Black	Plastic	30 000	19	1 070	1790	27006500	110
SMART ⁺ Wifi Orbis Ultra Slim Backlight 400mm White RGB + TW	4099854 473722	1	White	Plastic	30 000	25	2000	2940	27006500	110
SMART ⁺ ORBIS Ultra Slim Backlight Black 400mm RGB + TW	4099854 473708	1	Black	Plastic	30 000	25	1870	2940	27006500	110

Product name	IP		X PICL.	LED MODULE MODULE	CON- NECTOR TYPE	[mm]	b	[mm]	Ø d [mm]	
SMART ⁺ Wifi Orbis Ultra Slim Backlight 235mm White RGB + TW	IP20	15 000		Not replaceable	Terminal, 2-pin		_	27	235	5
SMART ⁺ ORBIS Ultra Slim Backlight Black 235mm RGB + TW	IP20	15 000	_	Not replaceable	Terminal, 2-pin	-	_	27	235	5
SMART ⁺ Wifi Orbis Ultra Slim Backlight 400mm White RGB + TW	IP20	15 000	_	Not replaceable	Terminal, 2-pin	_	_	27	400	5
SMART ⁺ ORBIS Ultra Slim Backlight Black 400mm RGB + TW	IP20	15 000	-	Not replaceable	Terminal, 2-pin	-	-	27	400	5

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











Product name	IP		X PINCL.	LED MODULE MODULE	CON- NECTOR TYPE	[mm]	b [mm]	h [mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Claria 490 RGB TW	IP20	25 000		Not replaceable	Terminal, 3-Pole (L, N, PE)	_	-	95	490	3

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




- or Amazon Alexa for control by smartphone or voice
- Flexible light control: Main light and backlight independently controllable, with Tuneable White (3,000-6,500 K) and RGB function for multiple light scenarios.
- Individual lighting mood: Dimmable light for different brightness levels - perfect for mood or functional lighting.
- Simple installation: Quick mounting with included bracket, mounting screws and dowels - ideal for easy attachment.
- Applications: Suitable for interiors like kitchens, living rooms, children's rooms or offices, for flexible lighting.



Product colors









Product name	IP		X PICL.	LED MODULE MODULE	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
SMART ⁺ Wifi Orbis Backlight White 350mm TW	IP20	15 000		Not replaceable	Screw terminal		_	90	350	4
SMART ⁺ Wifi Orbis Backlight Black 350mm TW	IP20	15 000	_	Not replaceable	Screw terminal	-	-	90	350	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser








Product colors









Product name	IP		X NCL.	LED MODULE MISSAURE	CON- NECTOR TYPE	[mm]	b [mm]	h [mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Stea 485 RD RGBTW WT	IP20	15 000	_	Not replaceable	Screw terminal	-	_	80	485	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors










Product name	IP		X PINCL.	MODULE MODULE	CON- NECTOR TYPE	[mm]	b [mm]	h [mm]	Ø d [mm]	
SMART ⁺ Wifi MAT Spiral 500 TW WT	IP20	15 000	_	Not replaceable	Screw terminal	-	-	66	500	3

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

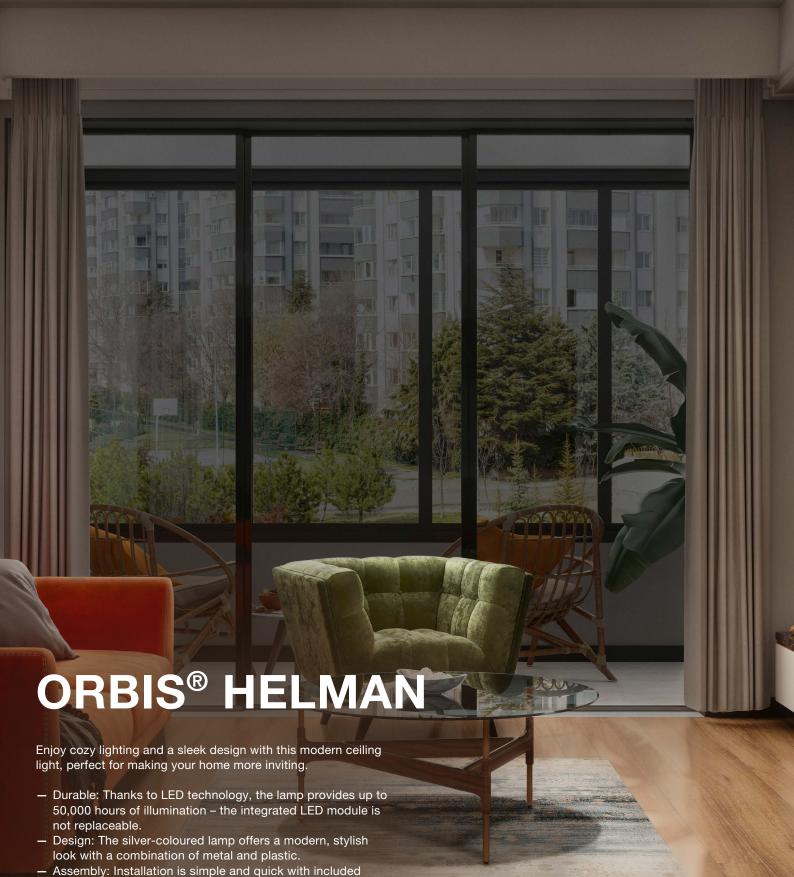

mounting screws and dowels.

and other indoor spaces.

and a solid feel.

Robust: High-quality plastic ensures long-lasting durability

Application: Ideal for living rooms, bedrooms, dining areas




Product colors





ø390















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	lm LIGHT SOURCE	K	CRI		P
Orbis Helman 295MM 16W 830 White and Silver	4099854 448065	1	Silver	Metal	50 000	16.0	1100	-	3 000	≥ 80	120	IP20
Orbis Helman 390MM 24W 830 White and Silver	4099854 448089	1	Silver	Metal	50 000	24.0	1 500	-	3 000	≥ 80	120	IP20
Orbis Helman 485MM 36W 830 White and Silver	4099854 448102	1	Silver	Metal	50 000	36.0	2500	-	3 000	≥ 80	120	IP20

Product name		X NGL	MODULE MYDANTO	CONNECTION	ACCES- SORIES NOCUMED		W	h [mm]	Ø d [mm]	6
Orbis Helman 295MM 16W 830 White and Silver	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	-	65	295	6
Orbis Helman 390MM 24W 830 White and Silver	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	-	65	390	5
Orbis Helman 485MM 36W 830 White and Silver	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	65	485	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors







ø450



ø550











Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im LIGHT SOURCE	K	CRI		IP
Orbis Pederson 450MM 24W 830 White	4099854 449789	1	White	Metal	50 000	24.0	1 450	_	3 000	≥ 80	120	IP20
Orbis Pederson 450MM 24W 830 Black	4099854 449765	1	Black	Metal	50 000	24.0	1 450	_	3 000	≥ 80	120	IP20
Orbis Pederson 550MM 36W 830 White	4099854 449826	1	White	Metal	50 000	36.0	2600	_	3 000	≥ 80	120	IP20
Orbis Pederson 550MM 36W 830 Black	4099854 449802	1	Black	Metal	50 000	36.0	2500	_	3 000	≥ 80	120	IP20

Product name		X NCL.	LED MODULE SITEGRATED	CONNECTION	ACCES- SORIES INCLUDED	[mm]	W [mm]	h [mm]	Ø d [mm]	
Orbis Pederson 450MM 24W 830 White	25 000		Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	_	80	450	4
Orbis Pederson 450MM 24W 830 Black	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	_	80	450	4
Orbis Pederson 550MM 36W 830 White	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	_	80	550	4
Orbis Pederson 550MM 36W 830 Black	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	80	550	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colors





ø395


















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	lm 3	LIGHT SOURCE	K	CRI		P
Orbis Alison 295MM 16W 830 Click DIM Wood Decor	4099854 446160	1	Wood decor	Metal	50 000	16.0	1 000		3 000	≥ 80	120	IP20
Orbis Alison 395MM 24W 830 Click DIM Wood Decor	4099854 446191	1	Wood decor	Metal	50 000	24.0	1 500	-	3 000	≥ 80	120	IP20
Orbis Alison 500MM 36W 830 Click DIM Wood Decor	4099854 446238	1	Wood decor	Metal	50 000	36.0	2600	-	3 000	≥ 80	120	IP20

Product name		X P	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLUMED		W	h	Ø d [mm]	
Orbis Alison 295MM 16W 830 Click DIM Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	-	60	295	6
Orbis Alison 395MM 24W 830 Click DIM Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	_	70	395	4
Orbis Alison 500MM 36W 830 Click DIM Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	-	65	500	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

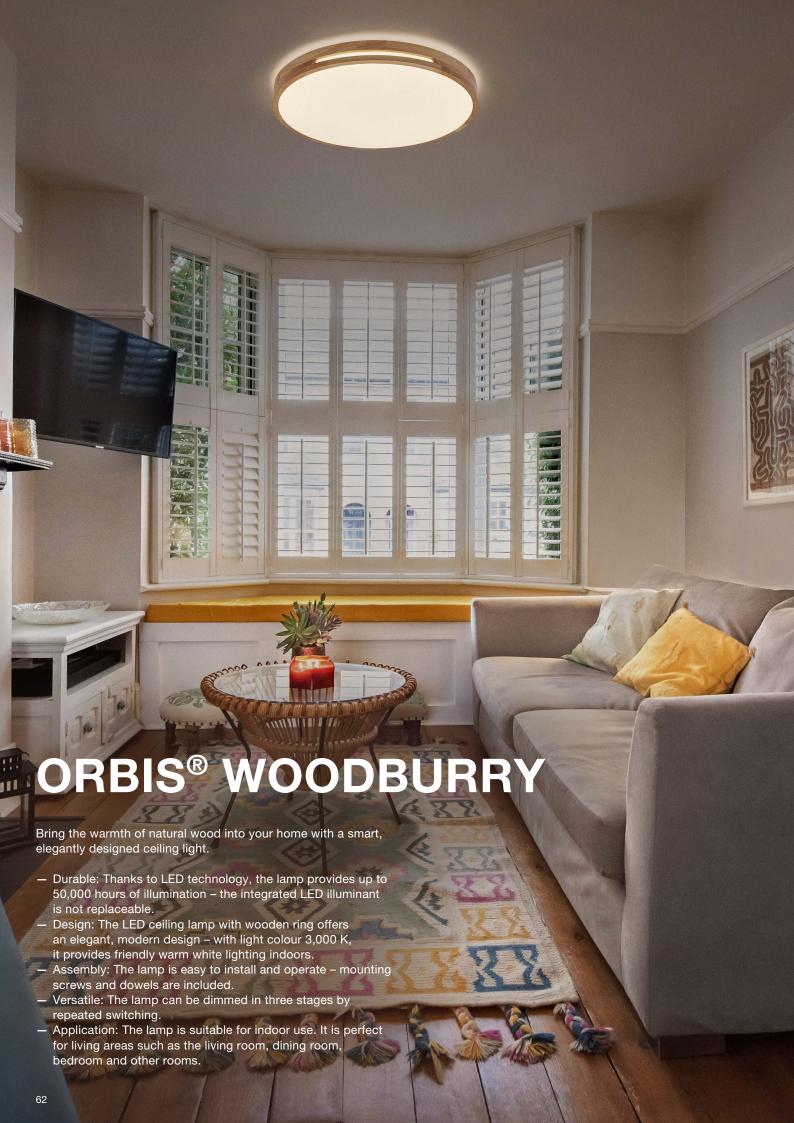




Product colors























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im 4 LIGHT SOURCE	K	CRI		P
Orbis Woodburry 300MM 16W 830 Click DIM Wood Decor	4099854 450846	1	Wood decor	Metal	50 000	16.0	1 000	-	3 000	≥ 80	120	IP20
Orbis Woodburry 390MM 24W 830 Click DIM Wood Decor	4099854 450860	1	Wood decor	Metal	50 000	24.0	1 500	-	3 000	≥ 80	120	IP20
Orbis Woodburry 500MM 36W 830 Click DIM Wood Decor	4099854 450884	1	Wood decor	Metal	50 000	36.0	2500	-	3 000	≥ 80	120	IP20

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR 1972	ACCES- SORIES HILLIUSED		(mm)	h [mm]	Ø d [mm]	
Orbis Woodburry 300MM 16W 830 Click DIM Wood Decor	25 000		Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	_	65	300	6
Orbis Woodburry 390MM 24W 830 Click DIM Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	_	70	390	4
Orbis Woodburry 500MM 36W 830 Click DIM Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	_	80	500	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














ø285





















GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im LIGHT SOURCE	K	CRI		IP
4099854 450907	1	Black	Metal	50 000	16.0	1 000	_	3 000	≥ 80	120	IP20
4099854 450969	1	Black	Metal	50 000	24.0	1 450	-	3 000	≥ 80	120	IP20
4099854 451027	1	Black	Metal	50 000	36.0	2600	-	3 000	≥ 80	120	IP20
4099854 450945	1	White	Metal	50 000	16.0	1 000	-	3 000	≥ 80	120	IP20
4099854 451003	1	White	Metal	50 000	24.0	1 450	_	3 000	≥ 80	120	IP20
4099854 451065	1	White	Metal	50 000	36.0	2600	_	3 000	≥ 80	120	IP20
4099854 450921	1	Gray	Metal	50 000	16.0	1 000	_	3 000	≥ 80	120	IP20
4099854 450983	1	Gray	Metal	50 000	24.0	1 450	_	3 000	≥ 80	120	IP20
4099854 451041	1	Gray	Metal	50 000	36.0	2600	_	3 000	≥ 80	120	IP20
	4099854450907 4099854450969 4099854451027 4099854450945 4099854451003 4099854451065 4099854450921 4099854450983	4099854450907 1 4099854450969 1 4099854451027 1 4099854450945 1 4099854451003 1 4099854451065 1 4099854450921 1 4099854450983 1	4099854450907 1 Black 4099854450969 1 Black 4099854451027 1 Black 4099854450945 1 White 4099854451003 1 White 4099854451065 1 White 4099854450921 1 Gray 4099854450983 1 Gray	4099854450907 1 Black Metal 4099854450969 1 Black Metal 4099854451027 1 Black Metal 4099854450945 1 White Metal 4099854451003 1 White Metal 4099854451065 1 White Metal 4099854450921 1 Gray Metal 4099854450983 1 Gray Metal	4099854450907 1 Black Metal 50 000 4099854450969 1 Black Metal 50 000 4099854451027 1 Black Metal 50 000 4099854450945 1 White Metal 50 000 4099854451003 1 White Metal 50 000 4099854451065 1 White Metal 50 000 4099854450921 1 Gray Metal 50 000 4099854450983 1 Gray Metal 50 000	COLOR	A099854450907 1 Black Metal 50 000 16.0 1 000	A099854450907 1 Black Metal 50000 16.0 1000 -	A099854450907 1 Black Metal 50 000 16.0 1000 - 3000	A099854450967 1 Black Metal 50 000 16.0 1000 - 3000 ≥ 80	4099854450907 1 Black Metal 50 000 16.0 1000 - 3000 ≥ 80 120

Product name		X Noc.	MODULE NITEORATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	h [mm]	Ø d [mm]	
Orbis Yummy 285MM 16W 830 Click DIM Black	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	65	285	6
Orbis Yummy 390MM 24W 830 Click DIM Black	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	70	390	4
Orbis Yummy 490MM 36W 830 Click DIM Black	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	70	490	4
Orbis Yummy 285MM 16W 830 Click DIM White	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	65	285	6
Orbis Yummy 390MM 24W 830 Click DIM White	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	70	390	4
Orbis Yummy 490MM 36W 830 Click DIM White	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	70	490	4
Orbis Yummy 285MM 16W 830 Click DIM Gray	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	_	65	285	6
Orbis Yummy 390MM 24W 830 Click DIM Gray	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	_	70	390	4
Orbis Yummy 490MM 36W 830 Click DIM Gray	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	_	70	490	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














ø300




















1 1 5 1 7 1	Black/White Black/White Black/White	Metal Metal	50 000 50 000 50 000	16.0 24.0 36.0	1 000 1 500 2 400	- - -	3 000 3 000 3 000	≥ 80 ≥ 80 ≥ 80	120 120 120	IP20 IP20
5 1 7 1	Black/White Black/White	Metal Metal	50 000	24.0	1 500	-	3 000	≥ 80	120	IP20
7 1	Black/White	Metal								
			50 000	36.0	2400	_	3 000	~ 00	120	IDOO
1 1	Mhita Maad daaar							≥ 80	120	IP20
	White/Wood decor	Metal	50 000	16.0	750	-	3 000	≥ 80	120	IP20
3 1	White/Wood decor	Metal	50 000	24.0	1 200	-	3 000	≥ 80	120	IP20
1 1	White/Wood decor	Metal	50 000	36.0	2000	_	3 000	≥ 80	120	IP20
3 1	Grey/Wood decor	Metal	50 000	16.0	750	-	3 000	≥ 80	120	IP20
9 1	Grey/Wood decor	Metal	50 000	24.0	1 200	_	3 000	≥ 80	120	IP20
) 1	Grey/Wood decor	Metal	50 000	36.0	2000	_	3 000	≥ 80	120	IP20
	4 1 8 1 9 1 0 1	8 1 Grey/Wood decor 9 1 Grey/Wood decor	8 1 Grey/Wood decor Metal 9 1 Grey/Wood decor Metal	8 1 Grey/Wood decor Metal 50 000 9 1 Grey/Wood decor Metal 50 000	8 1 Grey/Wood decor Metal 50 000 16.0 9 1 Grey/Wood decor Metal 50 000 24.0	8 1 Grey/Wood decor Metal 50 000 16.0 750 9 1 Grey/Wood decor Metal 50 000 24.0 1 200	8 1 Grey/Wood decor Metal 50 000 16.0 750 - 9 1 Grey/Wood decor Metal 50 000 24.0 1 200 -	8 1 Grey/Wood decor Metal 50 000 16.0 750 - 3000 9 1 Grey/Wood decor Metal 50 000 24.0 1 200 - 3000	8 1 Grey/Wood decor Metal 50 000 16.0 750 - 3 000 ≥ 80 9 1 Grey/Wood decor Metal 50 000 24.0 1200 - 3 000 ≥ 80	8 1 Grey/Wood decor Metal 50 000 16.0 750 - 3 000 ≥ 80 120 9 1 Grey/Wood decor Metal 50 000 24.0 1 200 - 3 000 ≥ 80 120

Product name		X P	MODULE WIEGRATED	CONNECTOR	ACCES- SORIES NELLIDED	[mm]	W [mm]	h [mm]	Ø d [mm]	
Orbis Livia 300MM 16W 830 Click DIM Black and White	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	95	300	5
Orbis Livia 430MM 24W 830 Click DIM Black and White	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	115	430	4
Orbis Livia 520MM 36W 830 Click DIM Black and White	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	115	520	3
Orbis Livia 300MM 16W 830 Click DIM White and Wood Decor	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	95	300	5
Orbis Livia 430MM 24W 830 Click DIM White and Wood Decor	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	115	430	4
Orbis Livia 520MM 36W 830 Click DIM White and Wood Decor	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	115	520	3
Orbis Livia 300MM 16W 830 Click DIM Gray and Wood Decor	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	95	300	5
Orbis Livia 430MM 24W 830 Click DIM Gray and Wood Decor	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	115	430	4
Orbis Livia 520MM 36W 830 Click DIM Gray and Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	_	_	115	520	3

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

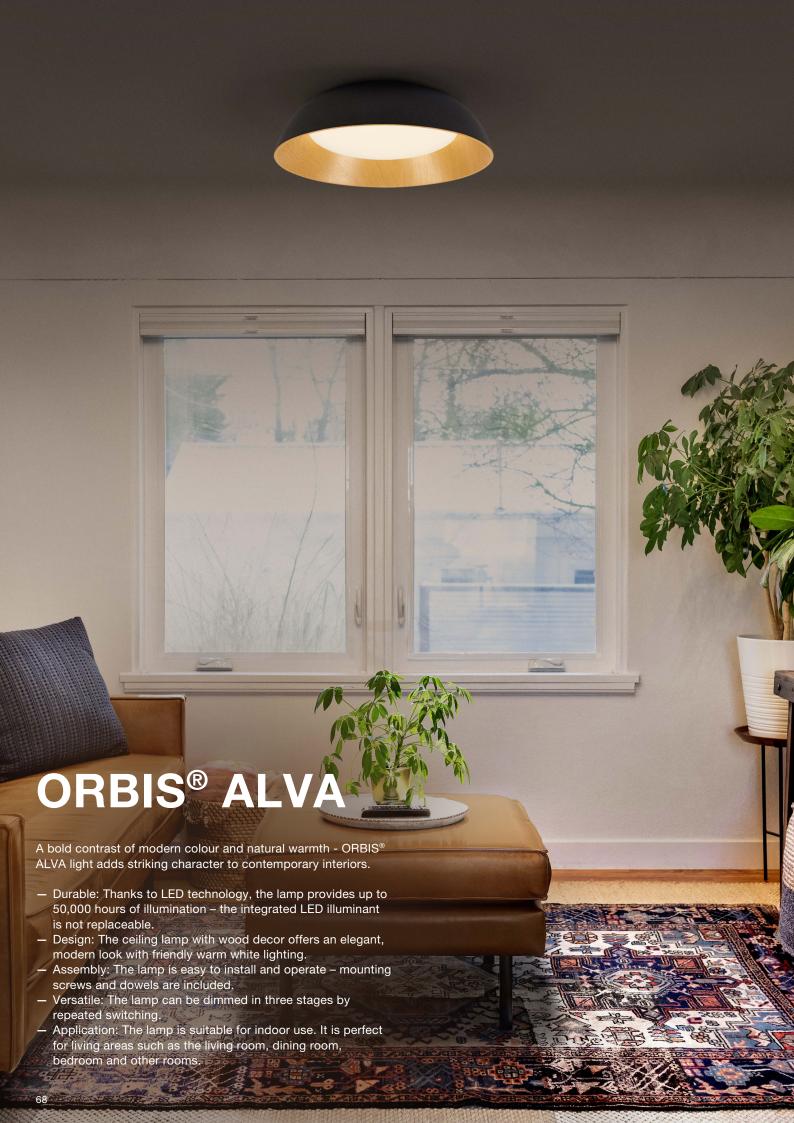























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Іт 3	Im UGHT SOURCE	K	CRI		IP
Orbis Alva 505MM 36W 830 Click DIM Black and Wood Decor	4099854 446337	1	Wood decor/Black	Metal	50 000	36.0	1 600	-	3 000	≥ 80	120	IP20
Orbis Alva 505MM 36W 830 Click DIM White and Wood Decor	4099854 446351	1	White/Wood decor	Metal	50 000	36.0	1 600	-	3 000	≥ 80	120	IP20

Product name		X No.	LED MODULE INTEGRATED	соместоя	ACCES- SORIES INCLUDED	[mm]	(mm)	h	Ø d [mm]	
Orbis Alva 505MM 36W 830 Click DIM Black and Wood Decor	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels		_	140	505	3
Orbis Alva 505MM 36W 830 Click DIM White and Wood Decor	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Dowels	-	-	140	505	3

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







ORBIS® CONCRETE

Urban edge meets warm ambience — a concrete look redefined for cozy interiors.

- Durable: Thanks to LED technology, the lamp provides up to 30,000 hours of illumination – the integrated LED illuminant is not replaceable.
- Design: The concrete lamp offers an elegant, modern design.
- Assembly: The lamp is easy to install and operate mounting screws and dowels are included.
- Versatile: The lamp can be dimmed in three stages by repeated switching.
- Application: Ideal for indoor spaces such as the living room, dining room, bedroom and more.









ø300



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im UGHT SOURCE	K	CRI		IP
Orbis Concrete 300MM 13W 830 Click Dim Gray	4099854 446634	1	Gray	Concrete	30 000	13.0	800	-	3 000	> 80	116	IP20
Orbis Concrete 400MM 18W 830 Click Dim Gray	4099854 446733	1	Gray	Concrete	30 000	18.0	1 500	-	3 000	> 80	116	IP20
Orbis Concrete 500MM 24.5W 830 Click Dim Gray	4099854 446771	1	Gray	Concrete	30 000	24.5	1 800	-	3 000	> 80	116	IP20
Orbis Concrete 300MM 13W 830 Click Dim Brown	4099854 446610	1	Brown	Concrete	30 000	13.0	800	-	3 000	> 80	116	IP20
Orbis Concrete 400MM 18W 830 Click Dim Brown	4099854 446719	1	Brown	Concrete	30 000	18.0	1 500	-	3 000	> 80	116	IP20
Orbis Concrete 500MM 24 5W 830 Click Dim Brown	///0085/ ///6757	1	Brown	Concrete	30,000	24.5	1.800		3 000	~ 80	116	IP20

Product name		X North	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES INCLUDED	[mm]	(mm)	ţh _[mm]	Ø d [mm]	a
Orbis Concrete 300MM 13W 830 Click Dim Gray	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	_	_	90	300	2
Orbis Concrete 400MM 18W 830 Click Dim Gray	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	-	100	400	2
Orbis Concrete 500MM 24.5W 830 Click Dim Gray	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	_	110	500	1
Orbis Concrete 300MM 13W 830 Click Dim Brown	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	-	90	300	2
Orbis Concrete 400MM 18W 830 Click Dim Brown	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	-	100	400	2
Orbis Concrete 500MM 24.5W 830 Click Dim Brown	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	-	110	500	1

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














ø310





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
Orbis Plate 310MM 19W 830 Click DIM Black and Blue	4099854 449840	1	Black/Blue	Steel	30 000	19.0	1 000	-	3000	80	120	IP20
Orbis Plate 430MM 35W 830 Click DIM Black and Blue	4099854 449901	1	Black/Blue	Steel	30 000	35.0	1700	-	3 000	80	120	IP20
Orbis Plate 480MM 45W 830 Click DIM Black and Blue	4099854 449963	1	Black/Blue	Steel	30 000	45.0	2200	-	3 000	80	120	IP20
Orbis Plate 310MM 19W 830 Click DIM Black and Green	4099854 449864	1	Black/Green	Steel	30 000	19.0	1 000	_	3 000	80	120	IP20
Orbis Plate 430MM 35W 830 Click DIM Black and Green	4099854 449925	1	Black/Green	Steel	30 000	35.0	1 700	_	3 000	80	120	IP20
Orbis Plate 480MM 45W 830 Click DIM Black and Green	4099854 449987	1	Black/Green	Steel	30 000	45.0	2200	-	3 000	80	120	IP20
Orbis Plate 310MM 19W 830 Click DIM Black and Orange	4099854 449888	1	Black/Yellow	Steel	30 000	19.0	1 000	-	3 000	80	120	IP20
Orbis Plate 430MM 35W 830 Click DIM Black and Orange	4099854 449949	1	Black/Yellow	Steel	30 000	35.0	1 700	-	3 000	80	120	IP20
Orbis Plate 480MM 45W 830 Click DIM Black and Orange	4099854 450006	1	Black/Yellow	Steel	30 000	45.0	2200	-	3 000	80	120	IP20
Product name		LED		ONNECTOR		ACCES- SORIES		1	w	fh	Ø	

Product name		X NCL.	MODULE INTEGRAZED	CONNECTOR	ACCES- SORIES NCLUSED	[mm]	W [mm]	h _[mm]	Ø d [mm]	
Orbic Distance Od OMM d OW OOD Office DIM Distance of Division	15000		Not controlled	Towniant O Pole (LAD)	Manakina assaus Disakin danah				040	
Orbis Plate 310MM 19W 830 Click DIM Black and Blue	15 000		Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels			83	310	3
Orbis Plate 430MM 35W 830 Click DIM Black and Blue	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	_	100	430	2
Orbis Plate 480MM 45W 830 Click DIM Black and Blue	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	-	108	480	2
Orbis Plate 310MM 19W 830 Click DIM Black and Green	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	-	83	310	3
Orbis Plate 430MM 35W 830 Click DIM Black and Green	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	-	100	430	2
Orbis Plate 480MM 45W 830 Click DIM Black and Green	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	_	108	480	2
Orbis Plate 310MM 19W 830 Click DIM Black and Orange	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	_	83	310	3
Orbis Plate 430MM 35W 830 Click DIM Black and Orange	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	_	100	430	2
Orbis Plate 480MM 45W 830 Click DIM Black and Orange	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels	-	_	108	480	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ORBIS® SPIRAL WITH CENTRAL LIGHT

Infuse your space with an artful glow. Our contemporary LED ceiling luminaire blends efficient luminosity with modern elegance, delivering ambient brilliance for any room.

- Efficient (ambient) light: This decorative LED ceiling luminaire offers bright, uniform, and energy-saving illumination.
 Control direct and indirect light separately for added versatility.
- Long life: With a lifespan of up to 30,000 hours, this ceiling light offers luminous intensity while maintaining energysaving efficiency.
- Modern design: Featuring an integrated LED module and a white metal frame, perfect for prestigious rooms and sophisticated interiors.
- Instant & flexible use: The ceiling light is very quick and easy to install.
- IP20 protection: Suitable for living rooms, bedrooms and kitchens, offering finger protection for live components.









Product colors







Product sizes (in mm)





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im 4	K	
Orbis Spiral Round 400mm 27W White	4099854 450389	1	White	Steel	30 000	27	1 600	3160	3 000	
Orbis Spiral Round 505mm 42W White	4099854 450402	2	White	Steel	30 000	42	2400	4900	3 000	-
Orbis Spiral Loop Round 505mm 42W White	4099854 450303	3	White	Steel	30 000	42	2400	4900	3 000	-

Product name	IP		X O	LED MODULE MODOWER	CON- NECTOR TYPE	[mm]	b	h	Ø d [mm]	
Orbis Spiral Round 400mm 27W White	IP20	15 000	_	Not replaceable	Screw terminal, 2-Pole (L,N)	-	_	50	400	4
Orbis Spiral Round 505mm 42W White	IP20	15 000	_	Not replaceable	Screw terminal, 2-Pole (L,N)	-	-	60	505	2
Orbis Spiral Loop Round 505mm 42W White	IP20	15 000	_	Not replaceable	Screw terminal, 2-Pole (L,N)	_	_	60	505	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colors



ø365



ø505















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	очтрит 3	LIGHT SOURCE	K	
Orbis Spiral Round 365mm 38W White	4099854 450426	1	White	Steel	30 000	38	1 900	3 480	3 000	_
Orbis Spiral Round 505mm 42W White	4099854 450440	1	White	Steel	30 000	42	2300	4990	3 000	-
Orbis Spiral Round 685mm 63W White	4099854 450464	1	White	Steel	30 000	63	4000	6 960	3 000	-


Product name	IP		X P	LEO MODULE MICOLAYES	CON- NECTOR TYPE	[mm]	(mm)	h [mm]	Ø d [mm]	
Orbis Spiral Round 365mm 38W White	IP20	15 000	_	Not replaceable	Screw terminal, 2-Pole (L,N)	-	_	56	365	4
Orbis Spiral Round 505mm 42W White	IP20	15 000	_	Not replaceable	Screw terminal, 2-Pole (L,N)	-	_	56	506	2
Orbis Spiral Round 685mm 63W White	IP20	15 000	_	Not replaceable	Screw terminal, 2-Pole (L,N)	-	_	56	685	1

^{* 4099854450426; 4099854450440}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t h ²	W	3 очтрит	LIGHT SOURCE 4	K	
Orbis Spiral Oval 360mm 27W White	4099854 450327	1	White	Steel	30 000	27	1 500	3130	3 000	
Orbis Spiral Oval 485mm 37W White	4099854 450341	1	White	Steel	30 000	37	2200	4 400	3 000	-
Orbis Spiral Oval 720mm 63W White	4099854 450365	1	White	Steel	30 000	63	3800	6 840	3 000	-

Product name	IP		X O	LED MODULE MODULE	CON- NECTOR TYPE	[mm]	b [mm]	h	Ø d [mm]	
Orbis Spiral Oval 360mm 27W White	IP20	15 000		Not replaceable	Screw terminal, 2-Pole (L,N)	360	300	56	_	4
Orbis Spiral Oval 485mm 37W White	IP20	15 000	-	Not replaceable	Screw terminal, 2-Pole (L,N)	485	385	56	-	2
Orbis Spiral Oval 720mm 63W White	IP20	15 000	_	Not replaceable	Screw terminal, 2-Pole (L,N)	720	580	56	_	1

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







ORBIS® SPIRAL LAYER ROUND

An alluring centrepiece, on or off. A ceiling luminaire that creates a captivating ambience, offering versatile lighting options that elevate your space effortlessly.

- Efficient (ambient) light: This decorative LED ceiling luminaire offers bright, uniform, and energy-saving illumination.
 Control direct and indirect light separately for added versatility.
- Long life: With a lifespan of up to 30,000 hours, this ceiling luminaire offers luminous intensity while maintaining energysaving efficiency.
- Modern design: Featuring an integrated LED module and a white metal frame, ideal for prestigious rooms and sophisticated interiors.
- Instant & flexible use: The ceiling light is very quick and easy to install.
- IP20 protection: Suitable for living rooms, bedrooms and kitchens, offering finger protection for live components.









Product name		X (P)	LED MODULE NTEGRATED	CONNECTOR TYPE	ACCES- SORIES WILLIAMS	[mm]	W	h [mm]	Ø d [mm]	
Orbis Spiral Layer CL 500MM38W830WTLEDV	15 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Mounting equipment	_	_	70	500	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im LIGHT SOURCE	K	
Orbis Slim Moia 280mm 20W White	4099854 450082	1	White	Steel	50 000	20	1 500	2200	3 000	120
Orbis Slim Moia 280mm 20W Black	4099854 450068	1	Black	Steel	50 000	20	1 500	2200	3 000	120
Orbis Slim Moia 380mm 24W 830 WT	4099854 450129	1	White	Steel	50 000	24	1800	2700	3 000	120
Orbis Slim Moia 380mm 24W 830 BK	4099854 450105	1	Black	Steel	50 000	24	1800	2700	3 000	120
Orbis Slim Moia 480mm 36W White	4099854 450167	1	White	Steel	50 000	36	2700	4500	3 000	120
Orbis Slim Moia 480mm 36W Black	4099854 450143	1	Black	Steel	50 000	36	2700	4500	3 000	120

Product name	IP		X Not.	LED MODULE EMERITARIA	CON- NECTOR TYPE	[mm]	(mm)	th _[mm]	Ø d [mm]	a
Orbis Slim Moia 280mm 20W White	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	-	40	280	4
Orbis Slim Moia 280mm 20W Black	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	-	40	280	4
Orbis Slim Moia 380mm 24W 830 WT	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	40	380	4
Orbis Slim Moia 380mm 24W 830 BK	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	40	380	4
Orbis Slim Moia 480mm 36W White	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	50	480	4
Orbis Slim Moia 480mm 36W Black	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	50	480	4

^{* 4099854450082; 4099854450068; 4099854450129; 4099854450167; 4099854450143}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	3 оптрит	LIGHT SOURCE 4	K	
Orbis Madrid 290 mm 2XE27 BK	4099854 448478	1	Black/White	Steel	_	_	_	_	_	
Orbis Madrid 290 mm 2XE27 WT	4099854 448539	1	White	Steel	-	-	-	-	-	-
Orbis Madrid 290 mm 2XE27 NK	4099854 448492	1	Nickel	Steel	-	-	-	-	-	-
Orbis Madrid 290 mm 2XE27 WD	4099854 448515	1	Wood	Steel	-	-	-	-	-	-

Product name	IP		X NCL.	LED MODULE MICCOVED	CON- NECTOR TYPE	[mm]	b [mm]	h	Ø d [mm]	
Orbis Madrid 290 mm 2XE27 BK	IP20	_		_	Terminal, 3-Pole (L, N, PE)		_	80	290	4
Orbis Madrid 290 mm 2XE27 WT	IP20	_	-	_	Terminal, 3-Pole (L, N, PE)	_	_	80	290	4
Orbis Madrid 290 mm 2XE27 NK	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	_	_	80	290	4
Orbis Madrid 290 mm 2XE27 WD	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	-	80	290	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors


ø300



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	ОПТРИТ 3	Im LIGHT SOURCE	K	
Orbis Paris 300 mm 1XE27 WT	4099854 449420	1	White	Steel/TC fabric/PVC	-	-	_	_	-	-
Orbis Paris 300 mm 1XE27 BG	4099854 449369	1	Beige	Steel/TC fabric/PVC	-	-	_	_	-	-
Orbis Paris 300 mm 1XE27 BK	4099854 449383	1	Black	Steel/TC fabric/PVC	-	-	-	-	-	-
Orbis Paris 300 mm 1XE27 BW	4099854 449406	1	Brown	Steel/TC fabric/PVC	-	-	-	-	-	-
Orbis Paris 400 mm 2XE27 WT	4099854 449505	1	White	Steel/TC fabric/PVC	-	-	-	-	-	_
Orbis Paris 400 mm 2XE27 BG	4099854 449444	1	Beige	Steel/TC fabric/PVC	-	-	-	-	-	-
Orbis Paris 400 mm 2XE27 BK	4099854 449468	1	Black	Steel/TC fabric/PVC	-	-	-	-	-	-
Orbis Paris 400 mm 2XE27 BW	4099854 449482	1	Brown	Steel/TC fabric/PVC	-	-	-	-	-	_
Orbis Paris 480 mm 3XE27 WT	4099854 449581	1	White	Steel/TC fabric/PVC	-	-	_	_	-	-
Orbis Paris 480 mm 3XE27 BG	4099854 449529	1	Beige	Steel/TC fabric/PVC	_	_	-	-	-	-
Orbis Paris 480 mm 3XE27 BK	4099854 449543	1	Black	Steel/TC fabric/PVC	_	_	-	-	-	-
Orbis Paris 480 mm 3XE27 BW	4099854 449567	1	Brown	Steel/TC fabric/PVC	-	_	-	-	-	_
									_	

Product name	IP		X NCL.	LEO MODULE MICGAYED	CON- NECTOR TYPE	[mm]	[mm]	[mm]	Ø d [mm]	
Orbis Paris 300 mm 1XE27 WT	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	-	105	300	4
Orbis Paris 300 mm 1XE27 BG	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	-	105	300	4
Orbis Paris 300 mm 1XE27 BK	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-		105	300	4
Orbis Paris 300 mm 1XE27 BW	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	-	105	300	4
Orbis Paris 400 mm 2XE27 WT	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	-	105	400	4
Orbis Paris 400 mm 2XE27 BG	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	_	105	400	4
Orbis Paris 400 mm 2XE27 BK	IP20	-	-		Terminal, 3-Pole (L, N, PE)	-	_	105	400	4
Orbis Paris 400 mm 2XE27 BW	IP20	-	-		Terminal, 3-Pole (L, N, PE)	-	_	105	400	4
Orbis Paris 480 mm 3XE27 WT	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	_	105	480	4
Orbis Paris 480 mm 3XE27 BG	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	_	105	480	4
Orbis Paris 480 mm 3XE27 BK	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	_	105	480	4
Orbis Paris 480 mm 3XE27 BW	IP20	_	-	_	Terminal, 3-Pole (L, N, PE)	-	-	105	480	4

 * 4099854449369; 4099854449369; 4099854449369; 4099854449505; 4099854449505; 4099854449444; 4099854449488 | *** 4099854449581; 4099854449529; 4099854449543; 4099854449567

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colors























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	LIGHT SOURCE 4	K	
Orbis Milan 305 mm 2XE27 BK	4099854 449284	1	Black/White	Steel	_	_	_		_	
Orbis Milan 305 mm 2XE27 WT	4099854 449345	1	White	Steel	-	-	-	-	-	-
Orbis Milan 305 mm 2XE27 NK	4099854 449307	1	Nickel	Steel	-	-	_	-	_	-
Orbis Milan 305 mm 2XE27 WD	4099854 449321	1	Wood	Steel	-	-	-	-	-	-

Product name	IP		X P	LED MODULE MISCOAFED	CON- NECTOR TYPE	[mm]	(mm)	[mm]	Ø d [mm]	
Orbis Milan 305 mm 2XE27 BK	IP20	_	_	_	Terminal, 3-Pole (L, N, PE)	_	_	100	305	4
Orbis Milan 305 mm 2XE27 WT	IP20	-	_	-	Terminal, 3-Pole (L, N, PE)	_	_	100	305	4
Orbis Milan 305 mm 2XE27 NK	IP20	-	_	-	Terminal, 3-Pole (L, N, PE)	_	_	100	305	4
Orbis Milan 305 mm 2XE27 WD	IP20	-	_	-	Terminal, 3-Pole (L, N, PE)	_	_	100	305	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ORBIS® LONDON Enjoy evenly distributed, inviting warmth for any indoor space, designed for easy installation and long-lasting performance. Pleasant light: Modern round ceiling luminaire that delivers excellent warm white light with even distribution from the integrated LED module. - Versatile: Ideal for indoors, such as living rooms, dining rooms, playrooms, bedrooms or home offices. Long life: The LED ceiling luminaire has a very long lifespan of up to 50,000 hours while being energy-efficient. Instant & flexible use: The ceiling light is very quick and easy to install. IP20 protection: Ideal for indoor use, offering finger protection for live components.




Product colors





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _{bl} ²	W	Im 3	Im LIGHT SOURCE	ĸ	\(\hat{\chi}\)
Orbis London 280 mm 16W 830 WT	4099854 448379	1	White	Metal	50 000	16	1 050	2000	3 000	120
Orbis London 280 mm 16W 830 BK	4099854 448348	1	Black	Metal	50 000	16	1 000	2000	3 000	120
Orbis London 400 mm 24W 830 WT	4099854 448416	1	White	Metal	50 000	24	1 500	2700	3 000	120
Orbis London 400 mm 24W 830 BK	4099854 448393	1	Black	Metal	50 000	24	1 450	2700	3 000	120
Orbis London 480 mm 36W 830 WT	4099854 448454	1	White	Metal	50 000	36	2500	4700	3 000	120
Orbis London 480 mm 36W 830 BK	4099854 448430	1	Black	Metal	50 000	36	2200	4700	3 000	120

Product name	IP		X NCL.	LED MODULE MISSPORTS	CON- NECTOR TYPE	[mm]	(mm)	ţh [mm]	Ø d [mm]	a
Orbis London 280 mm 16W 830 WT	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	_	-	70	280	6
Orbis London 280 mm 16W 830 BK	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	70	280	6
Orbis London 400 mm 24W 830 WT	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	75	395	5
Orbis London 400 mm 24W 830 BK	IP20	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	75	395	5
Orbis London 480 mm 36W 830 WT	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	-	95	480	4
Orbis London 480 mm 36W 830 BK	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	-	95	480	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ORBIS® DUBLIN


Immerse yourself in silver elegance and warmth with our ORBIS DUBLIN ceiling luminaire. Elevate any indoor space with its comforting, even warm white glow.

- Pleasant light: Modern round ceiling luminaire that delivers excellent warm white light with even distribution from the integrated LED module.
- Versatile: Ideal for indoor use, such as living rooms, dining rooms, playrooms, bedrooms or home offices.
- Long life: The LED ceiling luminaire has a very long life of up to 50,000 hours while being energy-efficient.
- Instant & flexible use: The ceiling luminaire is very quick and easy to install.
- IP20 protection: Ideal for indoor use, offering finger protection for live components.



Product colors















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	3 оптрит	LIGHT SOURCE 4	K	
Orbis Dublin 300 mm 16W 830 SI	4099854 447709	1	Silver	Metal	50 000	16	1 100	2000	3 000	120
Orbis Dublin 390 mm 24W 830 SI	4099854 447747	1	Silver	Metal	50 000	24	1 600	2700	3 000	120
Orbis Dublin 490 mm 36W 830 SI	4099854 447761	1	Silver	Metal	50 000	36	2800	4700	3 000	120

Product name	IP		X P	LED MODULE MODULE	CON- NECTOR TYPE	[mm]	(mm)	h [mm]	Ø d [mm]	
Orbis Dublin 300 mm 16W 830 SI	IP20	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	_	_	60	295	6
Orbis Dublin 390 mm 24W 830 SI	IP20	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	_	_	75	390	5
Orbis Dublin 490 mm 36W 830 SI	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	78	487	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colors






















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im LIGHT SOURCE	K	
Orbis Berlin 300 mm 16W 830 SI	4099854 446399	1	Silver	Metal	50 000	16	1 000	2000	3 000	120
Orbis Berlin 300 mm 16W 830 BK	4099854 446375	1	Black	Metal	50 000	16	1 000	2000	3 000	120
Orbis Berlin 390 mm 24W 830 SI	4099854 446559	1	Silver	Metal	50 000	24	1 500	2700	3 000	120
Orbis Berlin 390 mm 24W 830 BK	4099854 446412	1	Black	Metal	50 000	24	1 450	2700	3 000	120
Orbis Berlin 490 mm 36W 830 SI	4099854 446597	1	Silver	Metal	50 000	36	2 4 5 0	4700	3 000	120
Orbis Berlin 490 mm 36W 830 BK	4099854 446573	1	Black	Metal	50 000	36	2400	4700	3 000	120

Product name	(IP)		X NCL.	LED MODULE PRESENTED	CON- NECTOR TYPE	[mm]	b [mm]	ţ <u>h</u>	Ø d [mm]	a
Orbis Berlin 300 mm 16W 830 SI	IP20	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	_	_	65	293	6
Orbis Berlin 300 mm 16W 830 BK	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	65	293	6
Orbis Berlin 390 mm 24W 830 SI	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	78	390	5
Orbis Berlin 390 mm 24W 830 BK	IP20	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	_	_	78	390	5
Orbis Berlin 490 mm 36W 830 SI	IP20	25 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	80	492	4
Orbis Berlin 490 mm 36W 830 BK	IP20	25 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	80	492	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

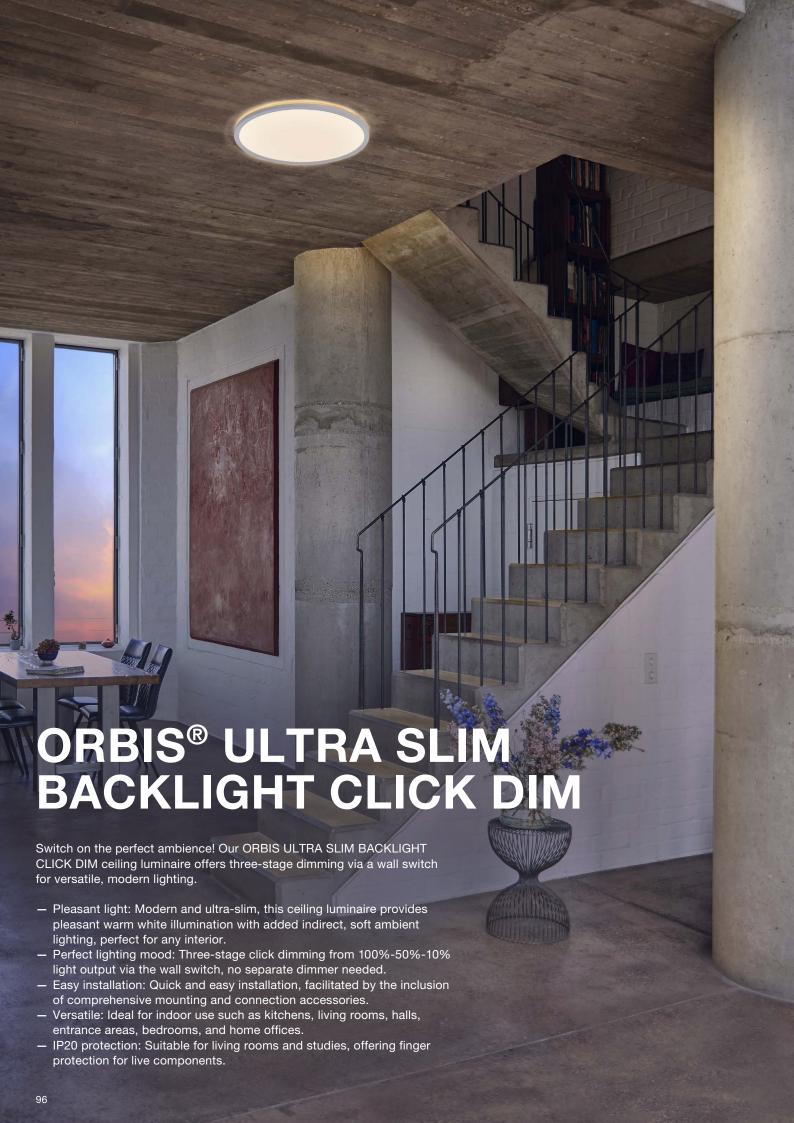
































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	output 3	LIGHT SOURCE 4	K	
Orbis Ultra Slim Backlight Click-Dim 235mm White15W	4099854 450785	1	White	Plastic	50 000	15	1100	1 640	3 000	110
Orbis Ultra Slim Backlight Click-Dim 235mm Black 15W	4099854 450761	1	Black	Plastic	50 000	15	1 020	1 640	3 000	110
Orbis Ultra Slim Backlight Click-Dim 400mm White 22W	4099854 450822	1	White	Plastic	50 000	22	1 850	2720	3 000	110
Orbis Ultra Slim Backlight Click-Dim 400mm Black 22W	4099854 450808	1	Black	Plastic	50 000	22	1740	2720	3 000	110


Product name	IP		NCL.	LED MODULE INTERMEDIA	CON- NECTOR TYPE	[mm]	b [mm]	h [mm]	Ø d [mm]	
Orbis Ultra Slim Backlight Click-Dim 235mm White15W	IP20	25 000	_	Not replaceable	Terminal, 2-pin	_	_	27	235	5
Orbis Ultra Slim Backlight Click-Dim 235mm Black 15W	IP20	25 000	_	Not replaceable	Terminal, 2-pin	_	_	27	235	5
Orbis Ultra Slim Backlight Click-Dim 400mm White 22W	IP20	25 000	_	Not replaceable	Terminal, 2-pin	_	_	27	400	5
Orbis Ultra Slim Backlight Click-Dim 400mm Black 22W	IP20	25 000	-	Not replaceable	Terminal, 2-pin	-	_	27	400	5

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



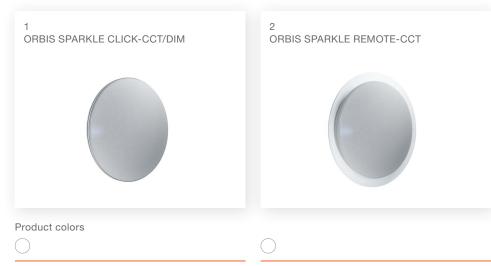























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Іт 3	LIGHT SOURCE	K	
Orbis Sparkle Click-CCT 400mm 24W	4099854 450181	1	White	Aluminum	30 000	24	2000	2880	27006500	120
Orbis Sparkle Click-DIM 400mm 24W	4099854 450204	1	White	Aluminum	30 000	24	2000	2880	3 000	120
Orbis Sparkle Remote-CCT 460mm 24W	4099854 450228	2	White	Aluminum	30 000	28	2000	3120	28006000	120
Orbis Sparkle Remote-CCT 560mm 32W	4099854 450242	2	White	Aluminum	30 000	38	2800	4640	28006000	120

Product name	IP		X PRGL.	MODULE MODULE MODULE	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
Orbis Sparkle Click-CCT 400mm 24W	IP20	15 000		Not replaceable	Terminal, 3-pin	_	400	91	400	6
Orbis Sparkle Click-DIM 400mm 24W	IP20	15 000	-	Not replaceable	Terminal, 3-pin	-	400	91	400	6
Orbis Sparkle Remote-CCT 460mm 24W	IP20	15 000	-	Not replaceable	Terminal, 3-pin	-	-	91	500	6
Orbis Sparkle Remote-CCT 560mm 32W	IP20	15 000	_	Not replaceable	Terminal, 3-pin	_	560	120	560	6

^{* 4099854450204 | ** 4099854450181; 4099854450228; 4099854450242 | *** 4099854450181 | **** 4099854450228; 4099854450242}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser








Product colors



















GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	3 оптрит	LIGHT SOURCE 4	K	
4099854 446870	1	White	Aluminum	25 000	15	1 000	1 700	2700 K/4 000 K/6 500	120
4099854 446894	1	White	Aluminum	25 000	17	1 000	1 800	27006500	120
4099854 446917	2	White	Aluminum	25 000	24	1 800	3 000	2700 K/4 000 K/6 500	120
4099854 446931	2	White	Aluminum	25 000	25	1 800	3 000	27006500	120
	4099854 446870 4099854 446894 4099854 446917	4099854 44687 0 1 4099854 44689 4 1 4099854 446917 2	4099854446870 1 White 4099854446894 1 White 4099854446917 2 White	4099854446870 1 White Aluminum 4099854446894 1 White Aluminum 4099854446917 2 White Aluminum	4099854446870 1 White Aluminum 25 000 4099854446894 1 White Aluminum 25 000 4099854446917 2 White Aluminum 25 000	4099854446870 1 White Aluminum 25000 15 4099854446894 1 White Aluminum 25000 17 4099854446917 2 White Aluminum 25000 24	4099854446870 1 White Aluminum 25 000 15 1 000 4099854446894 1 White Aluminum 25 000 17 1 000 4099854446917 2 White Aluminum 25 000 24 1 800	4099854446870 1 White Aluminum 25 000 15 1 000 1700 4099854446894 1 White Aluminum 25 000 17 1 000 1 800 4099854446917 2 White Aluminum 25 000 24 1 800 3 000	4099854446870 1 White Aluminum 25000 15 1000 1700 2700 K/4 000 K/6 500 4099854446894 1 White Aluminum 25000 17 1000 1800 27006500 4099854446917 2 White Aluminum 25000 24 1800 3000 2700 K/4 000 K/6 500

Product name	IP		X PICL.	LED MODULE MICHARITS	CON- NECTOR TYPE	[mm]	(mm)	h [mm]	Ø d [mm]	
Orbis Click-CCT 310mm 14W	IP20	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)			80	310	5
Orbis Remote-CCT 310mm 14W	IP20	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	_	-	80	310	5
Orbis Click-CCT 410mm 24W	IP20	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	-	80	410	5
Orbis Remote-CCT 410mm 25W	IP20	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	-	80	410	5

^{* 4099854446870; 4099854446917 | ** 4099854446894; 4099854446931}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product sizes (in mm)



ø300














Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	lm 3	LIGHT SOURCE	K	
Orbis Pure 300mm 14.5W	4099854 450020	1	White	Aluminum	25 000	14.5	1100	1 600	3 000	120
Orbis Pure 400mm 24W	4099854 450044	1	White	Aluminum	25 000	24.0	1 800	2700	3 000	120

Product name	IP		X NCL.	LED MODULE MISCOVITS	CON- NECTOR TYPE	[mm]	(mm)	h [mm]	Ø d [mm]	
Orbis Pure 300mm 14.5W	IP20	15 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	_	80	300	6
Orbis Pure 400mm 24W	IP20	15 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	-	-	80	400	5

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im 4 SOURCE	K	
Ceiling Essential 250mm E27	4099854 444609	1	White	Metal	-	-	-	-	-	-
Ceiling Essential 350mm 2xE27	4099854 444623	1	White	Metal	-	-	-	-	-	-

Product name	IP		X P	LED MODULE MICONITO	CON- NECTOR TYPE	[mm]	<u>b</u>	[mm]	Ø d mm]	
Ceiling Essential 250mm E27	IP20	_		_	Terminal, 3-Pole (L, N, PE)	_	_	91	250	5
Ceiling Essential 350mm 2xE27	IP20	-	-	-	Terminal, 3-Pole (L, N, PE)	-	-	115	350	5

^{* 4099854444609 | ** 4099854444623}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


CEILING ESSENTIAL WITH INTEGRATED LED MODULE


Timeless design meets versatile lighting. Our LEDVANCE ESSENTIAL ceiling luminaire offers six tones from warm to cool white.

- Description: This compact ceiling luminaire provides three different white light tones from warm to cool white.
- Lifetime: The integrated LED module has a life of up to 20,000 hours.
- Quick and easy installation: Screws and wall plugs are included.
- Application: Ideal for various indoor settings such as playrooms, kitchens, storage rooms and hallways, where design is not the primary focus.
 - IP20 protection: Suitable for living rooms and studies.



Product colors



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _M ²	W	Im 3	Im 4	K	
Ceiling Essential 250mm 13W 3000K	4099854 444685	1	White	Plastic	20 000	13	920	1 300	3 000	120
Ceiling Essential 250mm 13W 4000K	4099854 445187	1	White	Plastic	20 000	13	960	1 500	4000	120
Ceiling Essential 250mm 13W 6500K	4099854 445262	1	White	Plastic	20 000	13	960	1 500	6 500	120
Ceiling Essential 400mm 24W 3000K	4099854 445323	1	White	Plastic	20 000	24	1 920	2800	3 000	120
Ceiling Essential 400mm 24W 4000K	4099854 445415	1	White	Plastic	20 000	24	1 920	3100	4000	120
Ceiling Essential 400mm 24W 6500K	4099854 445453	1	White	Plastic	20 000	24	1 920	3100	6 500	120

Product name	IP		X Not.	LED MODULE MISSIPATE	CON- NECTOR TYPE	[mm]	(mm)	ţ <u>h</u> [mm]	Ø d [mm]	a
Ceiling Essential 250mm 13W 3000K	IP20	50 000	-	Not replaceable	Cable, 3-pole	_	_	91	250.0	10
Ceiling Essential 250mm 13W 4000K	IP20	50 000	-	Not replaceable	Cable, 3-pole	-	_	91	250.0	10
Ceiling Essential 250mm 13W 6500K	IP20	50 000	-	Not replaceable	Cable, 3-pole	-	_	91	250.0	10
Ceiling Essential 400mm 24W 3000K	IP20	50 000	-	Not replaceable	Cable, 3-pole	-	_	120	400.0	5
Ceiling Essential 400mm 24W 4000K	IP20	50 000	-	Not replaceable	Cable, 3-pole	-	_	120	400.0	5
Ceiling Essential 400mm 24W 6500K	IP20	50 000	-	Not replaceable	Cable, 3-pole	-	_	120	400.0	5

^{* 4099854444685; 4099854445323 | ** 4099854445187; 4099854445415 | *** 4099854445262; 4099854445453}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









Product colors





Product sizes (in mm)

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	lm 3	Im LIGHT SOURCE	K	
SMART ⁺ Wifi Ceiling Fan LED Round 550mm + RC	4099854 472824	1	White	Plastic (ABS)	30 000	75	3 000	4100	30006500	100
SMART ⁺ Wifi Ceiling Fan LED Cylinder 550mm + RC	4099854 472800	2	Gray	Plastic (ABS)	30 000	78	2500	4500	30006500	100

Product name	IP		X NCL.	LED MODULE MICCONTED	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
SMART ⁺ Wifi Ceiling Fan LED Round 550mm + RC	IP20	15 000	-	Not replaceable	Terminal	602	600	216	-	2
SMART ⁺ Wifi Ceiling Fan LED Cylinder 550mm + RC	IP20	15 000	-	Not replaceable	Terminal	602	600	216	-	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
Ceiling Fan Grill Ring 55W CCT White	4099854 445552	1	White	Steel/Plastic	30 000	55.0	3100	4200	30006500 K	> 80	260	IP20
Ceiling Fan Grill Square 55W CCT White	4099854 445613	2	White	Steel/Plastic	30 000	55.0	3100	4200	30006500 K	> 80	175	IP20

Product name		X PINGL.	MODULE NYEGRAYED	OCRAECTOR TYPE	ACCES- SONES HOLOSO		(mm)	[mm]	Ø d [mm]	
Ceiling Fan Grill Ring 55W CCT White	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Remote control	-	_	135	500	1
Ceiling Fan Grill Square 55W CCT White	15000	-	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Remote control	553	553	157	-	1

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











Product name	I X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES SORES VILLOR	[mm]	w [mm]	(h _[mm]	Ø d [mm]	
Ceiling Fan Compact 480 49W White	15 000 -	Not replaceable	Terminal, 2-Pole (L, N)	Mounting screws, Plastic dowels, Remote control	-	-	215	480	1

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




CEILING FAN RETRACTABLE

Where light meets airflow - intelligent design for modern living.

- All-in-one solution: This refined white ceiling light with integrated fan combines clean, modern looks with intelligent functionality.
- Built to last: Crafted from durable plastic, the fixture offers consistent, energy-efficient illumination for up to 20,000 hours.
- Customizable ambiance: three different white light tones (3000K/4000K/6500K) to suit any setting – from warm and relaxing to cool and energizing – with a high color rendering index (CRI >80) for true-to-life tones.
- For indoor use: Rated IP20, it's the ideal choice for dry interior spaces where both style and comfort matter.









Product name		X P	MODULE INTEGRATED	CONNECTOR	ACCES- SORES PROJOTO	(mm)	W [mm]	(h _[mm]	Ø d [mm]	
Ceiling Fan Retractable 1070 66W White	20 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Mounting screws, Plastic dowels, Remote control, Mounting equipment	-	-	385	490	1

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product sizes (in mm)



ø300



ø400















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	lm 3	LIGHT SOURCE	K	
Orbis IP44 Sensor 300mm 15.5W	4099854 448126	1	White	Aluminum	25 000	15.5	1100	1 600	3 000	120
Orbis IP44 Sensor 400mm 25W	4099854 448140	1	White	Aluminum	25 000	25.0	1 800	2700	3 000	120

Product name	IP		X PICL.	LED MODULE MINICASTED	CON- NECTOR TYPE	[mm]	(mm)	h [mm]	Ø d [mm]	
Orbis IP44 Sensor 300mm 15.5W	IP44	12500		Not replaceable	Terminal, 3-Pole (L, N, PE)			83	300	6
Orbis IP44 Sensor 400mm 25W	IP44	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)			83	400	5

^{* 4099854448126}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

WALL LUMINAIRES


Light doesn't always have to come from the ceiling. With our versatile wall luminaires you can give your rooms a unique atmosphere. Experience all the benefits of our products, including energy efficiency, durability and a sense of style.

Our luminaires bring your walls to life. Colourful or elegantly dimmed, you can control our smart luminaires remotely with an app or your voice assistant. Simple, but really smart. Luminously beautiful.








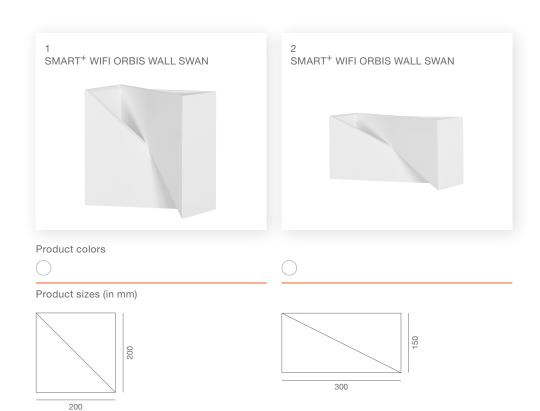



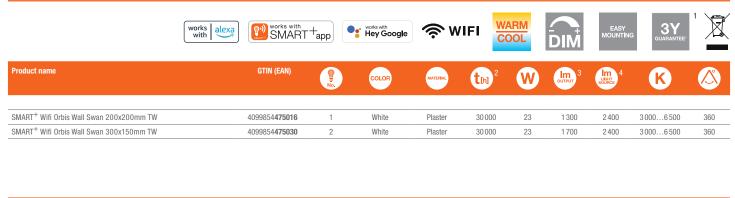

Product name	IP		X Prot.	LED MODULE MICHARD	CON- NECTOR TYPE	[mm]	b	ţh _[mm]	Ø d [mm]	
SMART ⁺ Wifi Orbis Wall Swan 200x200mm TW	IP20	15 000		Not replaceable	Screw terminal	200	200	110	_	4
SMART ⁺ Wifi Orbis Wall Swan 300x150mm TW	IP20	15 000	_	Not replaceable	Screw terminal	300	150	105	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


SMART⁺ WIFI ORBIS[®] WALL TWIST From soft ambient tones to focused brightness, this smart wall light delivers flexibility with refined, contemporary appeal. Smart: Controllable via the SMART+ App, Google Assistant or

- Smart: Controllable via the SMART+ App, Google Assistant or Amazon Alexa to allow easy and convenient adjustment of the lighting.
- Flexible: Adjustable colour temperature from 3,000 to 6,500 K, ideal for different requirements and time periods.
- Adjustable: Dimmable so that the brightness can be adapted to the respective situation or mood.
- Practical: Thanks to the quick and easy installation with the enclosed mounting screws and wall plugs, the light is ready to use in no time.
- Use: Ideal for versatile indoor applications, including kitchen, living room, children's room and study, for flexible and atmospheric lighting.





























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	LIGHT SOURCE 4	K	
SMART ⁺ Wifi Orbis Wall Twist 230x127mm Black TW	4099854 475054	1	Black	Aluminum	30 000	12	700	1 200	30006500	360
SMART ⁺ Wifi Orbis Wall Twist 230x127mm White TW	4099854 475078	1	White	Aluminum	30 000	12	900	1 200	30006500	360

Product name	IP		X NCL.	LED MODULE MOSQUITE	CON- NECTOR TYPE	[mm]	b	h [mm]	Ø d [mm]	
SMART ⁺ Wifi Orbis Wall Twist 230x127mm Black TW	IP20	15 000	-	Not replaceable	Screw terminal	127	95	230	-	4
SMART ⁺ Wifi Orbis Wall Twist 230x127mm White TW	IP20	15 000	-	Not replaceable	Screw terminal	127	95	230	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	LIGHT SOURCE 4	K	
SMART ⁺ Wifi Orbis Wall Wood 110X110mm TW	4099854 475092	1	Wood	Wood	30 000	7	400	600	30006500	360
SMART ⁺ Wifi Orbis Wall Wood 210X110mm TW	4099854 475115	2	Wood	Wood	30 000	12	800	1 200	30006500	360

IP		X PICL.	LEO MODULE MODULETE	CON- NECTOR TYPE	[mm]	(mm)	h [mm]	Ø d [mm]	
IDOO	15,000		Not controvable	0	110	110	110		
IP20	15 000		Not replaceable	Screw terminal Screw terminal	110	110	210		4
	IP20 IP20	IP20 15000	IP20 15000 -	IP20 15 000 – Not replaceable	IP20 15000 – Not replaceable Screw terminal	IP20 15 000 – Not replaceable Screw terminal 110	IP20 15 000 – Not replaceable Screw terminal 110 110	IP20	IP20 15 000 – Not replaceable Screw terminal 110 110 110 –

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



With ready-made packages, you can offer your customers a wide range of well-designed and individual wall and ceiling lighting solutions.

These intelligent product combinations are a real boost to the appeal of your offer. This is an affordable, high-quality way to provide your customers with unique and exciting wall and ceiling products.





ATTRACTIVE SHELF DESIGN

A shelf full of ready-made incentives. See a variety of sophisticated and customised lighting solutions. Our wide variety of wall and ceiling luminaires is offered in accessible combinations.

The shelf is a real eye-catcher and perfectly tailored to the needs of the target audience. Product-specific details and features are presented in a clear and intuitive style. Everything at a glance, available as both full and half shelf displays.




COMPACT DISPLAYS

Attractive, informative and space-saving.

Our eye-catching displays provide a top-quality product presentation, thoughtfully designed to meet your needs.

SYMBOLS IN THE TABLES

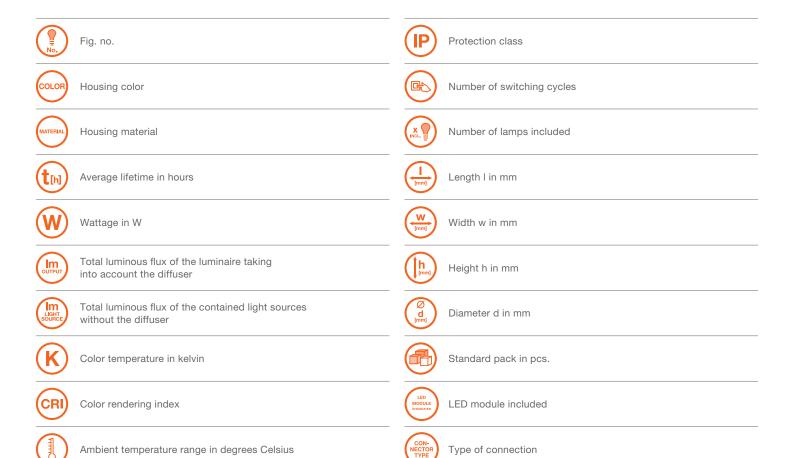


PRODUCT-SPECIFIC SYMBOLS

Beam angle in degrees °



PRODUCT-SPECIFIC SYMBOLS

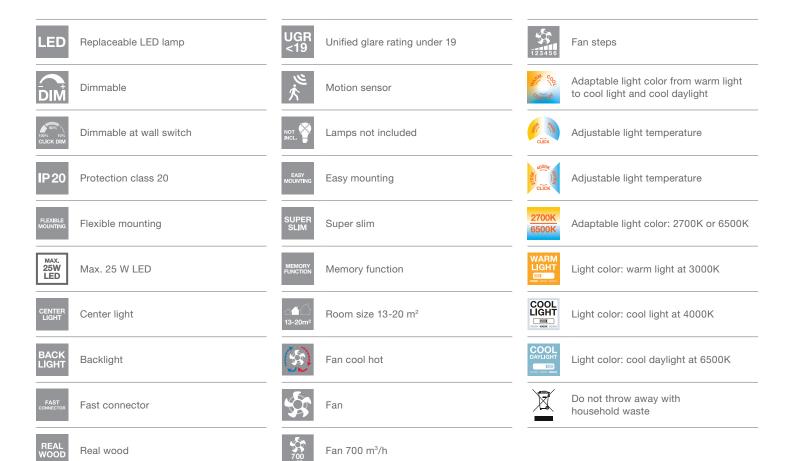





ABOUT LEDVANCE

With business activities in over 140 countries, LEDVANCE is one of the world's leading companies in the field of general lighting. Originating from the general lighting division of OSRAM GmbH, LEDVANCE 's portfolio includes LED lamps and luminaires, intelligent lighting products, traditional lamps and renewable energy solutions. #POWERTHROUGHLIGHT

LEDVANCE GmbH Parkring 1-5 85748 Garching Germany www.ledvance.com

Customer Service Centre: kundenservice.retail@ledvance.com Germany: Phone: +49 89 780673-660 Austria: Phone: +43 1 68068

LEDVANCE is a licensee for the product trademark OSRAM for lamps & luminaire products in general lighting.