



OUR STRENGTHS ARE YOUR ADVANTAGE



COOPERATIVE

As a dedicated and collaborative partner, LEDVANCE boasts a vast, worldwide sales team and over a century of experience, ensuring we stand by your side at all times.



VERSATILE

Modern, smart, decorative, functional, robust and practical – our extensive portfolio meets customer requirements in all categories and virtually every area of application.



SALES-BOOSTING

Attract attention, encourage purchases. We offer targeted support for your sales with creative, pre-tested marketing concepts.



CARING

We are committed to contributing to a greener planet by reducing CO_2 emissions and waste through sustainable products, solutions and processes. We empower our customers to use light more efficiently to save energy and reduce their environmental footprint.



UNIQUE

Fresh, dynamic, high-quality and bold – we know at an early stage what interests customers and where lighting trends are heading. LEDVANCE is unmistakably LEDVANCE.



INNOVATION MEETS TRADITION

We embody progress and the passion to shape the future of lighting actively. By blending our courage to explore new paths with our experience from more than 100 years of lighting expertise, we lead the way forward.



ALL IN ONE


At LEDVANCE, we've got everything you need from a single source – LED luminaires, lamps, and Smart Home products. We offer you a wide range of innovative and market-driven solutions, setting new trends along the way.




FIRST-CHOICE PARTNER

As the perfect strategic ally, we offer an extensive portfolio, a robust sales network, and unparalleled global market access to fulfill all your requirements.

GLOBAL PRESENCE

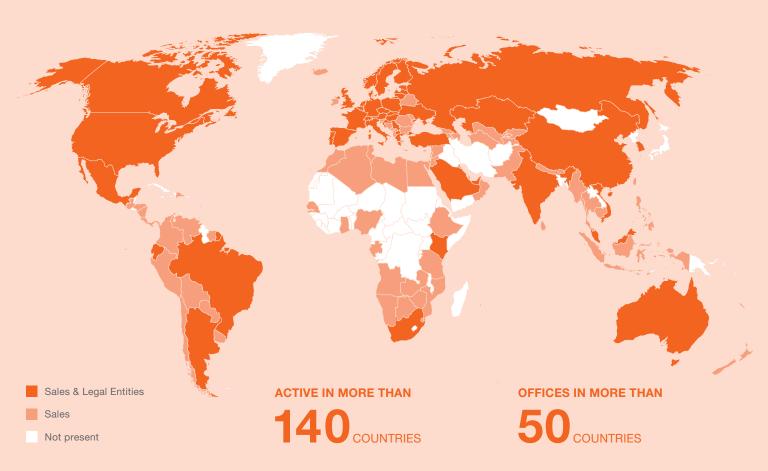

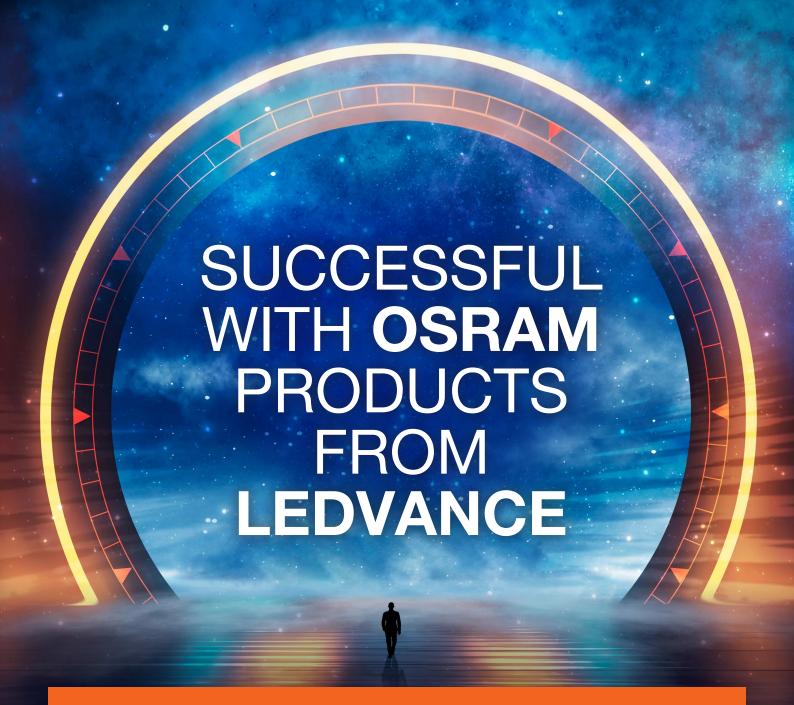

As an exclusive licence partner, LEDVANCE offers all its general lighting solutions in the well-known OSRAM brand, creating even greater potential and generating even higher sales.

MAXIMUM BRAND AWARENESS: LIGHT MEANS OSRAM

OSRAM is the ultimate lighting expert, setting standards in lighting technology around the world for well over 100 years and epitomising quality, efficiency and progressive ideas.

INNOVATION AND TRADITION: THE CORNERSTONE OF YOUR SUCCESS

The licencing partnership with OSRAM allows LEDVANCE to offer you the best of both worlds – a well-known brand, innovative, sustainable products and a reliable partnership.

MANY PRODUCTS, ONE SUPPLIER: MORE THAN 1,500 NEW OSRAM-BRANDED PRODUCTS

LEDVANCE offers a huge selection of OSRAM-branded luminaires, lamps and smart solutions – anything from decorative luminaires and work lights to outdoor lighting. And everything from a single source.

OSRAM-BRANDED LIGHTING SOLUTIONS. A STRONG BRAND THAT IS THE KEY TO YOUR SUCCESS.

BROUGHT TO LIGHT: OUR NEW PACKAGING

Thanks to clear brand allocation, concise product information and graphic categorisation, customers can instantly find the right OSRAM product - regardless of placement.



OSRAM SEAL AND CATEGORY REFERENCE

so that the brand and application are instantly recognisable even when the product is placed horizontally

APPLICATION ICON

for clear categorisation











► A UNIFORM LOOK FOR **ALL PRODUCTS**

GOOD NEWS: OUR PRODUCT BROCHURES

Of course, we will continue to keep you posted about our product innovations and entire portfolio. You will recognise our new brochures by the OSRAM logo under the LEDVANCE lettering. And of course by their convincing content.







▶ EVERYTHING STAYS BETTER -**INCLUDING OUR COMMUNICATION**

SALES RIGHT DOWN THE LINE: OUR PRODUCT PRESENTATIONS AT THE POS

Our well-thought-out PoS concepts provide an attractive stage for your lighting products and also give you plenty of cross-selling options to help you generate considerable additional sales.









ENORMOUS CROSS-SELLING POTENTIAL

CONTENT

LEDVANCE POWER THROUGH LIGHT	2	- SOLAR FLOODLIGHTS	46
		ENDURA FLOOD SOLAR DOUBLE SENSOR	46
PRODUCTS		ENDURA FLOOD SOLAR SENSOR	48
SOLAR LUMINAIRES	10	ENDURA FLOOD SOLAR BUTTERFLY SENSOR	50
- SOLAR WALL & BOLLARD LUMINAIRES	12	ENDURA FLOOD SPLIT SOLAR SENSOR	52
ENDURA STYLE SOLAR SENSOR DOUBLE CIRCLE	12	ELECTRIFIED OUTDOOR LUMINAIRES	54
- SOLAR BOLLARD LUMINAIRES	14	- TABLE LUMINAIRES WITH INTEGRATED	
ENDURA STYLE SOLAR SENSOR		LED-MODULE	56
BOUQUET POST	14	ENDURA STYLE STAN TABLE CCT USB	56
- SOLAR WALL LUMINAIRES	16	- WALL & BOLLARD LUMINAIRES	
ENDURA STYLE SOLAR SENSOR FIN WALL	16	WITH INTEGRATED LED-MODULE	58
ENDURA STYLE SOLAR SENSOR		ENDURA STYLE BAT WALL	58
BRELLA WALL	18	ENDURA STYLE LANTERN MODERN	60
ENDURA STYLE SOLAR SENSOR TURN WALL	20	ENDURA STYLE CYLINDER	62
ENDURA STYLE SOLAR SENSOR SHORE WALL	22	- WALL LUMINAIRES WITH INTEGRATED LED-MODULE	64
ENDURA STYLE SOLAR UPDOWN WALL	24	ENDURA STYLE IVO WALL IP65	64
ENDURA STYLE SOLAR SENSOR DOWN WALL	26	ENDURA STYLE ILJA WALL IP65	66
ENDURA STYLE SOLAR SENSOR		ENDURA STYLE ILAY WALL IP65	68
ROBUST WALL	28	ENDURA STYLE IDRI WALL IP65	70
ENDURA STYLE SOLAR SENSOR		ENDURA STYLE IDAR WALL IP65	72
SINGLE CIRCLE WALL	30	ENDURA STYLE IHSAN WALL IP65	74
ENDURA STYLE SOLAR SENSOR GLOW WALL	32	ENDURA STYLE IVAN WALL IP65	76
ENDURA STYLE SOLAR SENSOR OVAL WALL	34	ENDURA STYLE NOVA WALL	78
ENDURA STYLE SOLAR SENSOR TOSSA WALL	36	ENDURA STYLE ROBUST WALL	80
ENDURA STYLE SOLAR QUADRO WALL	38	ENDURA STYLE ROBUST WALL USB	82
ENDURA STYLE SOLAR OXFORD WALL	40	ENDURA STYLE PLATE	84
ENDURA STYLE SOLAR SENSOR		ENDURA STYLE ADJUSTABLE BEAM	86
BRICKLUME WALL ENDURA GARDEN SOLAR SPOT	42	ENDURA STYLE ENTRANCE NUMBER	88
WALL & SPIKE	44		

	ENDURA STYLE DISC	90	ENDURA CLASSIC RADICK WALL	132
	ENDURA STYLE MINI SPOT	92	ENDURA CLASSIC ORBI WALL	134
	ENDURA STYLE MIDI SPOT	94	ENDURA CLASSIC ORBICK WALL	136
	ENDURA STYLE RING	96	ENDURA CLASSIC CUADRA WALL	138
	ENDURA STYLE SHIELD SQUARE	98	ENDURA CLASSIC ANGELA WALL	140
	ENDURA STYLE SPOT ROUND	100	ENDURA CLASSIC ERDA WALL	142
	ENDURA STYLE SQUARE	102	ENDURA CLASSIC TUBULAR WALL	144
	ENDURA STYLE UPDOWN DECO	104	ENDURA CLASSIC FRAME WALL	146
	ENDURA STYLE UPDOWN	106	ENDURA CLASSIC CASCADE AMBER WALL	148
	ENDURA STYLE UPDOWN PUCK	108	ENDURA CLASSIC TUBULAR WALL	150
	ENDURA STYLE WALL	110	ENDURA CLASSIC CALICE WALL SENSOR	152
	ENDURA STYLE WALL WIDE SENSOR	112	ENDURA CLASSIC LANTERN	
	ENDURA STYLE WIDE	114	CYLINDER WALL	154
_	GARDEN LUMINAIRES WITH INTEGRATED LED-MODULE ENDURA GARDEN FLOOD SPIKE	116 116	- SOCKETED WALL LUMINAIRES WITH GU10 SOCKET ENDURA CLASSIC ISIDOR WALL	156 158 158
-	CEILING LUMINAIRES WITH INTEGRATED LED-MODULE	118	ENDURA CLASSIC ITYS WALL	160
	OUTDOOR ESSENTIAL	118	ENDURA CLASSIC IVE WALL	162
-	SOCKETED WALL & BOLLARD LUMINAIRES	120	ENDURA CLASSIC CANNON UPDOWN WALL	164
	ENDURA CLASSIC EBRO	120	ENDURA CLASSIC BEAM WALL	166
	ENDURA CLASSIC CASCADE CLEAR	122	ENDURA CLASSIC CUBE ADJUST WALL	168
	ENDURA CLASSIC FRAME	124	ENDURA CLASSIC SQUARE WALL	170
	ENDURA CLASSIC POST	126	- SOCKETED GARDEN LUMINAIRES	172
	ENDURA CLASSIC TRADITIONAL ALU GOLD	128	ENDURA CLASSIC GARDEN SPOT	
_	SOCKETED WALL LUMINAIRES WITH E27 SOCKET	130	SPIKE GU10	172
	ENDURA CLASSIC RADO WALL	130		

CONTENT

FLOODLIGHTS	174
- FLOODLIGHTS WITH SENSOR	176
ENDURA FLOOD RECYCLED PLASTIC SENSOR COOL WHITE	176
ENDURA FLOOD RECYCLED PLASTIC	
SENSOR WARM WHITE	178
ENDURA PRO FLOOD SENSOR	180
ENDURA PRO SPOT SENSOR	182
FLOODLIGHT ESSENTIAL SENSOR HIGH WATTAGE COOL WHITE	184
FLOODLIGHT ESSENTIAL SENSOR COOL WHITE	186
FLOODLIGHT ESSENTIAL SENSOR	100
WARM WHITE	188
- FLOODLIGHTS WITHOUT SENSOR	190
ENDURA FLOOD RECYCLED PLASTIC COOL WHITE	190
ENDURA FLOOD RECYCLED PLASTIC WARM WHITE	192
ENERGY SAVOR A FLOODLIGHT	194
FLOODLIGHT ESSENTIAL HIGH WATTAGE COOL WHITE	196
FLOODLIGHT ESSENTIAL COOL WHITE	198
FLOODLIGHT ESSENTIAL WARM WHITE	200
- SENSOR	202
SENSOR CEILING 360DEG IP44	202
SENSOR WALL 110DEG IP44	204
SENSOR WALL 180DEG IP55	206
POS CONCEPTS	208
GLOSSARY	210





ENDURA STYLE SOLAR SENSOR DOUBLE CIRCLE Solar design that makes a statement – stylish, sensor-equipped lighting for entrances, balconies, and patios. Design: Solar-powered light with robust stainless-steel housing; ideal for entrances, terraces, or balconies. Sensors: Motion and daylight sensor for automatic control; three operating modes for flexible lighting. Protection class: IP44 protects against dust and splash water; suitable for covered outdoor areas. Installation: Easy-to-install stainless steel housing, resistant to weather influences. Light source: Integrated and non-replaceable; LED technology ensures energy-efficient, low-maintenance lighting.

ENDURA STYLE SOLAR SENSOR DOUBLE CIRCLE POST






Product colours






































Product name

GTI	N (EAN	























ENDURA Style Solar 40cm Post Sensor Double Circle 6W Stainless Steel	4099854 455469	1	Steel	Stainless steel	50 000	6.0	400	600	3 000	≥ 80	-	IP44
ENDURA Style Solar 40cm Post Sensor Double Circle 6W Black	4099854 455520	1	Black	Stainless steel	50 000	6.0	400	600	3 000	≥ 80		IP44
ENDURA Style Solar Wall Sensor Double Circle 6W Stainless Steel	4099854 455384	2	Steel	Stainless steel	50 000	6.0	400	600	3 000	≥ 80	-	IP44
ENDURA Style Solar Wall Sensor Double Circle 6W Black	4099854 455506	2	Black	Stainless steel	50 000	6.0	400	600	3 000	≥ 80	-	IP44


Product name		X NCL.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]	
ENDURA Style Solar 40cm Post Sensor Double Circle 6W Stainless Steel	12500	_	Not replaceable	n/a	Screws, Plastic dowels	_	_	400	178	4
ENDURA Style Solar 40cm Post Sensor Double Circle 6W Black	12500	-	Not replaceable	n/a	Screws, Plastic dowels	-	-	400	178	4
ENDURA Style Solar Wall Sensor Double Circle 6W Stainless Steel	12500	-	Not replaceable	n/a	Screws, Plastic dowels	185	178	220	-	4
ENDURA Style Solar Wall Sensor Double Circle 6W Black	12500	-	Not replaceable	n/a	Screws, Plastic dowels	185	178	220	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



























			•			AUTOMATIC /1				40/11/11/22		
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t[h] ²	W	оптрит 3	Im ught source	K	CRI		IP
ENDURA Style Solar Bouquet 50cm Post Sensor 6W Black	4099854 455650	1	Black	Aluminium	25 000	6.0	550	750	3000	> 80		IP44

Product name		X Not.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES PICLUDED	[mm]	W [mm]	(h)	Ø d [mm]	
ENDURA Style Solar Bouquet 50cm Post Sensor 6W Black	12500	-	Not replaceable	n/a	Screws, Plastic dowels	155	150	500	_	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours











Product name		X PROL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NELLOZO	[mm]	W [mm]	(<u>L</u>	Ø d [mm]	
ENDUDA OLI I OLI I OLI I DELLA	400000				0 21 11 1	450	50	150		
ENDURA Style Solar Sensor Wall Fin IP54	100 000	-	Not replaceable	-	Screws, Plastic dowels	158	50	150	-	


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA STYLE SOLAR SENSOR BRELLA WALL Solar efficiency meets modern outdoor lighting - state-of-the-art LED wall luminaire for sustainable and adaptive illumination. - Solar operation: Energy-efficient LED light with high-performance monocrystalline solar panel and rechargeable battery - no mains connection needed. - Sensor control: Integrated PIR motion sensor and daylight sensor in matching housing color; four customizable operating modes for optimized lighting. - Lighting: Bright, warm white, demand-based illumination with reduced light pollution and up to 18 days of runtime on a full Installation: Fast and hassle-free setup with included mounting kit; perfect for entrances, balconies, terraces, and building exteriors. Weatherproof: Robust design with IP54 protection for reliable use in outdoor environments.


18









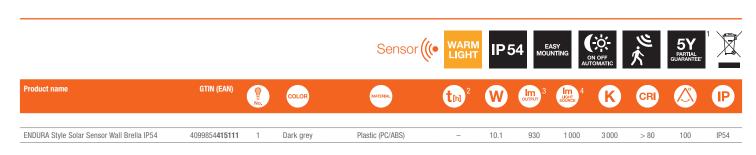


Product name		X O NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES PICLUOID	[mm]	W [mm]	(<u>L</u>	Ø d [mm]	a
ENDUDA Chula Calay Canaay Mall Dyalla IDE 4	100,000		Not replaceable		Carous Plantin dougle	160	200	100		
ENDURA Style Solar Sensor Wall Brella IP54	100 000	-	Not replaceable	-	Screws, Plastic dowels	162	209	100	-	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













				Sensor (((• LIGHT	IP5	4 MOUN	SY TING	ON OFF UTOMATIC	於	PARTIAL GUARANTEE	
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im LIGHT SOURCE	K	CRI		P
ENDURA Style Solar Sensor Wall Turn IP54	4099854 415135	1	Dark grey	Plastic (PC/ABS)		10.3	890	1 000	3 000	> 80	100	IP54

Product name		X PROL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUOED	[mm]	W [mm]	ţ <u>h</u>	Ø d [mm]	3
ENDURA Style Solar Sensor Wall Turn IP54	100 000	_	Not replaceable	_	Screws,Plastic dowels, Mounting equipment	107	115	149	_	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



283





Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NELLODED	[mm]	W [mm]	(<u>h</u>	Ø d [mm]	
ENDURA Style Solar Sensor Wall Shore IP54	100 000	-	Not replaceable	-	Screws,Plastic dowels	283	62	50	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









Product name		NCT-	MODULE MODULE MEGANTO	COMNECTOR	ACCES- SORIES MILLIONES		W	(<u>L</u>	Ø d [mm]	
ENDURA Style Solar Updown W DS IP44	100 000	-	Not replaceable	-	Screws,Plastic dowels, Mounting equipment	178	42	63	-	6
ENDURA Style Solar Updown W DS IP65	100 000		Not replaceable		Screws,Plastic dowels, Mounting equipment	175	124	50	-	6

^{* 4099854415210 | ** 4099854415234}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




ENDURA STYLE SOLAR SENSOR DOWN WALL

Efficient solar LED outdoor luminaire for lasting performance and flexibility.

- Solar operation: LED fixture with high-efficiency monocrystalline solar module and rechargeable battery - no external power supply required.
- Installation: Easy and fast mounting with included hardware - perfect for entrances, balconies, terraces, and outdoor
- Sensor control: Integrated PIR motion and daylight sensor, color-matched to the housing, for intelligent, needs-based lighting.
- Operating modes: Four selectable options 100%, 25%, 10% with motion boost, or off with motion-triggered full brightness
- Lighting: Bright, energy-conscious illumination with reduced light pollution for comfortable and targeted outdoor lighting.
- Performance: Up to 18 days of runtime on a full charge, depending on environmental conditions and selected mode.
- Weatherproof: Durable IP54-rated housing for reliable operation in outdoor conditions.












Product name		X Noct.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES PICLUDED		W	(h	Ø d [mm]	
ENDURA Style Solar Sensor Wall Down IP65	100 000	-	Not replaceable	-	Screws,Plastic dowels, Mounting equipment	121	152	56	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name		X NOL =	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUED	[mm]	W	(h)	Ø d [mm]	
ENDURA Style Solar Robust Sensor Wall IP54 USB Dark Grey	50 000	-	Not replaceable	-	Screws,Plastic dowels,USB cable	206	88	86	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X Note 1	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Style Solar Wall Sensor Single Circle 6W Black	12 500	_	Not replaceable	n/a	Screws, Plastic dowels	200	160	70	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ENDURA STYLE SOLAR SENSOR GLOW WALL


This sensor-equipped wall light brings atmosphere and autonomy to your outdoors. Let the sun do the work!

- Can be used without power: Equipped with a solar panel for operation in areas lacking electrical access, featuring an efficient integrated sensor.
- Durable: Offers a significant burn time of 60 times
 30 seconds in PIR mode, with a battery recharge time of just 8 hours.
- Long life: The solar wall light has a lifespan of up to 25,000 hours, making it both a long-lasting and energy-efficient solution.
- Versatile: Ideal for various outdoor settings, perfect for illuminating house facades, garages, and entrance areas.
- IP44 protection: Designed for the outdoors, safeguarded against moisture and splash water ingress from all sides.





Product sizes (in mm)



80

















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Іт 3	Im 4 ught source	K	CRI		P
ENDURA Style Solar Glow Wall Sensor 3.6W 3000K	4099854 455674	1	Dark gray	Aluminium/Plastic (PC)	25 000	3.6	180	420	3000	≥ 80	-	IP44


Product name		INCL.	LED MODULE WITEGRATED	CONNECTOR	ACCES- SORIES ROLLUED	[mm]	W [mm]	Þ	Ø d [mm]	
ENDURA Style Solar Glow Wall Sensor 3.6W 3000K	12500	-	Not replaceable	n/a	Screws, Plastic dowels	160	177	80	-	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	Іт 3	lm 4 source 4	K	CRI		IP
ENDURA Style Solar Oval S Wall Sensor 4W 3000K	4099854 455759	1	Black	Aluminium	25 000	4.0	380	400	3 000	≥ 80	_	IP44
ENDURA Style Solar Oval Wall Sensor 6W 3000K	4099854 455711	1	Black	Aluminium	25 000	6.0	540	550	3 000	≥ 80	-	IP44
ENDURA Style Solar Oval Wall Sensor 6W 4000K	4099854 455735	1	Black	Aluminium	25 000	6.0	540	550	4000	≥ 80	-	IP44

Product name		X INGL =	LED MODULE ATTERATED	CONNECTOR	ACCES- SORIES ROCLUPED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Solar Oval S Wall Sensor 4W 3000K	12500	_	Not replaceable	n/a	Screws, Plastic dowels	200	124	45	_	4
ENDURA Style Solar Oval Wall Sensor 6W 3000K	12500	-	Not replaceable	n/a	Screws, Plastic dowels	340	125	60	-	4
ENDURA Style Solar Oval Wall Sensor 6W 4000K	12500	-	Not replaceable	n/a	Screws, Plastic dowels	340	125	60	-	4

^{* 4099854455735 | ** 4099854455711; 4099854455759}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




ENDURA STYLE SOLAR SENSOR TOSSA WALL

Minimalist outside, intelligent inside. A solar-powered wall light designed for modern facades and peaceful evenings.

- Can be used without power: Equipped with a solar panel for operation in areas lacking electrical access, featuring an efficient integrated sensor.
- Durable: Offers up to 8 hours of lighting per charge, with a battery recharge time of 12 hours.
- Long life: Up to 25,000 hours of energy-saving, long-lasting performance.
- Versatile: Perfect for various outdoor settings, including house facades, garages, and entrance areas.
- IP44 protection: Ideal for outdoor use, featuring moisture-proof protection against splash water.











Product name		X Noc.	LED MODULE NYTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Solar Tossa Wall Sensor 6W 3000K	12500	_	Not replaceable	n/a	Screws, Plastic dowels	160	173	50	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	оптьп 3	Im ught source	K	CRI		IP
ENDURA Style Solar Wall Quadro Dark Grav	4099854 455810	1	Dark gray	Stainless steel	25 000	0.5	50	80	3 000	≥ 80	120	IP44


Product name		X Noch E	MODULE SYTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h.	Ø d [mm]	a
ENDUDA OLI I OLI IVIII OLI II DILIO	10.500			,				445		
ENDURA Style Solar Wall Quadro Dark Gray	12500		Not replaceable	n/a	Screws, Plastic dowels	85	110	115		_

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
















Product name		X NOCL.	LED MODULE SYTEGRATED	CONNECTOR	ACCES- SORIES POCLUPED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Solar Wall Oxford Dark Gray	12500	_	Not replaceable	n/a	Screws, Plastic dowels	81	115	115	_	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



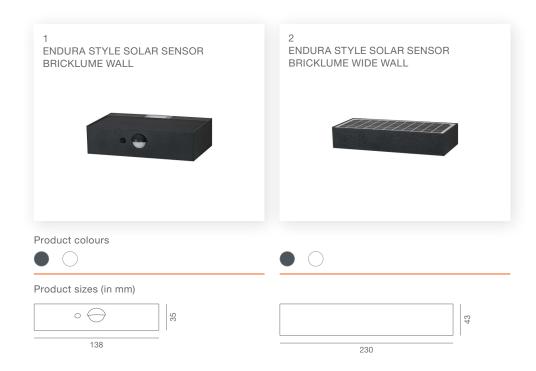




97

230

43

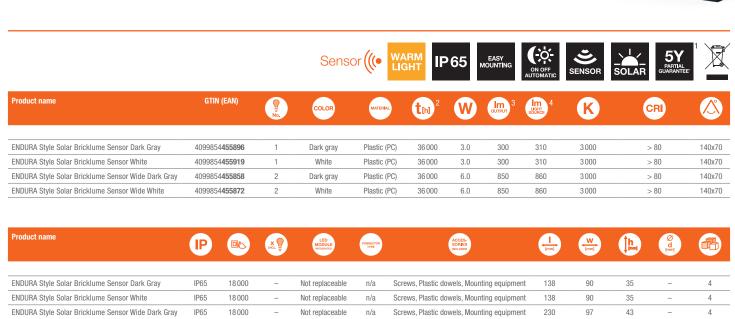

n/a

Screws, Plastic dowels, Mounting equipment


Not replaceable

IP65

18000

ENDURA Style Solar Bricklume Sensor Wide White

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

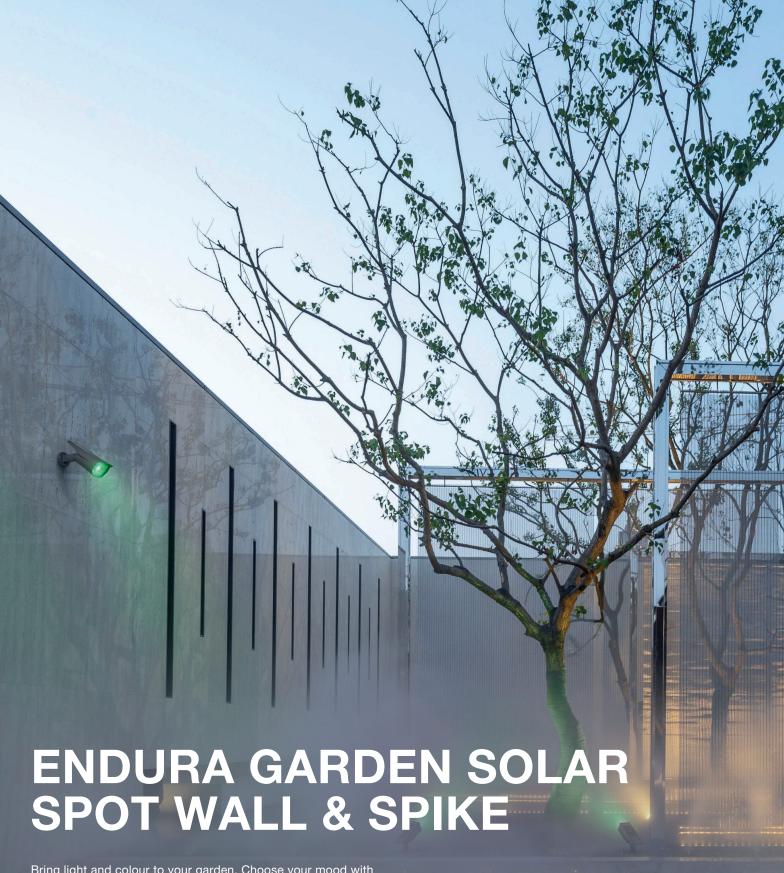


Bring light and colour to your garden. Choose your mood with vibrant RGB, soft white or both.

- Operating modes: Three lighting options RGB colour change, fixed colour or warm white for varied garden moods.
- Solar operation: Powered by an efficient solar module with daylight sensor for automatic lighting at dusk.
- Installation: Includes both wall mount and ground spike for easy setup in paths, terraces or flower beds.
- Weatherproof: Durable polycarbonate housing with IP44 protection and shock resistance.
- Powerful: Energy-saving LED technology combined with a strong battery for long-lasting performance.











Product name		NCL.	MODULE MTEGRATED	CONNECTOR	ACCES- SORIES NOLUMES	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Garden Solar Spot Wall + Spike RGB + W	_	_	Not replaceable	n/a	Screws, Plastic dowels, Batteries, Ground spike	175	92	295	_	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA FLOOD SOLAR DOUBLE SENSOR Bright when it counts. A solar-powered floodlight built for resilience and reliable lighting after dark. - Solar powered: Equipped with a built-in sensor, this solar-powered LED floodlight can also be used where no power is available. Long life: Offers an extended lifespan of up to 25,000 hours, providing luminous intensity while being energy-efficient. - Long runtime: Reliable battery life lasts up to four hours at full brightness, with an intelligent lighting mode extending to eight hours. Versatile: Powerful outdoor floodlighting ideal for gardens, driveways, and other exterior areas needing strong light. Weatherproof: IP44-rated, suitable for outdoor areas, replaces halogen floodlights.



Product colours












Product name		X P	MODULE NTEGGATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ø d [mm]	3
ENDURA Flood Solar Double Sensor 2 W 3000 K	12500	-	Not replaceable	n/a	Screws, Plastic dowels	160	110	172	-	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser


























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im ught source	K	CRI		IP
ENDURA Flood Solar 10 W 4000 K	4099854 429477	1	Black	Metal	36 000	10.0	1 200	1 250	4000	≥ 80	95	IP65

Product name		X O	MODULE MIEGANI ED	CONNECTOR	ACCES- SORIES NICLUSED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Flood Solar 10 W 4000 K	36 000		Not replaceable	n/a	Remote control	194	67	313		4
ENDUNA FIUUU SUIAI TU W 4000 K	30000		NULTEPIACEADIE	II/d	nemote control	194		313		4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

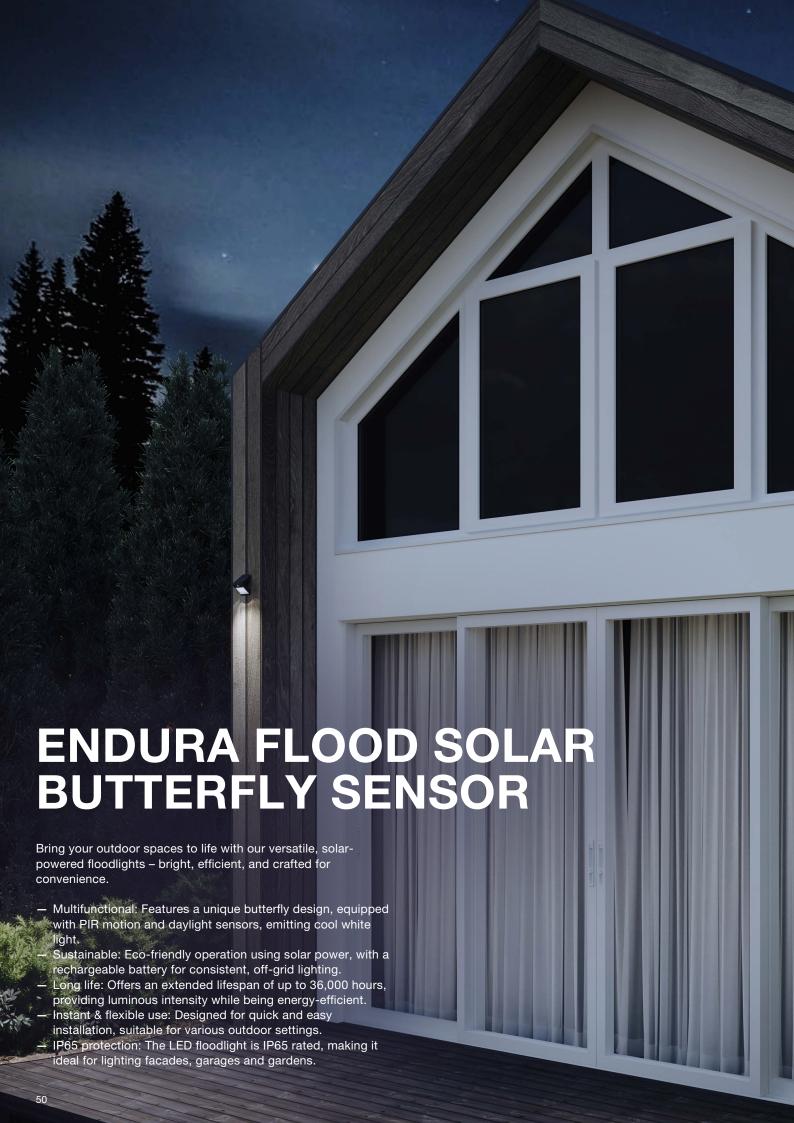

































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		P
ENDURA Flood Butterfly Solar Sensor 1.5W	4099854 429392	1	Black	Plastic	36 000	1.5	220	230	4000	> 80	90	IP65
ENDURA Flood Butterfly Solar Sensor 4W	4099854 429378	2	Black	Plastic	36 000	4.0	500	510	4000	> 80	90	IP65


Product name		X Not.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES	[mm]	W [mm]	(h)	Ø d [mm]	
ENDURA Flood Butterfly Solar Sensor 1.5W	10 000		Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	96	79	145		8
ENDURA Flood Butterfly Solar Sensor 4W	10 000	_	Not replaceable	n/a	Screws, Plastic dowels, Mounting equipment	140	115	211	-	8


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser































										1
No.	COLOR	MATERIAL	t M ²	W	lm 3	LIGHT 4	K	CRI		P
1	Black	Acrylonitrile butadiene styrene (ABS)	35 000	10	1400	- 4	1000	> 80	120 × 60	IP65
	1	1 Black								

Product name		X P	MODULE MYZGRAYED	CONNECTOR	ACCES- SORIES ROLLOTO	[mm]	W	(h	Ø d [mm]	
ENDURA Flood Split Solar Sensor 10W 840 Remote control	10000	-	Not replaceable	-	Mounting screws, Plastic dowels, Remote control	153	31	147	-	8
ENDURA Flood Split Solar Sensor 30W 840 Remote control	10000	_	Not replaceable	-	Mounting screws, Plastic dowels, Remote control	200	49	191	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ELECTRIFIED OUTDOOR LUMINAIRES










Product colours























EE.	

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Іт 3	Im 4	K	CRI
ENDURA Style Table CCT USB Beige	4099854 445132	1	Beige	Aluminium/Plastic (ABS)	50 000	2.5	200	280	2700/4000/6500	> 80
ENDURA Style Table CCT USB Dark Gray	4099854 445200	1	Dark gray	Aluminium/Plastic (ABS)	50 000	2.5	200	280	2700/4000/6500	> 80
ENDURA Style Table CCT USB Magenta	4099854 445224	1	Magenta	Aluminium/Plastic (ABS)	50 000	2.5	200	280	2700/4000/6500	> 80


Product name		IP		NCL. ≡	LED MODULE NTGGRATED	CONNECTOR	ACCES- SORIES NELLUCTO	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Table CCT USB Beige	100	IP54	100 000		Not replaceable	USB	USB-C cable	_	_	300	110	4
ENDURA Style Table CCT USB Dark Gray	100	IP54	100 000	-	Not replaceable	USB	USB-C cable	-	-	300	110	4
ENDURA Style Table CCT USB Magenta	100	IP54	100 000	-	Not replaceable	USB	USB-C cable	_	-	300	110	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOCLUBED	[mm]	W	(þ.	Ø d [mm]	
ENDURA Style Bat Wall	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	177	169	84	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




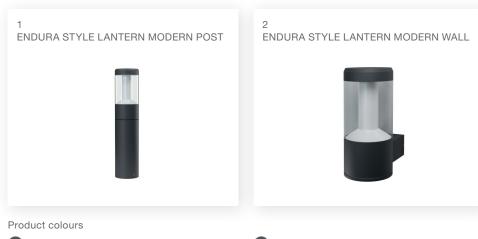




























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Lantern Modern 50cm 12W	4099854 453373	1	Dark gray	Aluminium	30 000	12.0	610	900	3 000	> 80	360	IP44
ENDURA Style Lantern Modern 90cm 12W	4099854 453434	1	Dark gray	Aluminium	30 000	12.0	610	900	3 000	> 80	360	IP44
ENDURA Style Lantern Modern Wall 12W	4099854 453335	2	Dark gray	Aluminium	30 000	12.0	610	900	3 000	> 80	360	IP44

Product name		X PRGL.	MODULE MICHANIE	CONNECTION TYPE	ACCES- SORES NOLUSED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Lantern Modern 50cm 12W	15 000	_	Not replaceable	Screw terminal	Screws, Allen wrench, Base	_	_	500	110	2
ENDURA Style Lantern Modern 90cm 12W	15 000	-	Not replaceable	Screw terminal	Screws, Allen wrench, Base	-	-	900	110	2
ENDURA Style Lantern Modern Wall 12W	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	176	110	240	_	4

^{* 4099854453373 | ** 4099854453434}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Cylinder 50cm 6W	4099854 453106	1	Steel	Stainless steel	30 000	6.0	360	660	3 000	> 80	_	IP44
ENDURA Style Cylinder Wall Sensor 6W	4099854 453267	2	Steel	Stainless steel	30 000	6.0	360	660	3 000	> 80	-	IP44

Product name		X INCL.	LED MODULE NTEGGNIED	CONNECTOR	ACCES- SORIES N°LLUGED	[mm]	W [mm]	(<u>h</u>	Ø d [mm]	
ENDURA Style Cylinder 50cm 6W	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels	102	102	500	101	2
ENDURA Style Cylinder Wall Sensor 6W	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels	150	101	137	102	6

^{* 4099854453106 | ** 4099854453267}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X ☐ INGL =	MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES NCLUDED	[mm]	W	(h	Ø d [mm]	
ENDURA Style IP65 Wall Ivo Dark Gray	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	240	41	80	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












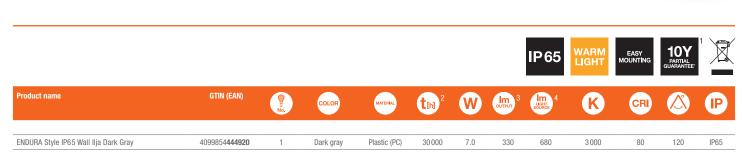

Product name		X ()	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES PICLUOED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style IP65 Wall IIja Dark Gray	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	200	40	125	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ENDURA STYLE ILAY WALL IP65

Elegant curves with powerful output. A reliable and stylish solution for inviting outdoor lighting.

- Pleasant lighting: Warm white light creates a cozy ambience, ideal for outdoor evenings with family and friends.
- Easy installation: Quick setup ensures immediate and stress-free enjoyment.
- Versatile: Weatherproof and durable for reliable use in any outdoor area.
- IP65 protection: Provides high resistance to moisture and dust ingress.
- Decorative design: Adds visual interest and functional brightness to any facade or entryway.











Product name		X PINGL =	MODULE MITEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h	Ø d [mm]	
ENDURA Style IP65 Wall Ilay Dark Gray	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	172	46	82	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












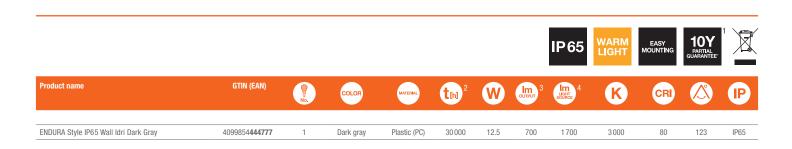

Product name		X NOCL =	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUOED	[mm]	W	(h	Ø d [mm]	
ENDURA Style IP65 Wall Idri Dark Gray	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	230	90	101	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA STYLE IDAR WALL IP65 Clean lines and warm light come together in this durable outdoor wall luminaire, designed to elevate outdoor ambience. Pleasant lighting: Warm white tone creates a cozy, inviting atmosphere outdoors. Easy installation: Quick setup ensures immediate and stress-free enjoyment. Versatile: Robust and weather-resistant, ideal for various outdoor applications. IP65 protection: Provides reliable protection against weather conditions, ideal for outdoor use. Decorative design: Combines aesthetics and functionality to give outdoor areas a stylish atmosphere.

72



Product colours











Product name		X P	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES PRELIMOTED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Style IP65 Wall Idar Dark Gray	15 000		Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	113	51	220		4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours









											GUARANTEE	
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style IP65 Wall Ihsan Dark Gray	4099854 444838	1	Dark gray	Plastic (PC)	30 000	11.0	550	12 000	3 000	80	205	IP65

Product name		X P	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NECLUCED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style IP65 Wall Ihsan Dark Gray	15 000	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	170	140	170	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA STYLE IVAN WALL IP65

This wall light adds understated charm to outdoor walls while offering dependable performance.

- Pleasant lighting: Warm white light creates a soft, welcoming atmosphere for relaxing outdoor evenings.
- Easy installation: Quick and stress-free setup, enjoy excellent lighting within minutes.
- Versatile: Robust and weather-resistant, ideal for various outdoor applications.
- IP65 protection: Offers strong protection against weather conditions for reliable outdoor use.
- Decorative design: Combines aesthetics and functionality to give outdoor areas a stylish atmosphere.











Product name		X P	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h	Ø d [mm]	
ENDURA Style IP65 Wall Ivan Dark Gray	15 000	-	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	230	27	80	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser










267



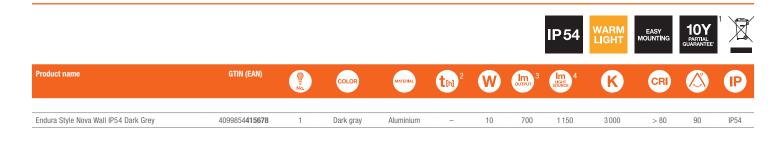

Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h	Ø d [mm]	
Endura Style Nova Wall IP54 Dark Grey	50 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Mounting equipment	267	77	105	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA STYLE ROBUST WALL Modern lighting meets robust design - versatile LED fixture with optional motion and daylight sensor. Sensor option: Available with integrated PIR motion detector and daylight sensor, perfectly color-matched to the housing for seamless appearance. Energy-efficient: LED technology ensures bright, warm white illumination with low power consumption and significant long-term savings in sensor-equipped versions. Applications: Ideal for outdoor areas including entrances, balconies, terraces, general lighting, and facade enhancement. Durability: Sturdy aluminium housing combined with an opal polycarbonate diffuser for even, glare-free light distribution. Weatherproof: Rated IP54 to reliably withstand outdoor environments.







Product name		X I	MODULE WITGOAFTO	CONNECTOR	ACCES- SORIES NELLIDED	[mm]	W	(h	Ø d [mm]	
Endura Style Robust Wal IP54 Dark Grey	50 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Mounting equipment	206	88	86	-	6
Endura Style Robust Wall Sensor IP54 Dark Grey	50 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws,Plastic dowel, Mounting equipment	206	88	86	-	6


^{* 4099854415753}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser













Product name		X Not.	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ød	
Endura Style Robust Sensor Wall IP54 USB Dark Grey	50 000	_	Not replaceable	-	Screws,Plastic dowels,USB cable	206	88	86		6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



operating costs low.

Energy efficient: LED technology keeps energy use and



































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Plate Wall 12W	4099854 461576	1	Steel	Steel	25 000	12.0	650	1 500	3 000	≥ 80	108	IP44
ENDURA Style Plate Wall Sensor 12.5W	4099854 461675	2	Steel	Steel	25 000	12.5	650	1 500	3 000	≥ 80	108	IP44
ENDURA Style Plate Wall 12.5W Dark Grey	4099854 510137	1	Dark grey	Stainless steel	_	12.0	600	1 500	3 000	≥ 80	108	IP44
ENDURA Style Plate Wall Sensor 12.5W Dark Grey	4099854 510151	2	Dark grey	Stainless steel	_	12.5	630	1 500	3 000	≥ 80	108	IP44

Product name		X INGL	MODULE NYTGOATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h)	Ø d [mm]	
ENDURA Style Plate Wall 12W	12500	_	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	54	180	280	_	4
ENDURA Style Plate Wall Sensor 12.5W	12500	-	Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	60	180	283	-	4
ENDURA Style Plate Wall 12.5W Dark Grey	12500		Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	54	180	280	-	4
ENDURA Style Plate Wall Sensor 12.5W Dark Grey	12500		Not replaceable	Terminal, 2-Pole (L, N)	Screws, Plastic dowels	60	180	283	-	4

^{* 4099854461675, 4099854510151 | ** 4099854510151}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours











Product name		X NOIL =	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NELLUMED	[mm]	W	(h)	Ø d [mm]	
ENDURA Style Adjustable Beam Sensor USB Dark Gray	100 000	-	Not replaceable	USB	Screws, Plastic dowels, USB-C cable	100	97	126	-	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

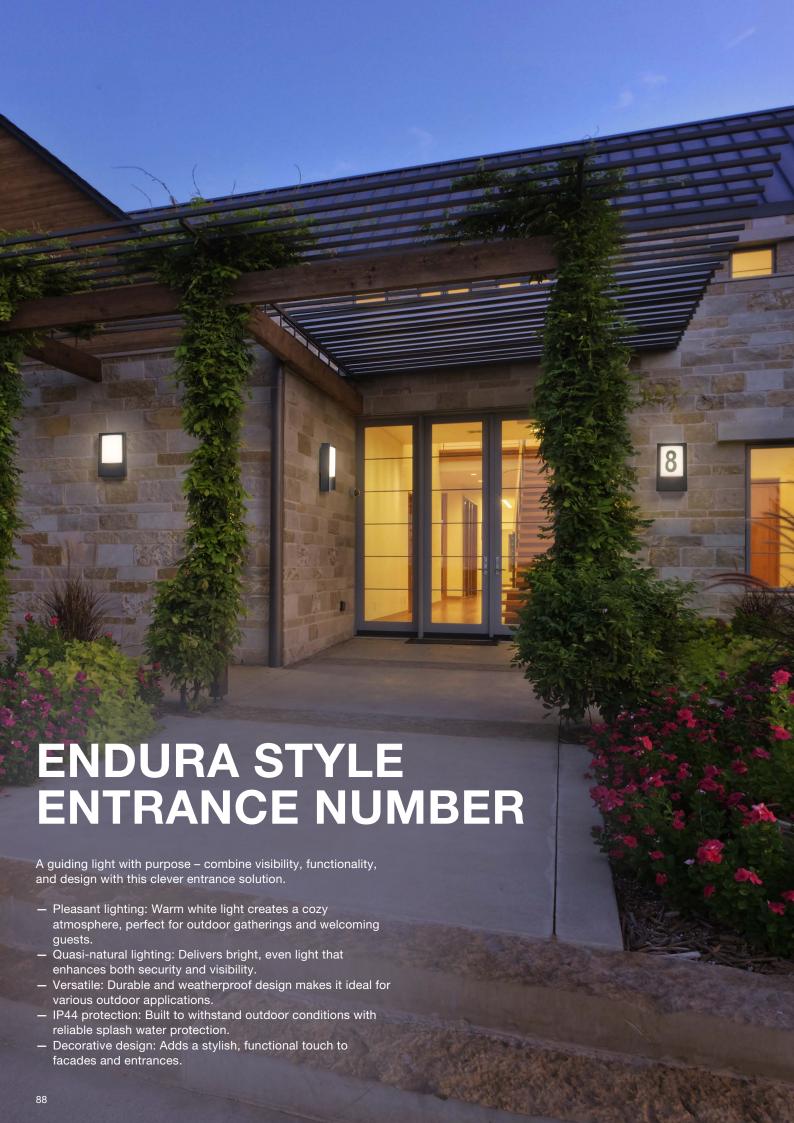



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптьпт 3	Im ught source	K	CRI		IP
ENDURA Style Entrance Dark Gray	4099854 444371	1	Dark gray	Aluminium/Plastic (ABS)	50 000	12.5	900	1 650	3 000	> 80	110	IP44
ENDURA Style Entrance Sensor Dark Gray	4099854 444432	1	Dark gray	Aluminium/Plastic (ABS)	50 000	13.0	900	1 650	3 000	> 80	110	IP44

Product name		X PRGL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h	Ø d [mm]	
ENDURA Style Entrance Dark Gray	100 000	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	150	62	235	_	4
ENDURA Style Entrance Sensor Dark Gray	100 000	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	150	62	235	-	4

^{* 4099854444432}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser









Product colours





Product sizes (in mm)





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Disc Wall 8W	4099854 461453	1	Steel	Stainless steel	25 000	8.0	370	850	3 000	≥ 80	_	IP44
ENDURA Style Disc Wall Sensor 8W	4099854 461439	2	Steel	Stainless steel	25 000	8.0	370	850	3000	≥ 80	-	IP44

Product name		X Not.	LED MODULE INTEGRATED	CONNECTION TYPE	ACCES- SORIES INCLUDED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Style Disc Wall 8W	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	_	_	60	200	4
ENDURA Style Disc Wall Sensor 8W	12500		Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	244	200	60	_	4

^{* 4099854461439}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ENDURA STYLE MINI SPOT

Compact and versatile – ideal for precise lighting around entrances, terraces and facades with a rotatable head and sleek design.

- Bright and functional: Very bright LED light provides optimal lighting for entrances and outdoor areas.
- Robust housing: Die-cast aluminium housing ensures durability and weather resistance.
- Flexible mounting: Available as wall and bollard versions with a 340° rotatable head for directional lighting.
- Energy-efficient: Uses modern LED technology to save energy without sacrificing brightness.
- Weatherproof: IP44 protection makes it ideal for outdoor use in gardens, driveways, and terraces.

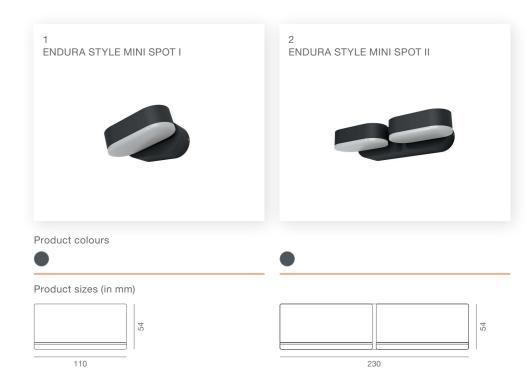





Product name		X O	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES RELICED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Mini Spot I 8W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	100	110	54	_	6
ENDURA Style Mini Spot II 13.5W Dark Gray	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	100	230	54	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours









Product name		X PICL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ø d [mm]	a
ENDURA Style Midi Spot I 13.5W	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	162	125	128	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



- Robust housing: Die-cast aluminium ensures lasting durability.
- Flexible choice: Available in two housing colours to suit different outdoor settings.
- Energy-efficient: LED technology delivers high brightness with low energy use.
- Weatherproof: IP44 protection makes it suitable for terraces and facades.



Product colours









Product name		X ()	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Style Ring 13.5W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels	202	202	45	202	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



ENDURA Style Shield Square 11W Dark Gray

4099854**461873**





30 000

10.5

410

1150

3 000

> 80

IP44

Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h	Ø d [mm]	
ENDURA Style Shield Square 11W Dark Gray	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	60	240	142	-	6

Aluminium

Dark gray


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA STYLE SPOT ROUND Flexible, direct lighting with customisable colour temperature, perfect for damp interiors or sheltered outdoor areas.

- Flexible: Adjustable lamp heads for personalised light direction in any space.
- Lighting: LED wall light with direct, warm white illumination – ideal for facades, balconies, and entrances.
- Robust: IP44 protection makes it suitable for use in humid environments such as bathrooms.
- Practical: Quick and easy installation with included mounting and connection accessories.
- Application areas: Ideal for indoor walls or ceilings, especially in humid rooms.



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im 4	K	CRI		P
ENDURA Style Spot Round 8W Dark Gray	4099854 453533	1	Dark gray	Aluminium	30 000	8.0	440	750	3 000	> 80	-	IP44

Product name		X O	LED MODULE INTEGRATEO	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h)	Ø d [mm]	
ENDURA Style Spot Round 8W Dark Gray	12500	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	135	90	140	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Style Square 13.5W Dark Gray	4099854 461958	1	Dark gray	Aluminium	30 000	13.5	480	1 450	3 000	> 80	100	IP44
ENDURA Style Square 13.5W White	4099854 461996	1	White	Aluminium	30 000	13.5	600	1 450	3 000	> 80	100	IP44

Product name		X P	LED MODULE WTEGOVIE	CONNECTOR	ACCES- SORIES NULLIDED	[mm]	W	(h	Ø d [mm]	
ENDURA Style Square 13.5W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels	202	202	45	_	6
ENDURA Style Square 13.5W White	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels	202	202	45	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours









Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NELLOZZO	[mm]	W	(h	Ø d [mm]	6
ENDURA Style UpDown Deco II 11W Dark Gray	100 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	50	140	130	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im ught source	K	CRI		IP
ENDURA Style UpDown 12W Dark Gray	4099854 453731	1	Dark gray	Aluminium	30 000	12.0	700	1 050	3 000	> 80	100	IP44
ENDURA Style UpDown 12W White	4099854 453830	1	White	Aluminium	30 000	12.0	700	1 050	3 000	> 80	100	IP44
ENDURA Style UpDown 12W Aluminium	4099854 453618	1	Aluminium	Aluminium	30 000	12.0	700	1 050	3 000	> 80	100	IP44

Product name		X PROL.	MODULE MICHANIE	CONNECTOR	ACCES- SORIES NECUSER	[mm]	W	(h	Ø d [mm]	
ENDURA Style UpDown 12W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	55	90	160	_	6
ENDURA Style UpDown 12W White	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	55	90	160	-	6
ENDURA Style UpDown 12W Aluminium	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	55	90	160	_	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




















Product name		X O	MODULE MITEGRATED	CONNECTOR TYPE	ACCES- SORIES HULLIOID	[mm]	W	(h	Ø d [mm]	
ENDURA Style UpDown Puck 13W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	131	91	110	_	6
ENDURA Style UpDown Puck 13W White	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	131	91	110	_	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	Im 3	Im ught source	K	CRI		P
ENDURA Style Wall IP54 12W Dark Gray	4099854 453878	1	Dark grav	Aluminium	30 000	12.0	740	950	3 000	≥ 80	107	IP44
ENDURA Style Wall Sensor IP54 12W Dark Gray	4099854 453939	1	Dark gray	Aluminium	30 000	12.0	740	950	3 000	≥ 80	107	IP44

Product name		X Prot.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Wall IP54 12W Dark Gray	15 000		Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	168	100	273		4
ENDURA Style Wall Sensor IP54 12W Dark Gray	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	168	100	273	-	4

^{* 4099854453939}


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours









Product name		X P	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES WICLION	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Style Wall Wide Sensor 12W Dark Gray	15 000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	118	176	212	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




A strong presence on your outdoor wall. For welcoming entranceways and bright, functional facade lighting.

- Bright and functional: Strong LED output with modern light technology, perfect for outdoor use.
- Robust housing: Die-cast aluminium construction ensures strength and durability.
- Flexible choice: Available in two housing colours for better integration with surroundings.
- Energy efficient: LED lighting ensures high brightness with low power consumption.
- Weatherproof: IP44 rated for outdoor lighting on facades and entryways.























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im ught source	K	CRI		P
ENDURA Style Wide 12W Dark Gray	4099854 462139	1	Dark gray	Aluminium	30 000	12.0	530	1 220	3 000	> 80	115	IP44
ENDURA Style Wide 12W White	4099854 462153	1	White	Aluminium	30 000	12.0	530	1 220	3 000	> 80	115	IP44

Product name		X PICL.	LED MODULE MIEGRATED	CONNECTOR	ACCES- SORIES NELLUCIO	[mm]	W	(h	Ø d [mm]	
ENDURA Style Wide 12W Dark Gray	15 000	_	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	86	210	90	_	6
ENDURA Style Wide 12W White	15000	-	Not replaceable	Screw terminal	Screws, Plastic dowels, Allen wrench	86	210	90	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Garden Flood Spike 10W 3000K	4099854 585838	1	Dark gray	Aluminium	25 000	10.0	800	820	3 000	≥ 80	120	IP65
ENDURA Garden Flood Spike 20W 3000K	4099854 585852	1	Dark gray	Aluminium	25 000	20.0	1700	1750	3000	≥ 80	120	IP65

Product name		X O	LED MODULE NTEGRATED	CORRECTOR	ACCES- SORIES NOLLIED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Garden Flood Spike 10W 3000K	15 000	_	Not replaceable	Protective contact Plug type	Ground spike, Allen wrench	44	108	292	_	8
ENDURA Garden Flood Spike 20W 3000K	15 000	_	Not replaceable	Protective contact Plug type	Ground spike, Allen wrench	44	133	323	_	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colours


















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im ught source	K	CRI		IP
Outdoor Essential 255mm 18W 830 White	4099854 445309	1	White	Steel	20 000	18	1350		3 000	> 80	120	IP44
Outdoor Essential 325mm 24W 830 White	4099854 445361	1	White	Steel	20 000	24	1 800		3000	> 80	120	IP44

Product name		X PICL.	LED MODULE INTEGRATED	CORRECTOR	ACCES- SORIES INCLUDED	[mm]	W	(þ.	Ø d [mm]	
Outdoor Essential 255mm 18W 830 White	20 000		_	Cable, 2-pole	Screws, Plastic dowels	-	_	70	255	8
Outdoor Essential 325mm 24W 830 White	20 000	-	_	Cable, 2-pole	Screws, Plastic dowels	-	_	72	325	5

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



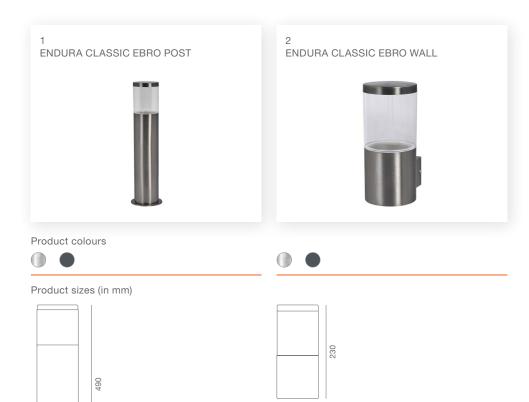

101



130

490

230

230

145

145

				IP4	4 E	27	MAX. 12W LED	LAMP NOT INCLUDED	STAINLESS STEEL	EASY MOUNTING	5Y GUARANTEE	
Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im UGHT SOURCE	K	CRI		IP
ENDURA Classic Ebro 49cm E27 Stainless Steel	4099854 446436	1	Steel	Stainless steel	_			_			_	IP44
ENDURA Classic Ebro 49cm E27 Dark Gray	4099854 446313	1	Dark gray	Stainless steel	-	_	_	-	-	_	-	IP44
ENDURA Classic Ebro Wall E27 Stainless Steel	4099854 446658	2	Steel	Stainless steel	-	_	_	-	_	_	-	IP44
ENDURA Classic Ebro Wall E27 Dark Gray	4099854 446535	2	Dark gray	Stainless steel	-	-	-	-	_	-	-	IP44
Product name	INCL.	LED MODULE INTEGRATED		CORPECTOR TYPE		ACCES- SORIES INCLUDED		[mm]	W	(h)	Ø d [mm]	
ENDURA Classic Ebro 49cm E27 Stainless Steel		_	Termina	ıl, 3-Pole (L, N, PE)	Screv	vs, Plastic do	owels	_	_	490	130	4

Terminal, 3-Pole (L, N, PE)

Terminal, 3-Pole (L, N, PE)

Terminal, 3-Pole (L, N, PE)

Screws, Plastic dowels

Screws, Plastic dowels

Screws, Plastic dowels

101

101

ENDURA Classic Ebro 49cm E27 Dark Gray

ENDURA Classic Ebro Wall E27 Dark Gray

ENDURA Classic Ebro Wall E27 Stainless Steel

ø130

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser
































Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	оптрит 3	ught source	K	CRI		IP
ENDURA Classic Cascade Wall E27 Clear	4099854 461200	1	Dark gray	Aluminium	_	_	_	_	-	_		IP44
ENDURA Classic Cascade 50cm Post E27 Clear	4099854 460937	2	Dark gray	Aluminium	-	-	-	-	-	-	-	IP44
ENDURA Classic Cascade 80cm Post E27 Clear	4099854 461033	2	Dark gray	Aluminium	_	-	-	_	-	_	_	IP44


Product name		X Proct.	MODULE NYTEOPATED	conscion five	ACCES- SORIES NICLUSED	[mm]	W	(h	Ø d [mm]	3
ENDURA Classic Cascade Wall E27 Clear	_	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	160	120	180	-	4
ENDURA Classic Cascade 50cm Post E27 Clear	-	-	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	160	500	_	2
ENDURA Classic Cascade 80cm Post E27 Clear	_	-	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	200	160	800	_	2


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	LIGHT SOURCE 4	K	CRI		P
ENDURA Classic Frame 60cm Post E27	4099854 452024	1	Dark gray	Aluminium					_			IP44
ENDURA Classic Frame Wall E27	4099854 452048	2	Dark gray	Aluminium		-	_	_	-	_	-	IP44

Product name		X ()	LED MODULE SYTEGRATED	CONNECTOR	ACCES- SORIES NOLLOGIO	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Classic Frame 60cm Post E27			_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	110	110	600		2
ENDURA Classic Frame Wall E27	_	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	140	110	245	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser










ENDURA CLASSIC POST DOWN WALL


Product colours






























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im 4	K	CRI		IP
ENDURA Classic Post 55cm E27	4099854 452239	1	Steel	Stainless steel		_	_	_	-	_	_	IP44
ENDURA Classic Post Sensor Up E27	4099854 452291	2	Steel	Stainless steel	_	-	_	_	-	-	-	IP44
ENDURA Classic Post Down E27	4099854 452260	3	Steel	Stainless steel	_	-	_	_	-	_	-	IP44

Product name		X PICL.	LED MODULE NTEGRATED	COMMECTOR	ACCES- SORIES MCLUMD	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Classic Post 55cm E27	_	_	_	Screw terminal	Screws, Plastic dowels	_	-	550	127	4
ENDURA Classic Post Sensor Up E27	-	-	-	Screw terminal	Screws, Plastic dowels	212	127	193	127	4
ENDURA Classic Post Down E27	_	_	_	Screw terminal	Screws, Plastic dowels	212	127	195	127	4

^{* 4099854452239 | ** 4099854452291}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ENDURA CLASSIC TRADITION ALU POST 330



ENDURA CLASSIC TRADITION ALU DOWN WALL



ENDURA CLASSIC TRADITION ALU **UP WALL**



Product colours


































X	

rioductifalle	GTIN (EAN)	No.	COLOR	MATERIAL	t[h] ²	W	оптрит 3	Im UGHT SOURCE	K	CRI		IP
ENDURA Classic Tradition 33cm E27 Gold	4099854 452314	1	Black/Gold	Aluminium	-	-	_	-	-	-	_	IP44
ENDURA Classic Tradition Down E27 Gold	4099854 452352	2	Black/Gold	Aluminium	-	-	_	-	-	-	_	IP44
ENDURA Classic Tradition Up E27 Gold	4099854 452376	3	Black/Gold	Aluminium	-	-	-	-	-	-	_	IP44
ENDURA Classic Tradition Un Sensor F27 Gold	///0085/ //52//37	3	Black/Gold	Δluminium	_			_	_	_	_	IPAA

Product name		X NOCL.	LED MODULE SITEGRATED	CONNECTOR	ACCES- SORIES NOLUCIO		W	(h)	Ø d [mm]	
ENDURA Classic Tradition 33cm E27 Gold	_	-	_	Screw terminal	Screws, Plastic dowels	170	170	325	-	4
ENDURA Classic Tradition Down E27 Gold	-	-	-	Screw terminal	Screws, Plastic dowels	230	170	230	-	4
ENDURA Classic Tradition Up E27 Gold	_	_	-	Screw terminal	Screws, Plastic dowels	230	170	260	-	4
ENDURA Classic Tradition Up Sensor E27 Gold	-	-	-	Screw terminal	Screws, Plastic dowels	230	170	280	-	4

^{* 4099854452352 | ** 4099854452376 ; 4099854452437 | *** 4099854452314 | **** 4099854452437}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

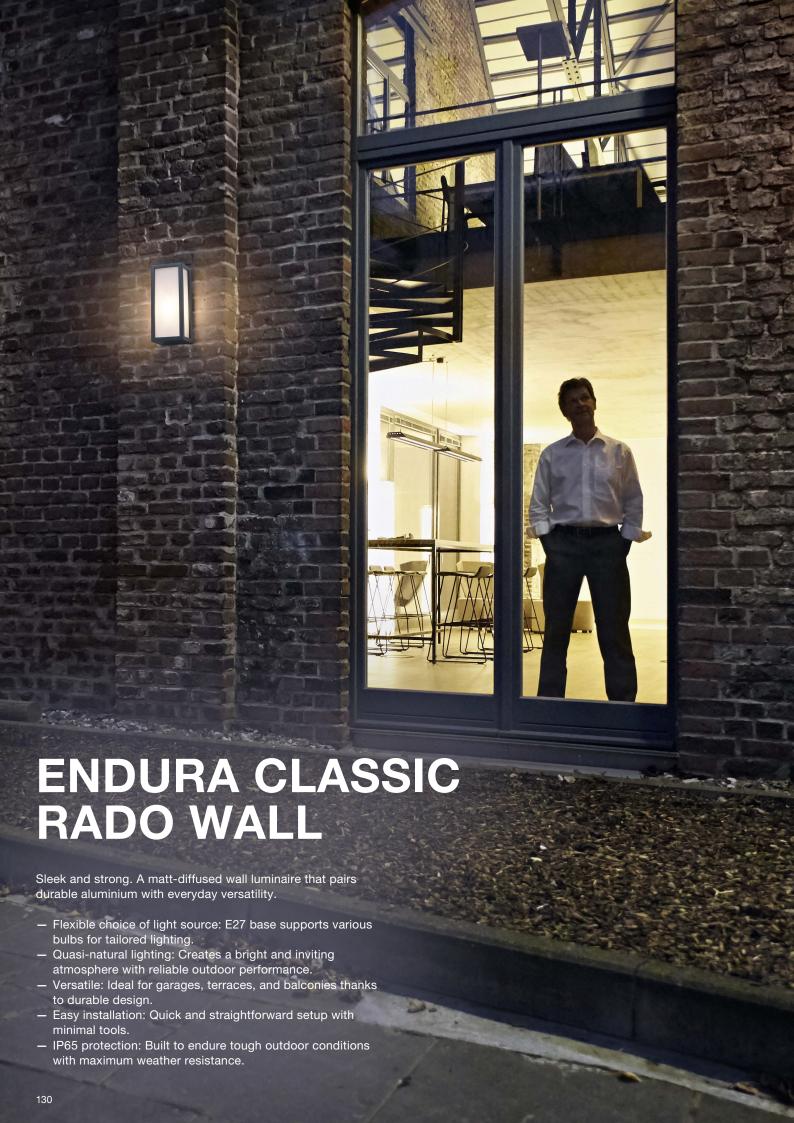













Product name		X NCL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORES NCLUOTO	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Classic E27 IP65 Rado Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	110	102	250	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name		X NCL.	MODULE NITEGRATIO	CONNECTOR	ACCES- SORIES PELICIPI	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Classic E27 IP65 Radick Wall Dark Gray	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	110	108	250	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












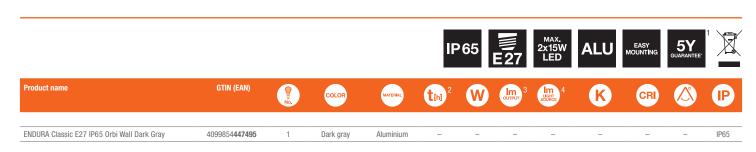

Product name		X Not.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES NOLLOCO	[mm]	(mm)	h	Ø d [mm]	
ENDURA Classic E27 IP65 Orbi Wall Dark Gray	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	200	90	290	_	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





Product colours










Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORES NCLUOTO	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Classic E27 IP65 Orbick Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	200	95	290	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

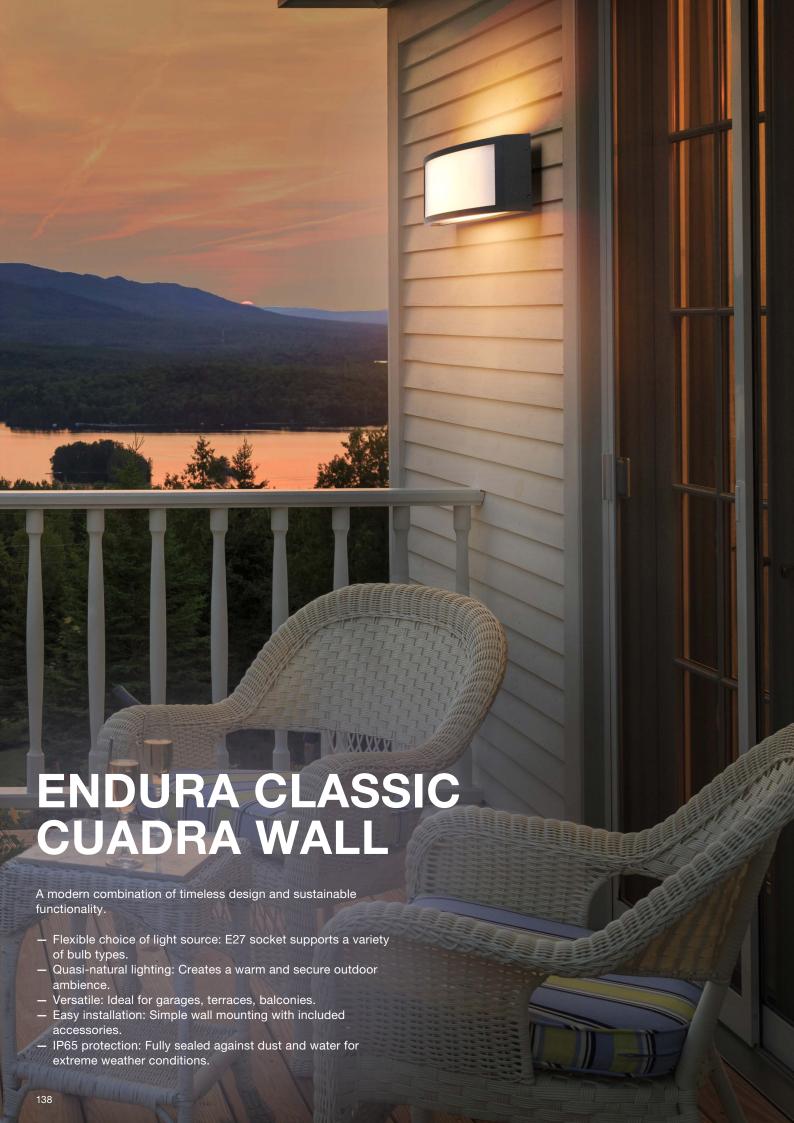











Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLLOCO	[mm]	(mm)	h	Ø d [mm]	
ENDURA Classic E27 IP65 Cuadra Wall Dark Gray	_	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	260	88	120	_	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







Product sizes (in mm)



ENDURA Classic Angela Wall E27 IP54 Dark Grey

4099854**415593**



IP54





Aluminium

Dark gray

Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES INCLION	[mm]	W	(h	Ø d [mm]	
ENDURA Classic Angela Wall E27 IP54 Dark Grey	_	1	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Mounting equipment	250	140	148	_	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA CLASSIC ERDA WALL Classic design meets modern lighting - outdoor wall luminaire with E27 socket for smart and classic light sources. - Bulb freedom: E27 socket allows for flexible lamp selection - from standard bulbs to smart lighting solutions. - Smart-compatible: Ready for SMART+ lamps, enabling seamless integration into intelligent lighting systems. Outdoor durability: IP54-rated aluminium housing and opal polycarbonate diffuser offer reliable protection in all weather conditions. - Easy installation: Fast and tool-friendly mounting with full accessory kit included. Tailor your light: Delivered without bulb so you can customize brightness, tone, and functionality as needed. 142



Product colours

















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th)2	W	lm 3	Im 4	K	CRI		(IP)
ENDURA Classic Erda Wall E27 IP54 Dark Grey	4099854 415616	1	Dark gray	Aluminium	_	_	_	_	_	_	-	IP54

Product name		X PIGL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLIED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Classic Erda Wall E27 IP54 Dark Grey	_	1		Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Mounting equipment	200	270	250	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Classic Tubular Wall Sensor E27 IP44 Dark Grey	_	1		Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	82	118	278	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th 2	W	іт 3	Im ught source	K	CRI		IP
ENDURA Classic Frame Wall Sensor E27 IP54 Dark Grey	4099854 415654	1	Dark gray	Aluminium	-	-	-	_	-	_	-	IP44

Product name	NCT.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES PACLUDED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Classic Frame Wall Sensor E27 IP54 Dark Grey	 		Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	110	140	285		

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser















Product name		X NCL.	LED MODULE BITEGRATIO	COMMECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h)	Ø d [mm]	
ENDURA Classic Cascade Wall E27 Amber	_	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	160	120	180	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	(h) ²	W	оптрит 3	Im 4 UGHT SOURCE	K	CRI		(P
ENDURA Classic Tubular Wall E27	4099854 452499	1	Dark gray	Aluminium	-	-	-	_	_	_	-	IP44


Product name		NCL.	LED MODULE INTEGRATED	CONNECTION	ACCES- SORES NCLIDED	[mm]	W	(h	Ø d [mm]	
ENDURA Classic Tubular Wall E27	_		_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	117	82	222		1

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser














Product name	X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES PICLUSED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA Classic Calice Wall Sensor E27	 _	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	161	120	305	_	4

^{* 4058075477971}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

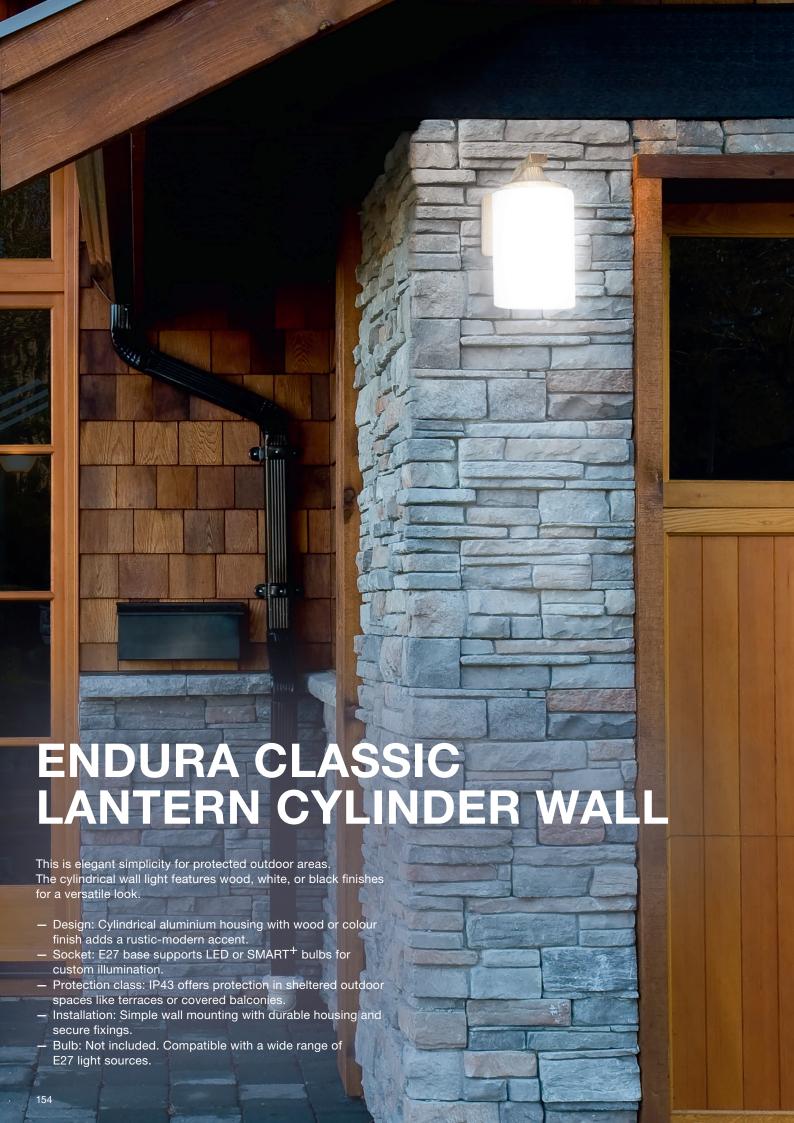
























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Classic Lantern Cylinder E27 Wood	4099854 452123	1	Wood decor	Aluminium	_	_		_	_		_	IP43
ENDURA Classic Lantern Cylinder E27 White	4099854 452178	1	White	Aluminium		-	-	-	-	-	-	IP43
ENDURA Classic Lantern Cylinder E27 Black	4099854 452079	1	Black	Aluminium	-	-	_	-	-	-	-	IP43


Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES NCLUMED	[mm]	W	(h	Ø d [mm]	
ENDURA Classic Lantern Cylinder E27 Wood	_	_	_	Screw terminal	Screws, Plastic dowels	210	118	212	118	4
ENDURA Classic Lantern Cylinder E27 White	_	_	-	Screw terminal	Screws, Plastic dowels	210	118	212	118	4
ENDURA Classic Lantern Cylinder E27 Black	_	_	-	Screw terminal	Screws, Plastic dowels	210	118	212	118	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im UGHT SOURCE	K	CRI		P
ENDURA Classic Lantern Square S E27	4099854 447440	1	Black	Aluminium	-	-	-	-	-	-	-	IP43
ENDURA Classic Lantern Square M E27	4099854 447402	1	Black	Aluminium	-	-	-	-	-	-	-	IP43

Product name		X Proc.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	W	(h	Ø d [mm]	
ENDURA Classic Lantern Square S E27		_			Screws, Plastic dowels	105	150	225	_	6
ENDURA Classic Lantern Square M E27	-	_	-	-	Screws, Plastic dowels	105	150	293	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Indirect lighting: Creates a wonderful atmosphere while it withstands moisture and dust in outdoor settings (IP65).











Product name		X PICL.	MODULE INTEGRATED	CONNECTOR	ACCES- SONIES INCLUED	[mm]	W	(h	Ø d [mm]	
ENDURA Classic GU10 IP65 Isidor Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	60	88	170	-	4
ENDURA Classic GU10 IP65 Isidor Wall Sensor Dark Gray	-	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	60	88	170	_	4

^{* 4099854447327 | ** 4099854447860}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











Product name		X NGL.	LED MODULE NTEGRATED	CONNECTOR	ACCES- SORES NCLUOTO	[mm]	W	(h	Ø d [mm]	
ENDURA Classic GU10 IP65 Itys Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	65	100	158	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

ENDURA CLASSIC IVE WALL A strong silhouette and soft light. This minimalist, indirect, LED-friendly light makes homes shine after dark. - Flexible choice of light source: GU10 socket allows a wide range of compatible bulbs. Quasi-natural lighting: Brightens spaces without glare, creating a pleasant outdoor environment. Versatile: Suitable for facades, garages, balconies and more. - Easy installation: Ready for setup with included mounting accessories. - Indirect lighting: Delivers soft illumination to create inviting nighttime spaces. 162











Product name		X NCL.	LED MODULE INTEGRATED	CORRECTOR	ACCES- SORIES NCLUOTO	[mm]	w [mm]	(h	Ø d [mm]	
ENDUDA OL : OLIKO IDOS I. W. II.D. I. O.				T : 100 1 (1 N DE)	0 8 1 1 1 1 1	0.5	100			
ENDURA Classic GU10 IP65 Ive Wall Dark Gray	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	65	100	176	-	

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




Strong accents for modern facades, featuring architectural up/down lighting and a sleek, oval design.

- Design: Up/down light in an oval aluminium housing for facade elegance.
- Light source: GU10 socket supports bulbs up to 35W (not included).
- Material: Made from durable dark grey aluminium (RAL7016) with timeless, robust finish.
- Weatherproof: IP44 protection and IK03 shock resistance for outdoor reliability.
- Installation: Mounting materials and 3-pin terminal included.



















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	Im ught source	K	CRI		P
ENDURA Classic Cannon Wall UpDown GU10	4099854 452000	1	Dark gray	Aluminium	_	-	_	-	-	-	-	IP44

Product name	X NGL.	LED MODULE INTEGRATED	COMMECTOR	ACCES- SORES MCLIOSTO	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA Classic Cannon Wall UpDown GU10	 	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels, Allen wrench	105	75	180	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



- Flexible use: Featuring a GU10 base, these lights offer easy lamp replacement and the option to install normal or smart bulbs.
- Varied: Directional head provides focused lighting, easily adjustable to suit your needs.
- Robust material: Made with high-quality aluminium and a sleek cubic design that complements any exterior.
- Versatile: Suitable for a wide range of outdoor areas, including facades, garages, and entrance ways.
- IP44 protection: Designed for the outdoors, this light is moisture-proof, ensuring protection against splash water from all directions.









Product sizes (in mm)



66


















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t M ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Classic Cube Adjustable Wall Black	4099854 445989	1	Black	Aluminium		-	_	_	_	_	_	IP44
ENDURA Classic Cube Adjustable Wall Silver	4099854 446252	1	Silver	Aluminium	_	-	-	-	-	-	-	IP44
ENDURA Classic Cube Adjustable Wall White	4099854 446290	1	White	Aluminium	-		-	-	-	-	-	IP44

Product name		X PNCL.	LED MODULE WITEGRATED	conscion five	ACCES- SORIES NICLUSED	[mm]	W	(h	Ø d [mm]	3
ENDURA Classic Cube Adjustable Wall Black	_	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	66	93	100	-	6
ENDURA Classic Cube Adjustable Wall Silver	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	66	93	100	-	6
ENDURA Classic Cube Adjustable Wall White	-	_	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	66	93	100	-	6

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

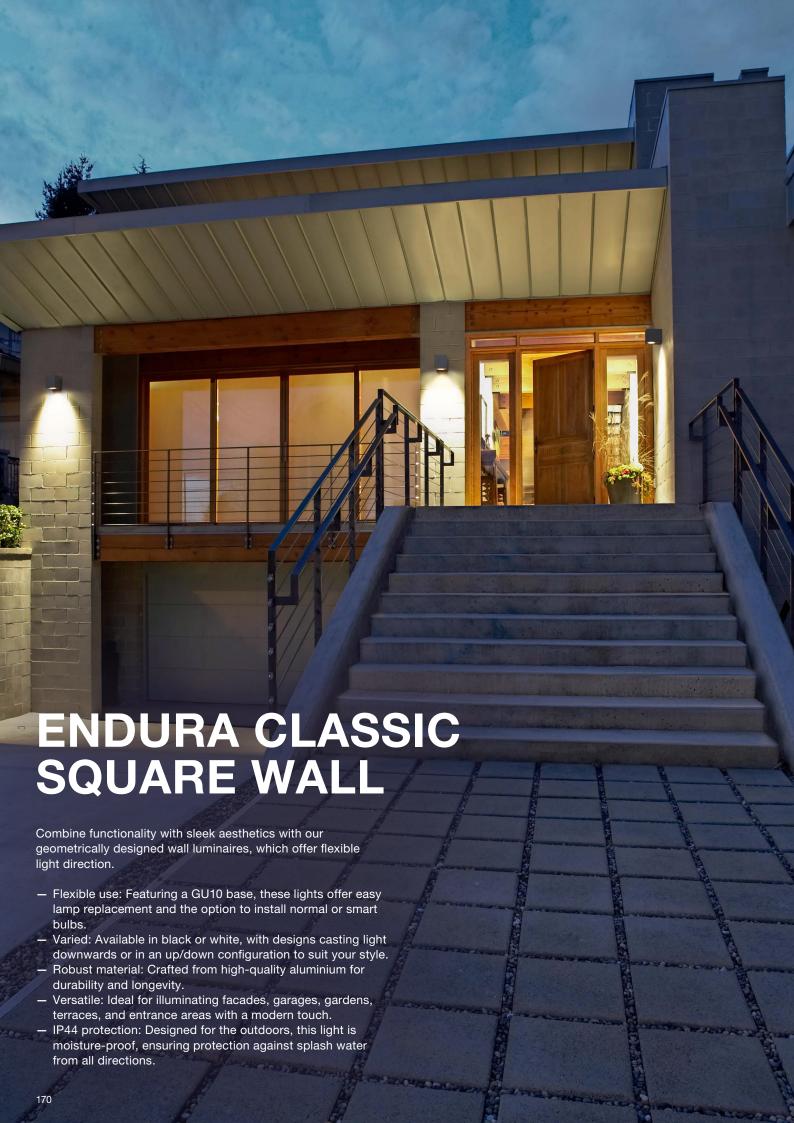















81

92

92 150

















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Classic Square Down Black	4099854 447587	1	Black	Aluminium	-	-	-	-	-	-	-	IP44
ENDURA Classic Square Down White	4099854 447600	1	White	Aluminium	-	-	-	-	-	-	-	IP44
ENDURA Classic Square UpDown Black	4099854 447723	2	Black	Aluminium	-	-	-	-	-	-	-	IP44
ENDURA Classic Square UpDown White	4099854 447846	2	White	Aluminium	_	_	_	_	_	_	_	IP44

Product name		X NCL.	MODULE NYEGRATED	CONNECTOR	ACCES- SORIES NCLUOD	[mm]	W	(h	Ø d [mm]	
ENDURA Classic Square Down Black	_	_	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	81	92	_	6
ENDURA Classic Square Down White	_	-	_	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	81	92	_	6
ENDURA Classic Square UpDown Black	-	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	150	92	-	6
ENDURA Classic Square UpDown White	_	-	-	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	68	150	92	-	6

^{* 4099854447587; 4099854447600 | ** 4099854447723; 4099854447846}

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser












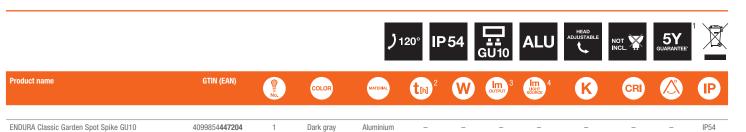

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES NCLUDED		W [mm]	(h	Ø d [mm]	
ENDURA Classic Garden Spot Spike GU10	-		-	Plug type C (EU)	-	65	130	415	_	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



Illuminate your outdoor spaces with powerful precision with OSRAM FLOODLIGHTS, engineered to brighten the darkest corners with ease. Combining high performance lighting with a robust design, our floodlights are suitable for a wide range of outdoor applications, each ensuring a safe and well-lit environment.

The addition of SMART⁺ Floodlights within the range brings connectivity and convenience to the forefront, allowing seamless control over lighting intensity and schedules. With their easy installation, energy-efficient LEDs, durable materials, and advanced sensor technology, these luminaires are ideal for security, aesthetic spot lighting, and general outdoor illumination.

Designed with versatility in mind, our floodlights are available in a variety of beam angles and brightness levels, all with high IP ratings for excellent weather resistance. Step into a well-lit world of safety and visibility with LEDVANCE's extensive selection of OSRAM floodlights.

To section !

Markey Markey





ENDURA FLOOD PCR SENSOR 10W



ENDURA FLOOD PCR SENSOR 20W



ENDURA FLOOD PCR SENSOR 30W




ENDURA FLOOD PCR SENSOR


Product colours



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im ught source	K	CRI		IP
Endura Flood PCR Sensor 10W 840 DG	4099854 486968	1	Dark gray	Aluminium	30 000	10.0	1 000	1 050	4000	> 80	110	IP44
Endura Flood PCR Sensor 20W 840 DG	4099854 487026	2	Dark gray	Aluminium	30 000	20.0	1 800	1 900	4000	> 80	110	IP65
Endura Flood PCR Sensor 30W 840 DG	4099854 487040	3	Dark gray	Aluminium	30 000	30.0	3 000	3150	4000	> 80	110	IP65
Endura Flood PCR Sensor 50W 840 DG	4099854 487064	4	Dark gray	Aluminium	30 000	50.0	5 000	5 2 5 0	4000	> 80	110	IP65

Product name		X NCL.	LED MODULE WITEGRATED	CONNECTOR	ACCISA SORES RELLORD	[mm]	(mm)	(h	Ø d [mm]	
Endura Flood PCR Sensor 10W 840 DG	15 000	_	_	Terminal, 3-Pole (L, N, PE)	_	108	65	168	_	8
Endura Flood PCR Sensor 20W 840 DG	30 000	-	_	Terminal, 3-Pole (L, N, PE)	-	108	65	168	_	8
Endura Flood PCR Sensor 30W 840 DG	30 000	-	-	Terminal, 3-Pole (L, N, PE)	-	133	65	189	-	8
Endura Flood PCR Sensor 50W 840 DG	30 000	-	-	Terminal, 3-Pole (L, N, PE)	-	170	70	223	-	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



ENDURA FLOOD PCR SENSOR 10W



ENDURA FLOOD PCR SENSOR 20W



ENDURA FLOOD PCR SENSOR 30W



ENDURA FLOOD PCR SENSOR



Product colours

















Product sizes (in mm)



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
Endura Flood PCR Sensor 10W 830 Dark gray	4099854 487088	1	Dark gray	Aluminium	30 000	10.0	1 000	1 050	3 000	> 80	110	IP44
Endura Flood PCR Sensor 10W 830 White	4099854 487125	1	White	Aluminium	30 000	10.0	1 000	1 050	3 000	> 80	110	IP65
Endura Flood PCR Sensor 20W 830 Dark gray	4099854 487170	2	Dark gray	Aluminium	30 000	20.0	1 800	1 900	3 000	> 80	110	IP65
Endura Flood PCR Sensor 20W 830 White	4099854 487194	2	White	Aluminium	30 000	20.0	1 800	1 900	3 000	> 80	110	IP65
Endura Flood PCR Sensor 30W 830 Dark gray	4099854 487217	3	Dark gray	Aluminium	30 000	30.0	3 000	3150	3 000	> 80	110	IP44
Endura Flood PCR Sensor 30W 830 White	4099854 487231	3	White	Aluminium	30 000	30.0	3800	3150	3 000	> 80	110	IP65
Endura Flood PCR Sensor 50W 830 Dark gray	4099854 487279	4	Dark gray	Aluminium	30 000	50.0	5 000	5 2 5 0	3 000	> 80	110	IP65
Endura Flood PCR Sensor 50W 830 White	4099854 487309	4	White	Aluminium	30 000	50.0	5 000	5 2 5 0	3 000	> 80	110	IP65

Product name		X Not.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NCLUDED	[mm]	(mm)	(h	Ø d [mm]	
Endura Flood PCR Sensor 10W 830 Dark gray	15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	108	65	168	-	8
Endura Flood PCR Sensor 10W 830 White	15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	108	65	168	-	8
Endura Flood PCR Sensor 20W 830 Dark gray	15 000	_	-	Terminal, 3-Pole (L, N, PE)	-	108	65	168	-	8
Endura Flood PCR Sensor 20W 830 White	15 000	_	-	Terminal, 3-Pole (L, N, PE)	-	108	65	168	-	8
Endura Flood PCR Sensor 30W 830 Dark gray	15 000	_	-	Terminal, 3-Pole (L, N, PE)	-	133	65	189	-	8
Endura Flood PCR Sensor 30W 830 White	15 000	_	-	Terminal, 3-Pole (L, N, PE)	-	133	65	189	-	8
Endura Flood PCR Sensor 50W 830 Dark gray	15 000	_	-	Terminal, 3-Pole (L, N, PE)	-	170	70	223	-	8
Endura Flood PCR Sensor 50W 830 White	15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	170	70	223	-	8


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	оптрит 3	Im ught source	K	CRI		IP
ENDURA PRO Flood Sensor 15W 840 IP55 White	4099854 451720	1	White	Plastic (PC)	30 000	15.0	1 500	1 980	4000		100	IP55
ENDURA PRO Flood Sensor 15W 840 IP55 Dark Gray	4099854 451706	1	Dark grey	Plastic (PC)	50 000	15.0	1 500	1 980	4000	-	100	IP55
ENDURA PRO Flood Sensor 27W 840 IP55 White	4099854 451799	1	White	Plastic (PC)	50 000	27.0	3 000	3800	4000	-	100	IP55
ENDURA PRO Flood Sensor 27W 840 IP55 Dark Gray	4099854 451744	1	Dark grey	Plastic (PC)	30 000	27.0	3 000	3800	4000	-	100	IP55

Product name		X P	MODULE MICGANIZO	COMMETTON	ACCES- SORIES INCLUEED	[mm]	(mm)	(h	Ø d [mm]	
ENDURA PRO Flood Sensor 15W 4000K IP55 White	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	151	56	205	_	6
ENDURA PRO Flood Sensor 15W 4000K IP55 Dark Gray	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	151	56	205	-	6
ENDURA PRO Flood Sensor 27W 4000K IP55 White	12500	-	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	201	56	225	-	4
ENDURA PRO Flood Sensor 27W 4000K IP55 Dark Gray	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	201	56	225	-	4


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t _[h] ²	W	lm 3	Im ught source	K	CRI		P
ENDURA PRO Spot Sensor 16W 4000K IP55 White	4099854 451836	1	White	Plastic (PC)	30 000	16.0	1 500	2140	4000	_	50	IP55
ENDURA PRO Spot Sensor 16W 4000K IP55 Dark Gray	4099854 451812	1	Dark grey	Plastic (PC)	30 000	16.0	1 500	2140	4000	-	50	IP55


Product name		X O	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUEED	[mm]	W [mm]	(h	Ø d [mm]	
ENDURA PRO Spot Sensor 16W 4000K IP55 White	12500		Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	177	58	187	_	6
ENDURA PRO Spot Sensor 16W 4000K IP55 Dark Gray	12500	_	Not replaceable	Terminal, 3-Pole (L, N, PE)	Screws, Plastic dowels	177	58	187	-	6


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser




























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	thi 2	W	lm 3	lm ught source	K	CRI		P
Floodlight Essential Sensor 100W 840 Black	4099854 429835	1	Black	Aluminium	25 000	100.0	10 000	11 500	4000	≥ 80	110	IP44
Floodlight Essential Sensor 150W 840 Black	4099854 429958	1	Black	Aluminium	25 000	150.0	15 000	17 000	4000	≥ 80	110	IP44
Floodlight Essential Sensor 200W 840 Black	4099854 430015	1	Black	Aluminium	25 000	200.0	20 000	22 500	4000	≥ 80	110	IP44


Product name		X O	MODULE NITEGRATED	CONNECTOR TYPE	ACCES- SORIES NCCLUDED	[mm]	W	(h	Ø d [mm]	
Floodlight Essential Sensor 100W 840 Black	12500		Not replaceable	Cable, 3-pole	_	270	45	272	_	4
Floodlight Essential Sensor 150W 840 Black	12500	-	Not replaceable	Cable, 3-pole	-	337	45	310	-	4
Floodlight Essential Sensor 200W 840 Black	12500	_	Not replaceable	Cable, 3-pole	-	402	45	341	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

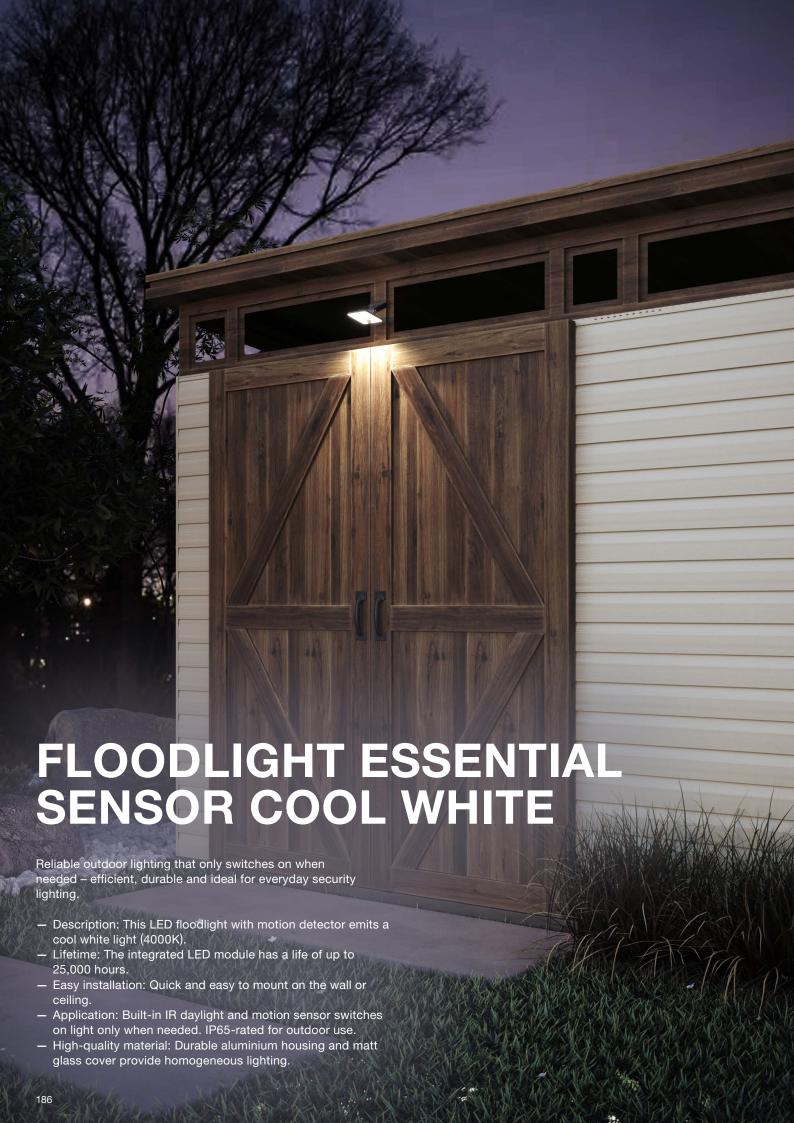
























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
Floodlight Essential Sensor 10W 840 Black	4099854 429897	1	Black	Aluminium	25 000	10.0	900	950	4000	≥ 80	100	IP65
Floodlight Essential Sensor 20W 840 Black	4099854 430077	1	Black	Aluminium	25 000	20.0	1 800	1 900	4000	≥ 80	100	IP65
Floodlight Essential Sensor 30W 840 Black	4099854 430138	1	Black	Aluminium	25 000	30.0	2700	2850	4000	≥ 80	100	IP65
Floodlight Essential Sensor 50W 840 Black	4099854 430213	1	Black	Aluminium	25 000	50.0	4500	4750	4000	≥ 80	100	IP65


Product name		X ()	MODULE MITEGRATED	CONNECTOR	ACCES- SORIES NOLLINED	[mm]	W	(h	Ø d [mm]	
Floodlight Essential Sensor 10W 840 Black	25 000		Not replaceable	Cable, 3-pole	Screws, Plastic dowels	132	83	33	_	20
Floodlight Essential Sensor 20W 840 Black	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	173	111	33	_	20
Floodlight Essential Sensor 30W 840 Black	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	186	128	33	_	20
Floodlight Essential Sensor 50W 840 Black	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	238	161	34	-	12

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

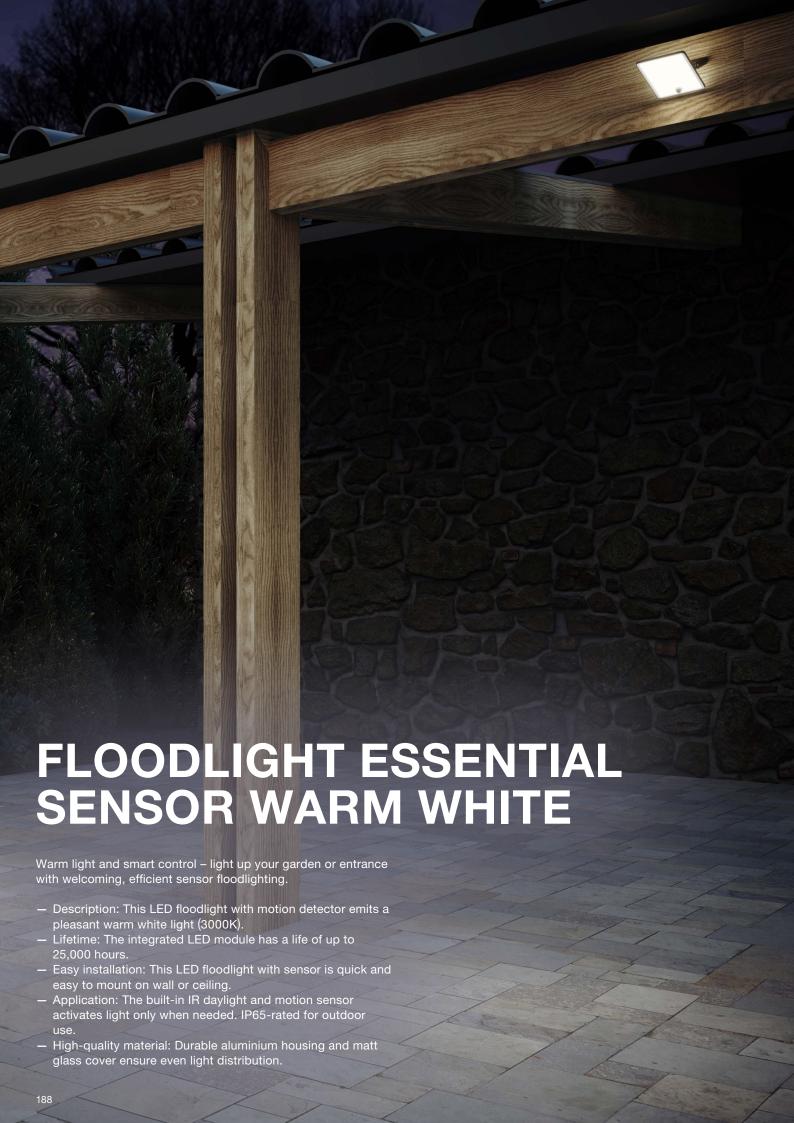























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
Floodlight Essential Sensor 10W 830 Black	4099854 429859	1	Black	Aluminium	25 000	10.0	900	950	3 000	≥ 80	100	IP65
Floodlight Essential Sensor 20W 830 Black	4099854 430053	1	Black	Aluminium	25 000	20.0	1 800	1 900	3 000	≥ 80	100	IP65
Floodlight Essential Sensor 30W 830 Black	4099854 430091	1	Black	Aluminium	25 000	30.0	2700	2850	3 000	≥ 80	100	IP65
Floodlight Essential Sensor 50W 830 Black	4099854 430176	1	Black	Aluminium	25 000	50.0	4500	4750	3 000	≥ 80	100	IP65

Product name		X P	MODULE NITEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
Floodlight Essential Sensor 10W 830 Black	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	132	83	33	_	20
Floodlight Essential Sensor 20W 830 Black	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	173	111	33	_	20
Floodlight Essential Sensor 30W 830 Black	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	186	128	33	-	20
Floodlight Essential Sensor 50W 830 Black	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	238	161	34	-	12

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser















Product colours










108





























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
ENDURA Flood PCR 10W 840 Dark gray	4099854 485961	1	Dark gray	Aluminium	30 000	10	1 000	1 050	4000	> 80	110	IP65
ENDURA Flood PCR 20W 840 Dark gray	4099854 486067	1	Dark gray	Aluminium	30 000	20	1800	1 050	4000	> 80	110	IP65
ENDURA Flood PCR 30W 840 Dark gray	4099854 486081	2	Dark gray	Aluminium	30 000	30	3 000	1 900	4000	> 80	110	IP65
ENDURA Flood PCR 50W 840 Dark gray	4099854 486104	3	Dark gray	Aluminium	30 000	50	5 000	1 900	4000	> 80	110	IP65
ENDURA Flood PCR 100W 840 Dark gray	4099854 487330	4	Dark gray	Aluminium	30 000	100	12000	3150	4000	> 80	110	IP65
ENDURA Flood PCR 150W 840 Dark gray	4099854 487378	5	Dark gray	Aluminium	30 000	150	18 000	3150	4000	> 80	110	IP65

Product name		X NCL.	LED MODULE INTEGRATED	CONNECTOR	ACCES- SORIES NOLLUDED	[mm]	(mm)	(h	Ø d [mm]	a
ENDURA Flood PCR 10W 840 Dark gray	15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	108	33	122	-	12
ENDURA Flood PCR 20W 840 Dark gray	15 000	-	_	Terminal, 3-Pole (L, N, PE)	-	108	33	122	-	12
ENDURA Flood PCR 30W 840 Dark gray	15 000	-	_	Terminal, 3-Pole (L, N, PE)	-	133	34	153	-	12
ENDURA Flood PCR 50W 840 Dark gray	15 000	-	_	Terminal, 3-Pole (L, N, PE)	-	170	39	193	-	12
ENDURA Flood PCR 100W 840 Dark gray	15 000	-	_	Terminal, 3-Pole (L, N, PE)	-	284	56	337	-	2
ENDURA Flood PCR 150W 840 Dark gray	15 000	-	_	Terminal, 3-Pole (L, N, PE)	-	335	60	417	-	2

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser











Product colours

















Product sizes (in mm)

























V	
<u>/⊸</u>	

Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im 4	K	CRI		P
ENDURA Flood PCR 10W 830 Dark gray	4099854486326	1	Dark gray	Aluminium	30 000	10	1 000	1 050	3 000	> 80	-	IP65
ENDURA Flood PCR 10W 830 White	4099854486340	1	White	Aluminium	30 000	10	1 000	1 050	3 000	> 80	110	IP65
ENDURA Flood PCR 20W 830 Dark gray	4099854486388	2	Dark gray	Aluminium	30 000	20	1 800	1 900	3 000	> 80	110	IP65
ENDURA Flood PCR 20W 830 White	4099854486425	2	White	Aluminium	30 000	20	1 800	1 900	3 000	> 80	110	IP65
ENDURA Flood PCR 30W 830 Dark gray	4099854486463	3	Dark gray	Aluminium	30 000	30	3 000	3150	3 000	> 80	110	IP65
ENDURA Flood PCR 30W 830 White	4099854486500	3	White	Aluminium	30 000	30	3 000	3150	3 000	> 80	110	IP65
ENDURA Flood PCR 50W 830 Dark gray	4099854486548	4	Dark gray	Aluminium	30 000	50	5 000	5 2 5 0	3 000	> 80	110	IP65
ENDURA Flood PCR 50W 830 White	4099854486944	4	White	Aluminium	30 000	50	5 000	5 250	3 000	> 80	110	IP65


	X O	MODULE INTEGRATED	CONNECTOR TYPE	ACCES- SORIES NCLUOTO		w [mm]	(h	Ø d [mm]	
15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	108	33	122	-	12
15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	108	33	122	-	12
15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	108	33	122	-	12
15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	108	33	122	-	12
15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	133	34	153	-	12
15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	133	34	153	-	12
15 000	-	-	Terminal, 3-Pole (L, N, PE)	-	170	39	193	-	12
15 000	-	-	Terminal, 3-Pole (L, N, PE)	_	170	39	193	-	12
	15000 15000 15000 15000 15000 15000	15000 - 15000 - 15000 - 15000 - 15000 - 15000 - 15000 -	15000 15000 15000 15000 15000 15000 15000	15000 - Terminal, 3-Pole (L, N, PE)	15000 Terminal, 3-Pole (L, N, PE) - 15000 Terminal, 3-Pole (L, N, PE) - 15000 Terminal, 3-Pole (L, N, PE) - 15000 Terminal, 3-Pole (L, N, PE)	15000	15000 Terminal, 3-Pole (L, N, PE) - 108 33 15000 Terminal, 3-Pole (L, N, PE) - 108 33 15000 Terminal, 3-Pole (L, N, PE) - 108 33 15000 Terminal, 3-Pole (L, N, PE) - 108 33 15000 Terminal, 3-Pole (L, N, PE) - 108 33 15000 Terminal, 3-Pole (L, N, PE) - 133 34 15000 Terminal, 3-Pole (L, N, PE) - 133 34 15000 Terminal, 3-Pole (L, N, PE) - 170 39	15000 Terminal, 3-Pole (L, N, PE) - 108 33 122 15000 Terminal, 3-Pole (L, N, PE) - 108 33 122 15000 Terminal, 3-Pole (L, N, PE) - 108 33 122 15000 Terminal, 3-Pole (L, N, PE) - 108 33 122 15000 Terminal, 3-Pole (L, N, PE) - 108 33 122 15000 Terminal, 3-Pole (L, N, PE) - 133 34 153 15000 Terminal, 3-Pole (L, N, PE) - 133 34 153 15000 Terminal, 3-Pole (L, N, PE) - 170 39 193	15000

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	3 оптрит	Im ught source	K	CRI		IP
Floodlight EA 5W 840 BK	4099854 429552	1	Black	Aluminium	50 000	5.0	870		4000	> 80	95	IP65
Floodlight EA 10W 840 BK	4099854 429491	1	Black	Aluminium	50 000	10.0	1 750	-	4000	> 80	95	IP65
Floodlight EA 15W 840 BK	4099854 429514	1	Black	Aluminium	50 000	15.0	2600	-	4000	> 80	95	IP65
Floodlight EA 24.5W 840 BK	4099854 429538	1	Black	Aluminium	50 000	24.5	4600	-	4000	> 80	100	IP65


Product name		X NOL.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUDED	[mm]	W [mm]	(h	Ø d [mm]	
Floodlight EA 5W 840 BK	25 000		_	Cable, 3-pole	_	128	32	123	_	8
Floodlight EA 10W 840 BK	25 000	-	Not replaceable	Cable, 3-pole	-	128	32	123	_	8
Floodlight EA 15W 840 BK	25 000	_	Not replaceable	Cable, 3-pole	-	128	32	123	_	8
Floodlight EA 24.5W 840 BK	25 000	_	Not replaceable	Cable, 3-pole	-	211	32	210	-	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	Im 3	lm ught source	K	CRI		IP
Floodlight Essential 100W 4000K	4099854 429576	1	Black	Aluminium	25 000	100	10 000	11 500	4000	≥ 80	110	IP65
Floodlight Essential 150W 4000K	4099854 429651	1	Black	Aluminium	25 000	150	15 000	17 000	4000	≥ 80	110	IP65
Floodlight Essential 200W 4000K	4099854 429675	1	Black	Aluminium	25 000	200	20 000	22 500	4000	≥ 80	110	IP65


Product name		X P	MODULE MITEGRATED	CONNECTION TYPE	ACCES- SORIES NCLUDED	[mm]	W	(h	Ø d [mm]	6
Floodlight Essential 100W 4000K	12500		Not replaceable	Cable, 3-pole	-	270	30	222	_	4
Floodlight Essential 150W 4000K	12500	-	Not replaceable	Cable, 3-pole	-	337	31	263	-	4
Floodlight Essential 200W 4000K	12500	-	Not replaceable	Cable, 3-pole	-	402	31	291	-	4

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	3 оптрит	Im UGHT SOURCE	K	CRI		IP
Floodlight Essential 10W 6500K	4099854 429637	1	Black	Aluminium	25 000	10	900	950	6 500	≥ 80	100	IP65
Floodlight Essential 20W 6500K	4099854 429736	1	Black	Aluminium	25 000	20	1 800	1 900	6 500	≥ 80	100	IP65
Floodlight Essential 30W 6500K	4099854 429774	1	Black	Aluminium	25 000	30	2700	2850	6 500	≥ 80	100	IP65
Floodlight Essential 50W 6500K	4099854 429811	1	Black	Aluminium	25 000	50	4500	4750	6 500	≥ 80	100	IP65


Product name		X NOL.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES INCLUEED	[mm]	W	(h	Ø d [mm]	
Floodlight Essential 10W 6500K	25 000		Not replaceable	Cable, 3-pole	Screws, Plastic dowels	132	83	28	_	20
Floodlight Essential 20W 6500K	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	173	111	28	_	20
Floodlight Essential 30W 6500K	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	186	128	28	-	20
Floodlight Essential 50W 6500K	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	238	161	30	-	12

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im JUGHT SOURCE	K	CRI		IP
Floodlight Essential 10W 3000K	4099854 429590	1	Black	Aluminium	25 000	10	900	950	3 000	≥ 80	100	IP65
Floodlight Essential 20W 3000K	4099854 429705	1	Black	Aluminium	25 000	20	1 800	1 900	3 000	≥ 80	100	IP65
Floodlight Essential 30W 3000K	4099854 429750	1	Black	Aluminium	25 000	30	2700	2850	3 000	≥ 80	100	IP65
Floodlight Essential 50W 3000K	4099854 429798	1	Black	Aluminium	25 000	50	4500	4750	3 000	≥ 80	100	IP65

Product name		X NOL.	MODULE INTEGRATED	COMMECTOR	ACCES- SORIES INCLUDED	[mm]	W	(h	Ø d [mm]	
Floodlight Essential 10W 3000K	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	132	83	28	_	20
Floodlight Essential 20W 3000K	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	173	111	28	-	20
Floodlight Essential 30W 3000K	25 000	-	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	186	128	28	-	20
Floodlight Essential 50W 3000K	25 000	_	Not replaceable	Cable, 3-pole	Screws, Plastic dowels	238	161	30	-	12

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser

SENSOR CEILING 360DEG IP44 Compact efficiency - indoor motion sensor for intelligent, energy-saving light control. Energy-conscious lighting: Detects motion to switch lights on only when needed - ideal for reducing unnecessary power consumption. Versatile operation: Choose between two modes - 6 hours of continuous light or motion-activated illumination. Discreet and practical: Compact housing blends seamlessly into interior spaces like stairwells, basements, and Built for indoors: With IP44 protection and protection class II, it's designed for reliable performance in demanding environments. Quick to install: Straightforward setup for immediate energy-saving benefits.









Product name		X NOSL =	LED MODULE INTEGRATED	OCNNECTOR TYPE	ACCES- SORIES INCLUED	[mm]	(mm)	(þ.	Ø d [mm]	
Sensor Ceiling 360DEG IP44 WT	-	_	-	Screw terminal, 3-Pole	Mounting screws,Plastic dowels	_	_	50	92	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser






Product colours





















Product name	GTIN (EAN)	No.	COLOR	MATERIAL	th) ²	W	lm 3	Im ught source	K	CRI		P
Sensor Wall 110DEG IP44 WT	4099854 454134	1	White	Polycarbonate (PC)	-	-	-	-	-	-	-	IP44
Sensor Wall 110DEG IP44 DG	4099854 454073	1	Dark grey	Polycarbonate (PC)	-	-	-	-	-	-	-	IP44

Product name		X NOL.	MODULE INTEGRATED	CONSECTOR	ACCES- SORIES INCLIDED		W [mm]	(h	Ø d [mm]	
Sensor Wall 110DEG IP44 WT		_	_	Screw terminal, 3-Pole	Mounting screws,Plastic dowels	60	77	72	_	8
Sensor Wall 110DEG IP44 DG	-	_	-	Screw terminal, 3-Pole	Mounting screws, Plastic dowels	60	77	72	-	8


¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser



























Product name	GTIN (EAN)	No.	COLOR	MATERIAL	t [h] ²	W	lm 3	Im ught source	K	CRI		IP
Sensor Wall 180DEG IP55 WT	4099854 454240	1	White	Polycarbonate (PC)	-	-	-	-	-	-	-	IP55
Sensor Wall 180DEG IP55 DG	4099854 454196	1	Dark grey	Polycarbonate (PC)	-	-	_	_	-	_	-	IP55

Product name		X NOCL.	MODULE INTEGRATED	CONNECTOR	ACCES- SORIES MICLIDIDE		W [mm]	(h	Ø d [mm]	
Sensor Wall 180DEG IP55 WT		_	_	Screw terminal, 3-Pole	Mounting screws, Plastic dowels	76	50	91	_	8
Sensor Wall 180DEG IP55 DG	-	_	-	Screw terminal, 3-Pole	Mounting screws, Plastic dowels	76	50	91	_	8

¹ The exact terms and conditions can be found at www.ledvance.com/consumer/services/guarantee | 2 Average lifetime in hours | 3 Total luminous flux of the luminaire taking into account the diffuser 4 Total luminous flux of the contained light sources without the diffuser







ATTRACTIVE SHELF DESIGN

A shelf full of choices. Experience our wide range of durable, customisable outdoor lighting options for every need, presented with built-in viewing examples.







COMPACT DISPLAYS

Appealing, informative and compact. Our eye-catching outdoor luminaire displays offer a premium presentation perfectly designed to efficiently showcase the diverse range of outdoor lighting solutions.

SYMBOLS IN THE TABLES




Beam angle in degrees °

PRODUCT-SPECIFIC SYMBOLS



PRODUCT-SPECIFIC SYMBOLS

Aluminium

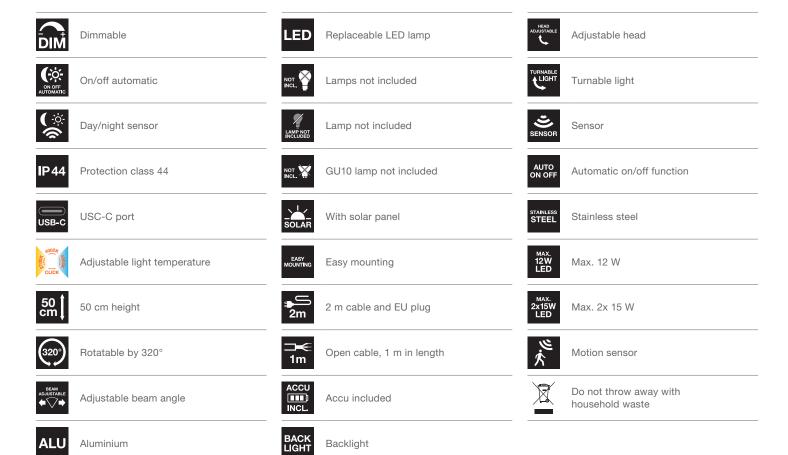

Backlight





ABOUT LEDVANCE

With business activities in over 140 countries, LEDVANCE is one of the world's leading companies in the field of general lighting. Originating from the general lighting division of OSRAM GmbH, LEDVANCE 's portfolio includes LED lamps and luminaires, intelligent lighting products, traditional lamps and renewable energy solutions. #POWERTHROUGHLIGHT

LEDVANCE GmbH Parkring 1-5 85748 Garching Germany www.ledvance.com

Customer Service Centre: kundenservice.retail@ledvance.com Germany: Phone: +49 89 780673-660 Austria: Phone: +43 1 68068

LEDVANCE is a licensee for the product trademark OSRAM for lamps & luminaire products in general lighting.