

PRODUCT DATASHEET

SP AIR FIX P 6W 927 PS DIM IP65 BK

SPOT AIR FIX | Recessed mounted spotlight for low energy- and narrow ceilings, fixed



PERFOR-
MANCE
CLASS

Areas of application

- Direct replacement for recessed spotlights with halogen lamps
- Ceilings in low energy houses
- General illumination
- Hotel rooms and corridors
- Bars, restaurants
- Accent lighting
- Residential interiors

Product benefits

- Airtight construction for reduced air-leakage and limited energy loss
- Coverable by many types of thermal insulation material
- Low profile enables installation into shallow ceiling voids
- Powerselect: Brightness adjustment via dip switches on the driver
- Easy replacement of external driver thanks to plug with bayonet lock
- Easy installation and electrical connection thanks to tool-free electrical connectors
- SCALE Design – great appearance, valuable materials and small size fits into every surrounding
- 5 years guarantee

Product features

- Color rendering index R_a : 90
- Type of protection: IP65 (room side)
- Beam angle: 36°
- Die-cast aluminum housing
- Silicon-pad protected springs



- Dimmable (with many common dimmers, see also www.ledvance.com/dim)
- Through-wiring possible


TECHNICAL DATA

Electrical data


Nominal wattage	6 W / 4 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	28mA / 20 mA
Inrush current	2 A
Inrush current time T_{h50}	60 μ s
Max. number of luminaires per miniature circuit breaker B16	457
Max. number of luminaires per miniature circuit breaker C10	285
Max. number of luminaires per miniature circuit breaker C16	457
Power factor λ	0.90
Total harmonic distortion	< 30 %
Protection class	II
Surge capability (L-N)	1 kV
Surge capability (L/N-Ground)	1 kV
Operating mode	Electronic control gear (ECG)
Dimming interface	Phase Cut

Photometrical data

Luminous flux	510 lm / 340 lm
Total luminous flux of contained light sources	450 lm
Luminous efficacy	85 lm/W
Color temperature	2700 K
Reference control setting of contained light source (Kelvin)	2700 K
Light color (designation)	Warm white
Color rendering index Ra	90
Standard deviation of color matching	≤ 3 sdc _{cm}
Luminous intensity	1060 cd
Low flicker	Yes
Flickering metric (Pst LM)	< 1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	36 °
UGR	< 28

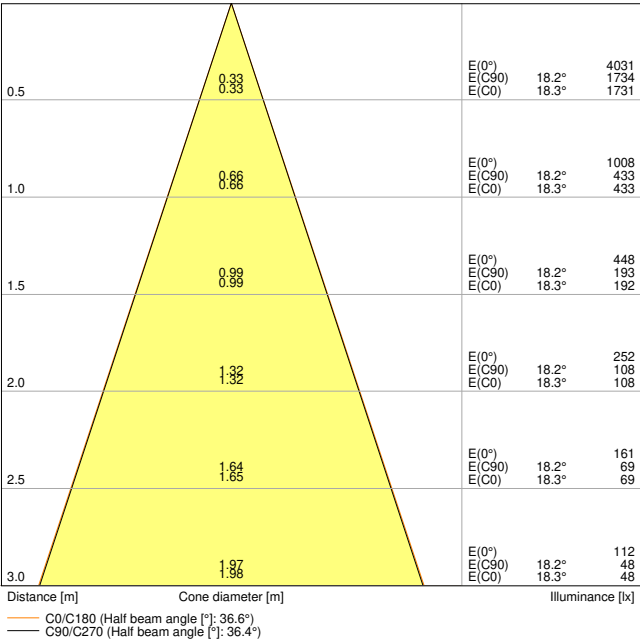


SP AIR FIX P 6W 927 PS DIM IP65 BK

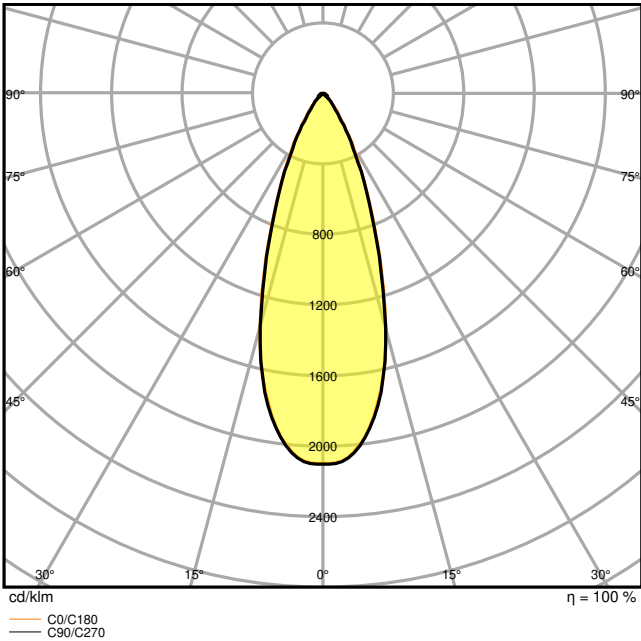

SP AIR FIX P 6W 927 PS DIM IP65 BK

Dimensions & Weight

Diameter	81.00 mm
Height	34.00 mm
Product weight	215.00 g



SP AIR FIX P 6W PS DIM IP65

Materials & Colors

Product color	Black
Housing color	Black
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	PMMA
Glow Wire Test according to IEC 60695-2-12	650 °C

Mercury content	0.0 mg
-----------------	--------

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push terminal
Type of protection	IP65~IP20
Protection class IK (shock resistance)	IK03
Dimmable	Yes
Type of dimming	PHASE CUT
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting diameter	68 mm
Mounting depth	35,0 mm
Adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Lifespan L80/B10 at 25 °C	41000 h ¹⁾
Lifespan L80/B50 at 25 °C	41000 h
Lifespan L90/B10 at 25 °C	18000 h
Number of switching cycles	30000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	140 mA
ECG - Output ripple current	< 10 %
ECG - Length	68.00 mm
ECG - Width	55,0 mm
ECG - Height	22,0 mm

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC / EPD
-----------	---

Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
EPD	LEDV-00015-V01.01-EN
Replaceable light source (EPREL)	Not replaceable

Additional product data

Added function	MULTI SELECT
----------------	--------------

Accessories Optional

Product image	Product name	EAN
	CONNECTOR BOX 3POLE L/N/E	4099854013508
	SP HOLDER DN68 H65	4099854013478

EQUIPMENT / ACCESSORIES

- External control gear included with dip-switches to select power during installation

Safety advice

- If there is a moisture barrier foil, the spacer SP HOLDER must be used!
- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	UI SP AIR FIX P
	Addon technical information	Dimmerlist SPOT GEN2
	Legal information	Light source Insert SP AIR FIX P PS DIM IP65


Documents and certificates		Document name
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11235002
	Legal information	Legal Insert G11147513
	Declarations of conformity	CE Declaration of Conformity SPOT DIM
	Declarations of conformity UKCA	UKCA Declaration of Conformity SPOT DIM
	Declarations of conformity UKCA	SP DIM
	Certificates	SP GEN2
Photometric and lighting design files		Document name
	IES file (IES)	SP AIR FIX P 6W 927 PS DIM IP65 BK
	LDT file (Eulumdat)	SP AIR FIX P 6W 927 PS DIM IP65 BK
	ULD file (DIALux)	SP AIR FIX P 6W 927 PS DIM
	ROLF file (RELUX)	SP AIR FIX P 6W 927 PS
	UGR file (UGR table)	SP AIR FIX P 6W 927 PS DIM IP65 BK
	Light distribution curve type cone	SP AIR FIX P 6W 927 PS DIM IP65 BK
	Light distribution curve type polar	SP AIR FIX P 6W 927 PS DIM IP65 BK
CAD/BIM files		Document name
	BIM Revit 3D	SP AIR FIX 6W G2
	CAD STEP 3D	SP AIR FIX
Tender texts		Document name
	Tender documents	SPOT AIR FIX 6W 927 PS DIM IP65 BK-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854000188	Folding box 1	100 mm x 105 mm x 85 mm	259.00 g	0.89 dm³
4099854000195	Shipping box 20	562 mm x 230 mm x 195 mm	5530.00 g	25.21 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



SPOT AIR FIX

Dimensions: 68 mm (width), 300 mm (length), Ø85 mm (height)

Features: 0-10V, 3-25, >35, 3A, AIR FLOW, V-A, IP20, IP65

SP AIR FIX	✓	✓	✗	✗
SP AIR ADJUST	✓	✗	✗	✗
Preset	ON	ON	ON	ON
1 2	1 2	1 2	1 2	1 2
Current (CC)	85 mA	140 mA	180 mA	140 mA
Power	4 W	6 W	8 W	6 W
% rated lumen FIX	80 %	100 %	130 %	100 %
% rated lumen ADJ	100 %	130 %	200 %	130 %

References / Links

– For Guarantee see www.ledvance.com/guarantee

Legal advice

– Installation hints in the current user instruction (www.ledvance.com) must be observed

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.