


# PRODUCT DATASHEET

## Essential Panel Square 600x600mm 36W 830 White

Essential Panel Square | Essential Panel Ceilings for easy use

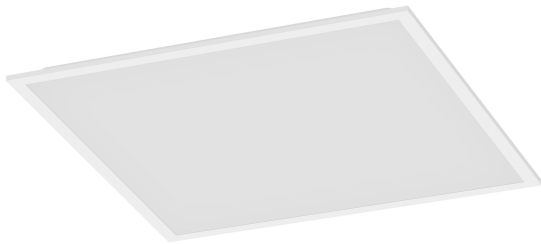

---

### Areas of application

- Living areas (living rooms, dining rooms, bedrooms etc.)

---

### Product benefits

- Long lifetime thanks to LED technology
- Excellent price/performance ratio

---

### Product features

- LED ceiling luminaires with aluminum frame
- Color temperature: 3,000 K
- Lifetime up to 25,000 h
- Type of protection: IP20

---

**TECHNICAL DATA****Electrical data**


|                                                             |               |
|-------------------------------------------------------------|---------------|
| Nominal wattage                                             | 36.00 W       |
| Nominal voltage                                             | 220...240 V   |
| Mains frequency                                             | 50/60 Hz      |
| Nominal current                                             | 175 mA        |
| Inrush current                                              | 0.175 A       |
| Inrush current time $T_{h50}$                               | 860 $\mu$ s   |
| Max. number of luminaires per miniature circuit breaker B16 | 13            |
| Max. number of luminaires per miniature circuit breaker C10 | 13            |
| Max. number of luminaires per miniature circuit breaker C16 | 21            |
| Power factor $\lambda$                                      | > 0.9         |
| Total harmonic distortion                                   | 20 %          |
| Protection class                                            | II            |
| Operating mode                                              | Mains voltage |

**Photometrical data**

|                                                |                    |
|------------------------------------------------|--------------------|
| Luminous flux                                  | 3200 lm            |
| Total luminous flux of contained light sources | 4300 lm            |
| Luminous efficacy                              | 89 lm/W            |
| Color temperature                              | 3000 K             |
| Light color (designation)                      | Warm White         |
| Color rendering index Ra                       | > 80               |
| Standard deviation of color matching           | 6 sdc <sub>m</sub> |
| Flickering metric (Pst LM)                     | <1                 |
| Stroboscope effect metric (SVM)                | <0.4               |
| Photobiological safety group acc. to EN62778   | RG0                |
| Beam angle                                     | 110 °              |

**Dimensions & Weight**

|                |           |
|----------------|-----------|
| Length         | 595.00 mm |
| Width          | 60.00 mm  |
| Height         | 595.00 mm |
| Product weight | 1900.00 g |



PANEL ESSENTIAL 60X60 36W840  
WT

Materials & Colors

|                                            |                  |
|--------------------------------------------|------------------|
| Product color                              | White            |
| Housing color                              | White            |
| Body material                              | Aluminum Steel   |
| Cover material                             | Polystyrene (PS) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C           |

Application & Mounting

|                                        |                         |
|----------------------------------------|-------------------------|
| Ambient temperature range              | -20...+40 °C            |
| Temperature range at storage           | -20...+70 °C            |
| Type of connection                     | Terminal, 2-Pole (L, N) |
| Type of protection                     | IP20                    |
| Protection class IK (shock resistance) | IK02                    |
| Dimmable                               | No                      |
| Mounting type                          | Surface                 |
| Mounting location                      | Wall / Ceiling          |
| With light source                      | Yes                     |
| Replaceable light source               | No                      |

Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 25000 h <sup>1)</sup> |
| Number of switching cycles | 12500                 |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Emergency lighting

|                                  |      |
|----------------------------------|------|
| Type of emergency operation test | None |
|----------------------------------|------|

Certificates & Standards

|                                                      |                 |
|------------------------------------------------------|-----------------|
| Standards                                            | CE / UKCA       |
| Luminaire with limited surface temperature, "D sign" | No              |
| Ball shot safe                                       | No              |
| Replaceable light source (EPREL)                     | Not replaceable |

#### Additional product data

|                |                               |
|----------------|-------------------------------|
| Product remark | Available from September 2025 |
|----------------|-------------------------------|

#### EQUIPMENT / ACCESSORIES

- Mounting screws and dowels included

#### Safety advice

- Luminaire must be disconnected from mains during installation, maintenance and cover removal
- Check wall-ceiling for suitability. If uncertain, seek professional advice.
- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.

#### DOWNLOAD DATA

| Documents and certificates                                                         |                                        | Document name                    |
|------------------------------------------------------------------------------------|----------------------------------------|----------------------------------|
|  | User instruction / safety instructions | Panel Essential Rectangular      |
|  | Declarations of conformity             | CE Declaration Panel Essential   |
|  | Declarations of conformity UKCA        | UKCA Declaration Panel Essential |

#### LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                 |
|---------------|------------------------------|--------------------------------------|--------------|------------------------|
| 4058075854635 | Folding box<br>1             | 92 mm x 647 mm x 638 mm              | 2639.00 g    | 37.98 dm <sup>3</sup>  |
| 4058075854642 | Shipping box<br>4            | 660 mm x 385 mm x 660 mm             | 11662.00 g   | 167.71 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

