

PRODUCT DATASHEET

LISOEV 1465x31 25 17W 940 S130

LINEAR INDIVIDUAL LIGHT SOURCES INDIRECT | Upgrade or replacement light source unit for indirect, diffuse light distribution



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Easy installation, no tools required for connection
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90

Product features

- Indirect, diffuse light distribution
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Beam angle: 90°


TECHNICAL DATA

Electrical data


Nominal wattage	17.00 W
Nominal voltage	45 V
Nominal current	350.000 mA

Photometrical data

Luminous flux	2500 lm
Luminous efficacy	147 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdc _{cm}
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	130 °
UGR	19

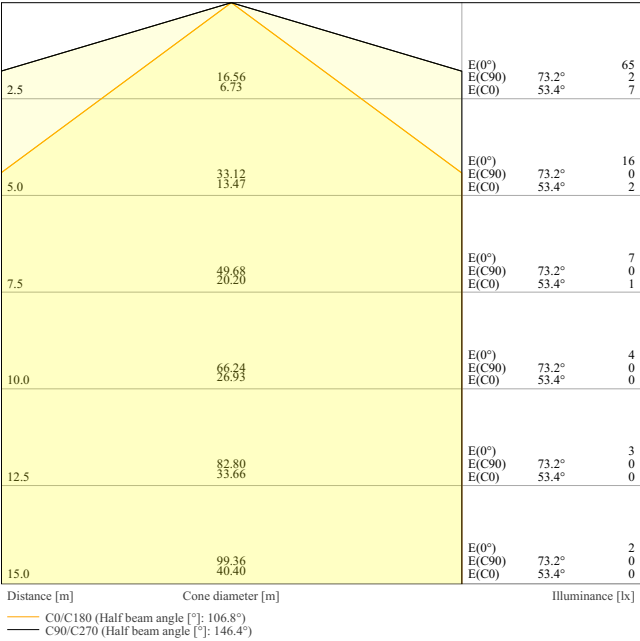

LISOEV 1465X31 25 17W 940 S130 LEDV 350mA

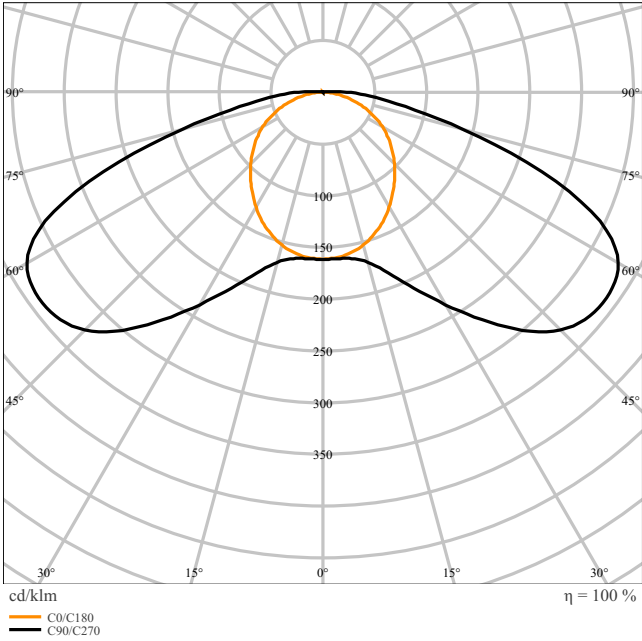

LISOEV 1465X31 25 17W 940 S130 LEDV 350mA

Dimensions & Weight

Length	1465.00 mm
--------	------------

Width	31.00 mm
Height	11.00 mm
Product weight	337.00 g
Cable length	100.000



1 5m INDIRECT LED MODULE

Materials & Colors

Product color	Grey
Housing color	Grey

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push-in clamp
Type of protection	IP20
Dimmable	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h
Lifespan L80/B10 at 25 °C	70000 h
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
-----------	---------------------------------------

Additional product data

Product remark	Available from September 2025
----------------	-------------------------------

Safety advice

– All electrical connections must be made by a qualified person.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	User instruction G11244437
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11218810
	Legal information	Legal Insert G11244392
	Legal information	LSI insert G11244301
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LISOEV 1465X31 25 17W 940 S130 LEDV 350mA
	LDT file (Eulumdat)	LISOEV 1465X31 25 17W 940 S130 LEDV 350mA
	Light distribution curve type cone	LISOEV 1465X31 25 17W 940 S130 LEDV 350mA
	Light distribution curve type polar	LISOEV 1465X31 25 17W 940 S130 LEDV 350mA
CAD/BIM files		Document name
	CAD STEP 3D	LN INDV INDIRECT G2 LISOEV 1500

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854285028	Folding box 1	36 mm x 1,472 mm x 17 mm	417.00 g	0.90 dm ³
4099854285035	Shipping box 10	1,484 mm x 184 mm x 67 mm	4270.00 g	18.29 dm ³
4099854285042	Shipping box 20	1,504 mm x 204 mm x 158 mm	9450.00 g	48.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

[illegible]

EIN	DIRECT		INDIRECT		EIN	LINEAR Indirect/EIN	
	EAN	LOCITY	EAN	LOCITY		EAN	LOCITY
430005402009	LOCITY 107-29-45 100 W 3047-19 SA	430005401678	LOCITY 100021-29 100 W 3047-19 SA	430005401680	LOCITY 100021-29 100 W 3047-19 SA	608850246702	D 100 P PLAN WGS PS IS BK
						608850246703	D 100 P PLAN WGS PS IS BK
						608850246704	D 100 P PLAN WGS PS IS BK
						608850246705	D 100 P PLAN WGS PS IS BK
						608850246706	D 100 P PLAN WGS PS IS BK
430005402006	LOCITY 107-29-45 100 W 3047-19 SA	430005401678	LOCITY 100021-29 100 W 3047-19 SA	430005401680	LOCITY 100021-29 100 W 3047-19 SA	608850246707	D 100 P PLAN WGS PS IS BK
						608850246708	D 100 P PLAN WGS PS IS BK
						608850246709	D 100 P PLAN WGS PS IS BK
						608850246710	D 100 P PLAN WGS PS IS BK
						608850246711	D 100 P PLAN WGS PS IS BK
430005402110	LOCITY 100021-29 100 W 3047-19 SA	430005401678	LOCITY 100021-29 100 W 3047-19 SA	430005401680	LOCITY 100021-29 100 W 3047-19 SA	608850246712	D 100 P PLAN WGS PS IS BK
						608850246713	D 100 P PLAN WGS PS IS BK
						608850246714	D 100 P PLAN WGS PS IS BK
						608850246715	D 100 P PLAN WGS PS IS BK
						608850246716	D 100 P PLAN WGS PS IS BK
430005402108	LOCITY 100021-29 100 W 3047-19 SA	430005401678	LOCITY 100021-29 100 W 3047-19 SA	430005401680	LOCITY 100021-29 100 W 3047-19 SA	608850246717	D 100 P PLAN WGS PS IS BK
						608850246718	D 100 P PLAN WGS PS IS BK
						608850246719	D 100 P PLAN WGS PS IS BK
						608850246720	D 100 P PLAN WGS PS IS BK
						608850246721	D 100 P PLAN WGS PS IS BK
430005402203	LOCITY 107-29-45 100 W 3047-19 SA	430005401678	LOCITY 100021-29 100 W 3047-19 SA	430005401680	LOCITY 100021-29 100 W 3047-19 SA	608850246722	D 100 P PLAN WGS PS IS BK
						608850246723	D 100 P PLAN WGS PS IS BK
						608850246724	D 100 P PLAN WGS PS IS BK
						608850246725	D 100 P PLAN WGS PS IS BK
						608850246726	D 100 P PLAN WGS PS IS BK
430005402204	LOCITY 107-29-45 100 W 3047-19 SA	430005401678	LOCITY 100021-29 100 W 3047-19 SA	430005401680	LOCITY 100021-29 100 W 3047-19 SA	608850246727	D 100 P PLAN WGS PS IS BK
						608850246728	D 100 P PLAN WGS PS IS BK
						608850246729	D 100 P PLAN WGS PS IS BK
						608850246730	D 100 P PLAN WGS PS IS BK
						608850246731	D 100 P PLAN WGS PS IS BK

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.