

# PRODUCT DATASHEET

## SMART+ MATTER Floodlight 30W Multicolour

SMART+ MATTER Floodlights | Floodlights with MATTER technology



### Areas of application

- Building facades

### Product benefits

- Easy and quick installation
- Colorful garden lighting with smart and intelligent control options
- Combines the functionality of general lighting and mood lighting

### Product features

- Controllable via voice control available: Google Assistant or Amazon Alexa
- RGB color control, approx. 16 million color options adjustable
- Dimmable
- Color temperature: 3,000 K (Warm White)
- Mounting bracket for up to 180° tilting
- Type of protection: IP65
- Connection via 0.5 m cable, wiring required
- Controllable via SMART+ App (with minimum Android 8.0 or iOS 14.0) or any other Matter-compatible platforms
- Network protocol: Matter over WiFi (2.4 GHz)



## TECHNICAL DATA

### Electrical data


Nominal wattage	30.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	135 mA
Inrush current	20 A
Inrush current time $T_{h50}$	200 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	13
Max. number of luminaires per miniature circuit breaker C16	19
Power factor $\lambda$	0.90
Total harmonic distortion	< 20 %
Protection class	I
Operating mode	Mains voltage

### Photometrical data

Luminous flux	2400 lm
Total luminous flux of contained light sources	2700 lm
Luminous efficacy	80 lm/W
Color temperature	3000 K
Light color (designation)	RGBW
Color rendering index Ra	> 80
Standard deviation of color matching	< 6 sdcm
Luminous intensity	1000 cd
Photobiological safety group acc. to EN62778	RG1
Beam angle	100 °

### Dimensions & Weight

Length	175.00 mm
Width	32.00 mm
Height	211.00 mm
Product weight	650.00 g

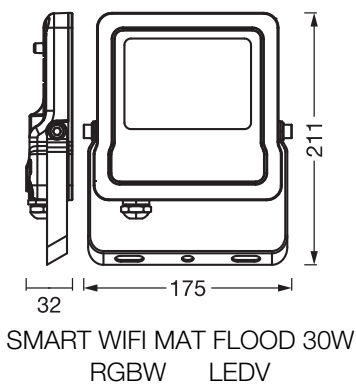

Materials & Colors

Product color	Dark grey
Housing color	Dark grey
Body material	Aluminum
Cover material	Glass
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-20...+85 °C
Type of connection	Cable, 3-pole
Type of protection	IP65/IP65
Protection class IK (shock resistance)	IK05
Dimmable	No
Mounting type	Surface
Mounting location	Wall
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	30000 h
Number of switching cycles	15000

Emergency lighting

Type of emergency operation test	None
----------------------------------	------

## Certificates & Standards

Standards	CE / UKCA
Luminaire with limited surface temperature, "D sign"	No
Replaceable light source (EPREL)	Not replaceable

## Additional product data

Product remark	Reset settings to default by switching the product on for three seconds and off for three seconds and repeating this five times.
----------------	--




## EQUIPMENT / ACCESSORIES

- Mounting bracket included
- Mounting screws and dowels included
- Control via app or voice control requires compatible Smart home system
- For control via SMART+ App, a smartphone or tablet is required (with minimum Android 8.0 or iOS 14.0)

## Safety advice

- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.
- Product in protection class I. All electrically conductive, metallic housing parts that can absorb voltage during operation or during maintenance in the event of a fault must be continuously connected to the protective earthing conductor.
- To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.

## DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	UI - SMART WIFI MAT FLOOD LEDV
	Legal information	SMART WIFI MAT FLOOD
	Legal information	SMART WIFI MAT FLOOD

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854740060	Folding box 1	200 mm x 46 mm x 222 mm	720.00 g	2.04 dm <sup>3</sup>
4099854740077	Shipping box 12	419 mm x 295 mm x 246 mm	9102.00 g	30.41 dm <sup>3</sup>

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
--------------	------------------------------	--------------------------------------	--------------	--------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### References / Links

– Further information and frequently asked questions (FAQs) at [www.ledvance.com/en-int/home-lighting/services/faq](http://www.ledvance.com/en-int/home-lighting/services/faq)

---

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.