


## PRODUCT DATASHEET

### PL-CN111-COB- 4300-830-40D-G1

PrevaLED® COIN 111 COB G1 | LED modules with integrated optics and heat sink

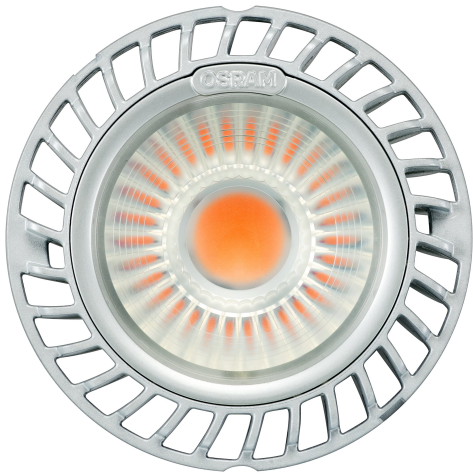

## TECHNICAL DATA

### Electrical data

Nominal wattage	37.6 W
Construction wattage	37.60 W
Claimed equiv. conventional lamp power	100 W
Nominal voltage	35.8 V
Input voltage range	35...38 V
Type of current	DC
Nominal current	1050.000 mA

### Photometrical data

Total useful luminous flux [PICOS]	4340 lm
Luminous efficacy	115 lm/W
Luminous flux	4050 lm <sup>1)</sup>
Luminous intensity	8300 cd
Nom. useful luminous flux 120° [PICOS]	4340 lm
Color temperature	3000 K
Color rendering index Ra	≥80
Light color LED	White
Light color (designation)	Warm White
Standard deviation of color matching	3 sdcn
Rated peak intensity	8300 cd

1) 90°


### Light technical data

Beam angle	40°
Rated beam angle (half peak value)	40.00°
Starting time	0.0 s
Warm-up time (60 %)	0.00 s

### LED MODULE INFORMATION

Number of LEDs per module	1
---------------------------	---

### Dimensions & Weight



Length	111.0 mm
Cable length	500.000
Width	111.00 mm
Height	52.00 mm
Diameter	111,0 mm
Product weight	425.00 g

**Colors & materials**

Product color	White
---------------	-------

**Temperatures & operating conditions**

Ambient temperature range	-25...+40 °C
Maximum temperature at tc test point	100 °C
Temperature range in operation	-25...100 °C
Performance temp. acc. to IEC 62717	75 °C

**Lifespan**

Nominal lamp life time	50000 h
Number of switching cycles	100000

**Additional product data**

Product remark	Modules perfectly matched to OSRAM OPTOTRONIC® LED drivers (see relevant table) / For current photometric data and important safety, installation and application information, see <a href="http://www.osram.com/led-systems">www.osram.com/led-systems</a> . / All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values / Tolerance for optical and electrical data: +/-10%
----------------	---

**Capabilities**

Dimmable	Yes
----------	-----

### Certificates & Standards

Standards	Acc. to IEC 62471 / Acc. to IEC 60598-1 / Acc. to EN 60529 / Acc. to EN 62031 / Acc. to EN 55015 / Acc. to EN 61547
Type of protection	IP20
Energy consumption	41.35 kWh/1000h
Energy efficiency class	E
Energy class of contained light source	E

### LOGISTICAL DATA

Temperature range at storage	-40...80 °C
------------------------------	-------------

### Energy labelling regulation data acc EU 2019/2015

Lighting technology used	LED
--------------------------	-----

### DOWNLOAD DATA

Documents and certificates	Document name
----------------------------	---------------



Declarations of conformity

EU Declaration of Conformity of PL-CN COB G1 family



Certificates

685711\_ENEC CUBE G3

Photometric and lighting design files	Document name
---------------------------------------	---------------



IES file (IES)

PL-CN111-COB-4300-830-40D-G1



LDT file (Eulumdat)

PL CN111 COB 4300 830 40D G1 LDT 300420

### LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4052899541658	Folding box 1	131 mm x 118 mm x 59 mm	463.00 g	0.91 dm <sup>3</sup>
4052899541665	Shipping box 12	280 mm x 254 mm x 209 mm	5922.00 g	14.86 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.